



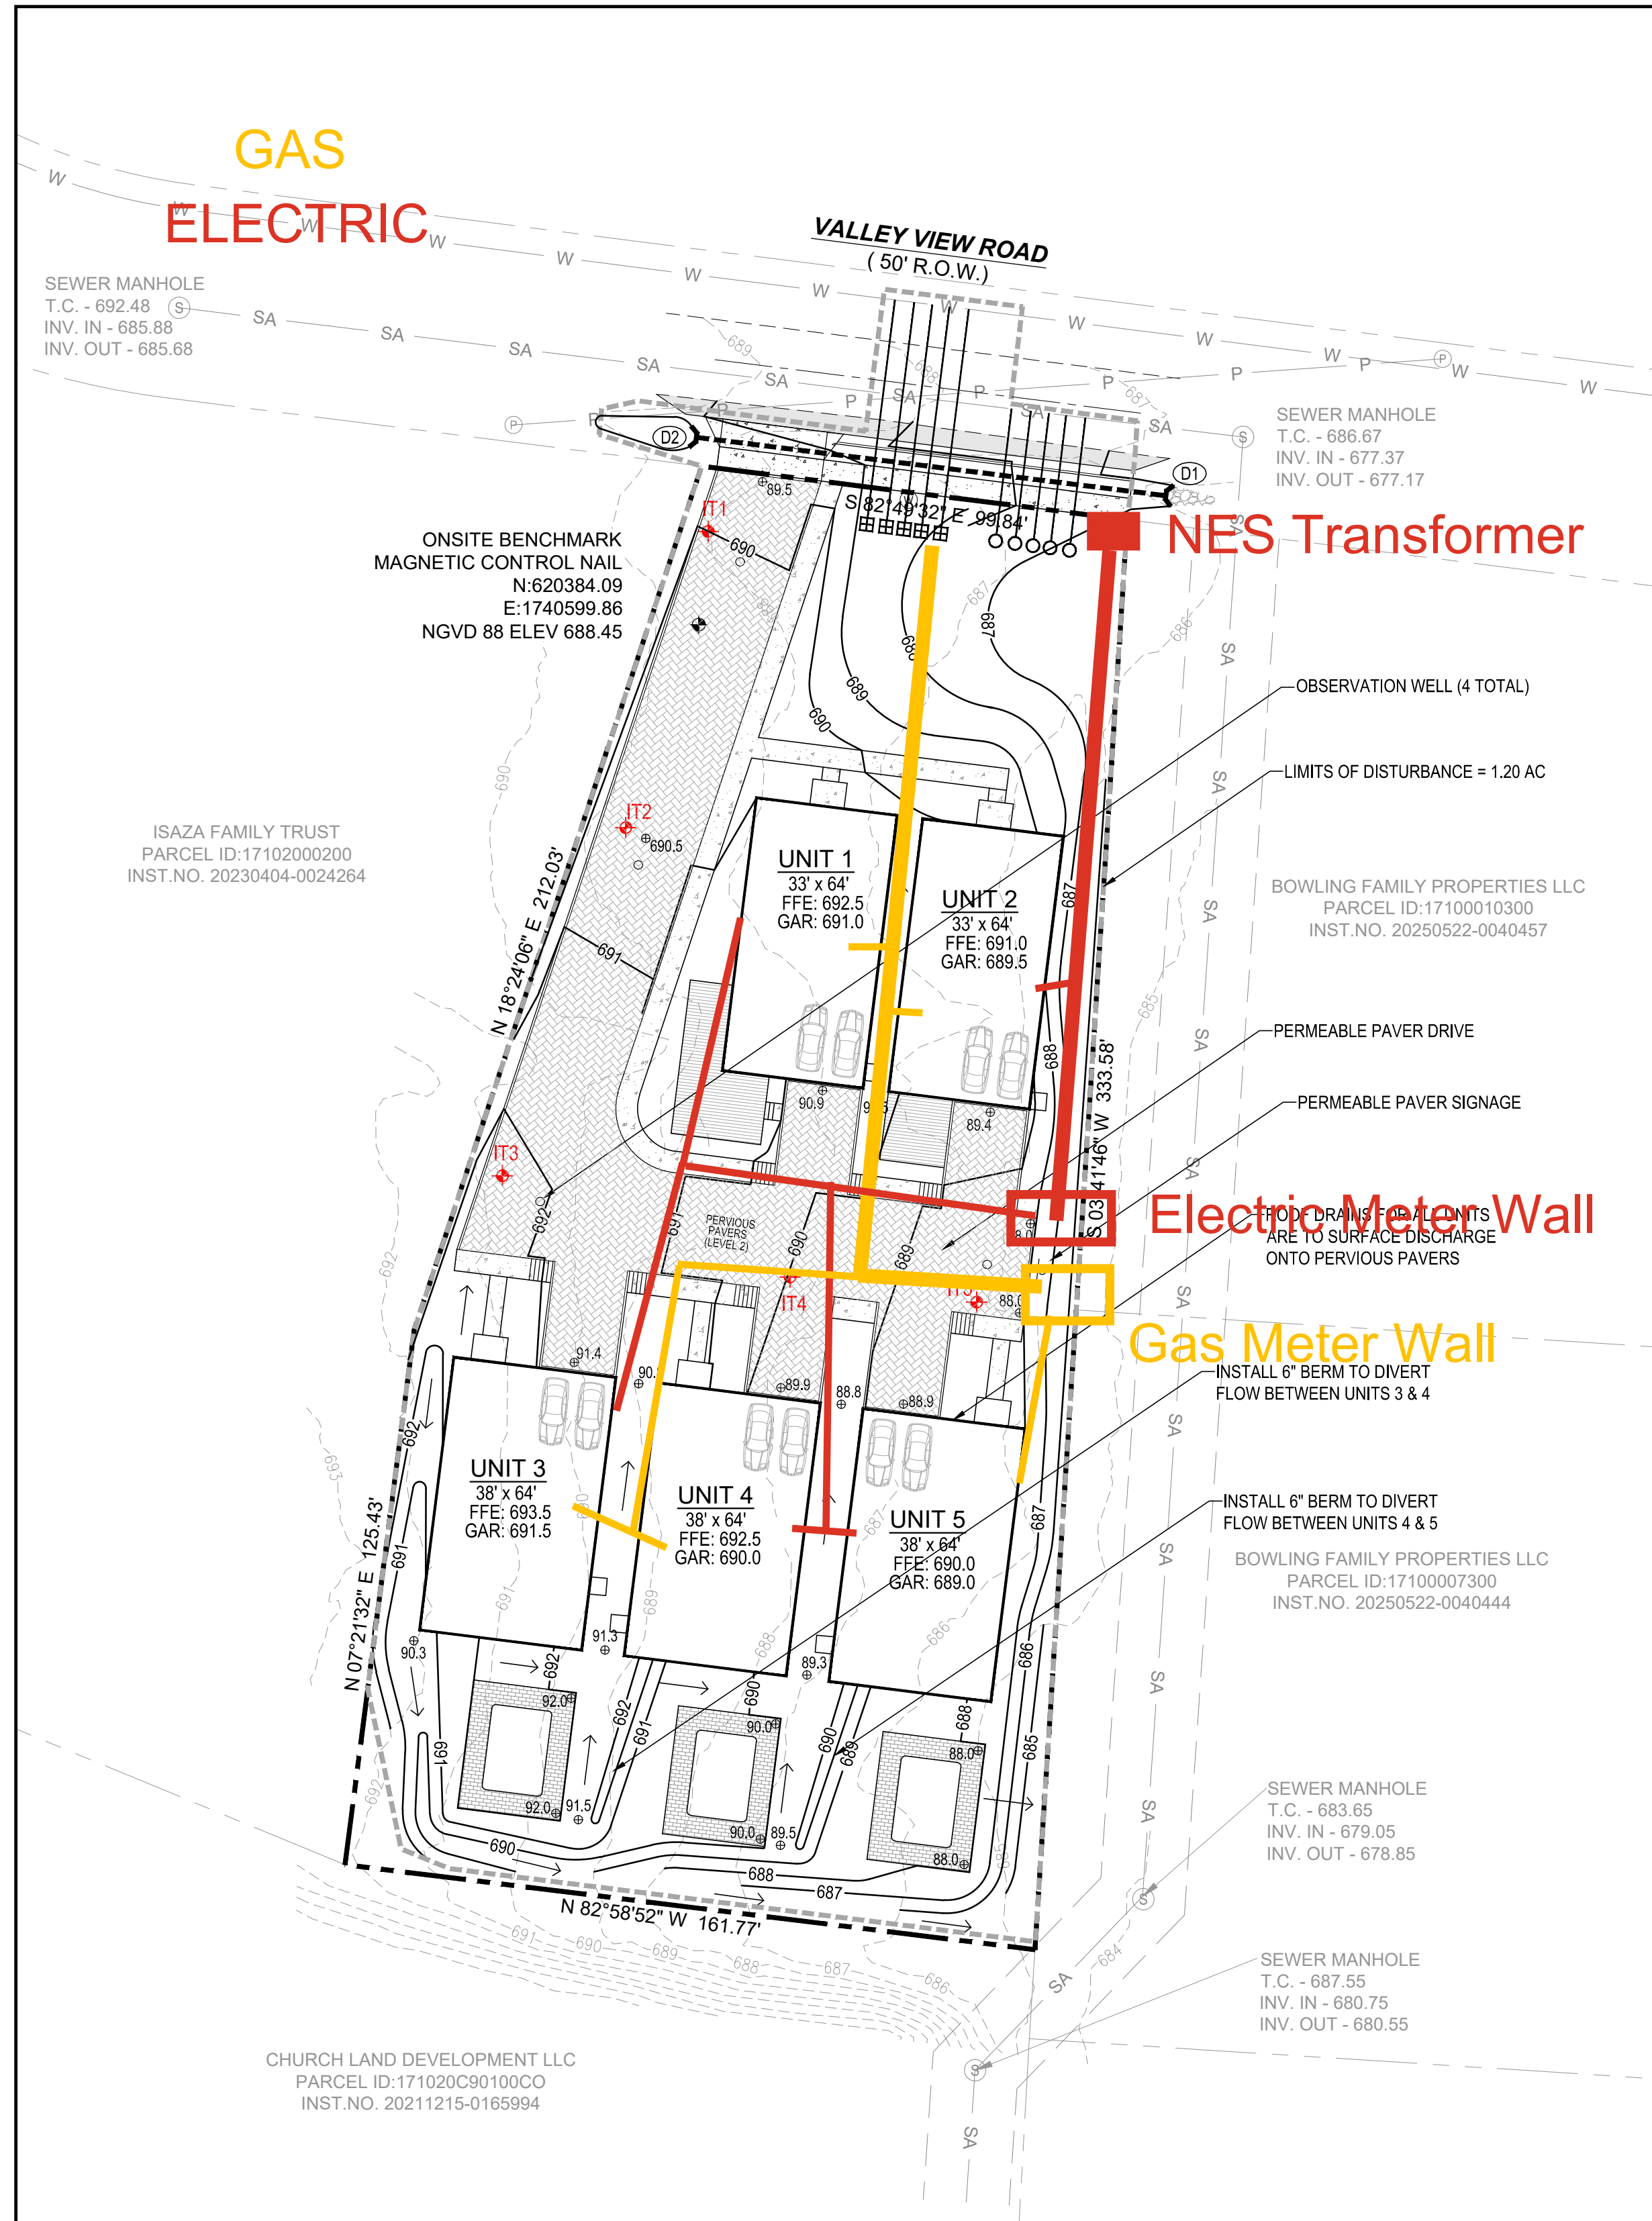

PERMEABLE PAVERS DETAIL (GIP-03)

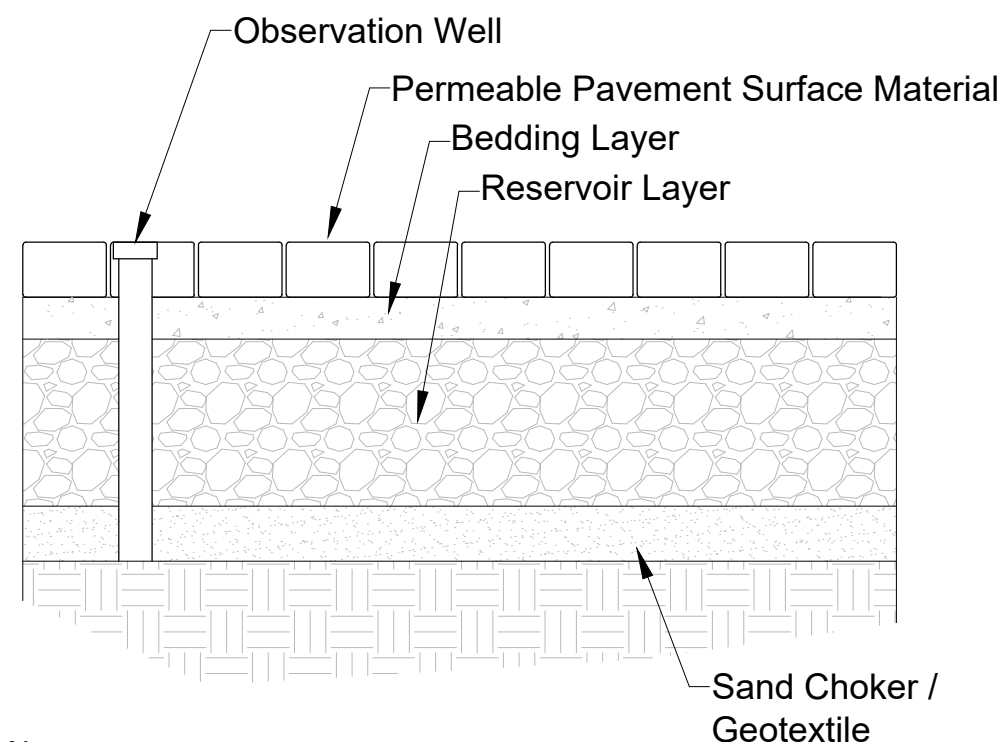

Detail Notes:

- Vehicular traffic shall be prohibited on the pervious pavement until the site is stable to prevent sediment from being deposited by vehicles.
- Contractor, Engineer, or Owners Representative shall notify MWS NPDES Staff at least 48 hours prior to the installation of the pervious layer to observe the sub-base material.

Permeable Pavers Without Underdrain Material Specifications		
Material	Specifications	Notes
Permeable Pavement System	Permeable Interlocking Concrete Pavers ¹	¹ ASTM C936
Bedding Layer *	#8 or #89 clean washed stone	Meet TDOT Construction Specifications.
Reservoir Layer *	#57 or #2 clean washed stone	Meet TDOT Construction Specifications.
Observation Well	6-inch SDR 35 PVC pipe with vented cap and anchor plate	Use traffic rated casting where required. Number of wells equals the number of test pits required for infiltration testing (see Appendix 1-A)
Sand Choker / Geotextile *	2- to 4-inch layer of coarse sand ¹ Filter fabric (125 gsm/sq.ft.)	¹ Meet TDOT Construction Specifications ² ASTM M288-06, ASTM D4491 & D4751

*Item receipts may be required to be included with as-built submittal.

Permeable Paver Number :		
	Design	As-Built
Treatment Volume (Tv), CF	7,354 CF	
Surface Area, SF	9,192 SF	
Overflow (TO) Elevation*	688.0	
Reservoir Depth	24"	
Underdrain Invert Depth*	N/A	
Outlet Elevation*	N/A	
* N/A if not required		
All elevations shall be NAVD88		

Developer Asbuilt Note

In accordance with the Metro Stormwater Management Manual, Volume 1, Section 3.9, As-Built Certifications, MWS Stormwater Division must approve the following as-builts prior to issuance of the Use & Occupancy Permit:



- A certification letter from TN registered P.E. stating that the site has been inspected and that the stormwater management system and stormwater control measures (both structural and non-structural) are complete and functional in accordance with the plans approved by MWS.
- An as-built LID spreadsheet.
- Hydrologic and hydraulic calculations for as-built conditions, as required.
- As-built drawings showing final topographic features of all these facilities. This shall include invert elevations of outlet control structures.
- Any deviations from the approved plans shall be noted on as-built drawings submitted.
- Copy of as-built plan CAD file on a CD and should be registered to the TN State Plane Coordinate System, North American Datum 1983 (NAD83). Data should be placed in separate layers and should be labeled / named for easy identification.
- Cut and fill balance certification for floodplain and sinkhole alterations.
- Water quality buffers shall be surveyed and included with the as-built submittal.
- Any public (to become the responsibility of Metro to maintain) stormwater infrastructure shall be video-inspected to verify proper installation with the video recording and any associated inspection report submitted as part of as-built record.
- Additional testing may be required as/if warranted by video inspection.

STORM STRUCTURE SCHEDULE

Structure Label	Structure Type	T.C. Elev.	Invert In	Invert Out
D1	18" Headwall	688.0	685.0	-----
D2	18" Headwall	690.5	-----	687.5


STORM PIPE SCHEDULE

Downstream Structure	Invert	Upstream Structure	Invert	Pipe Size	Length (ft)	Slope (%)
D1	685.8	D2	687.5	18" RCP	109	1.56

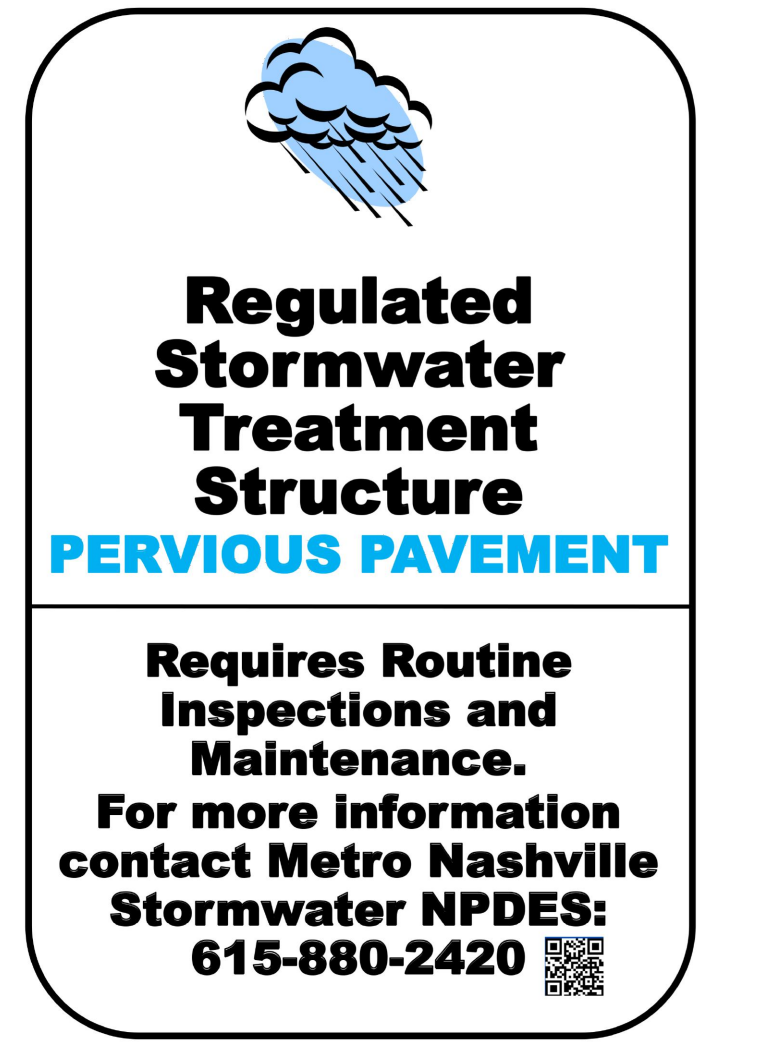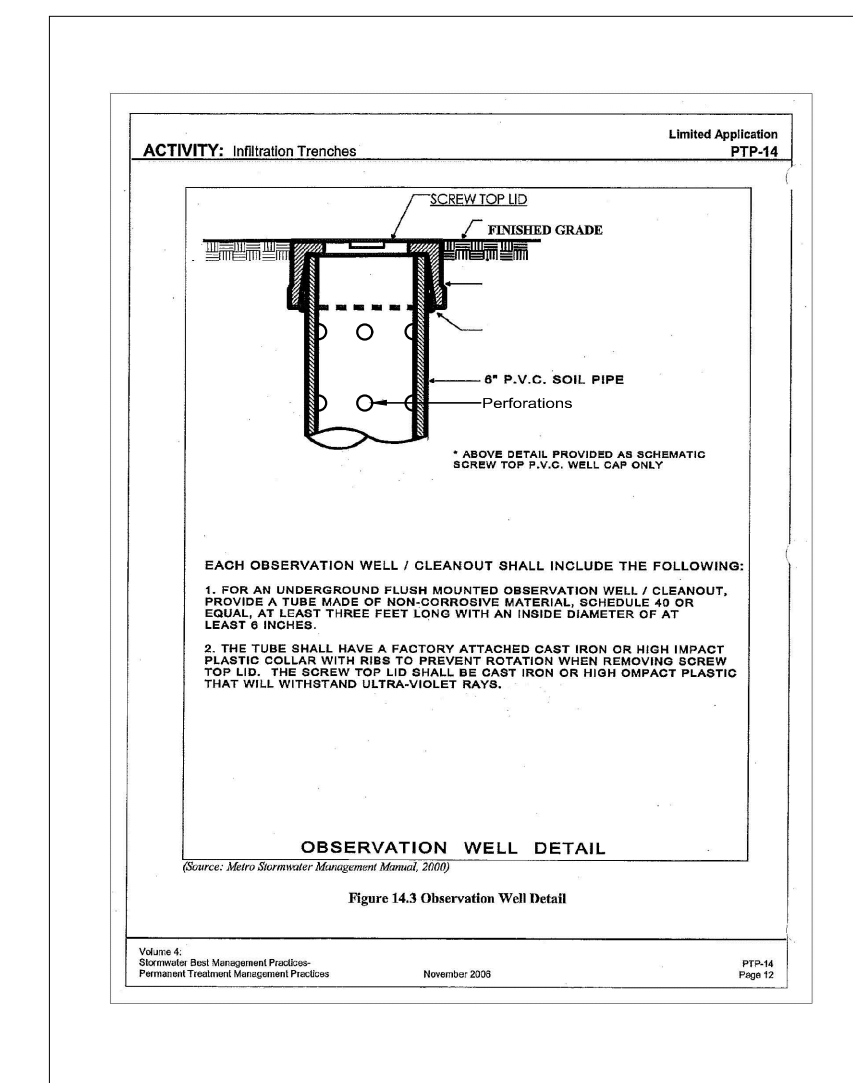



PERMEABLE PAVER PROFILE

SCALE
1" = 2' VERT.
1" = 40' HORIZ.

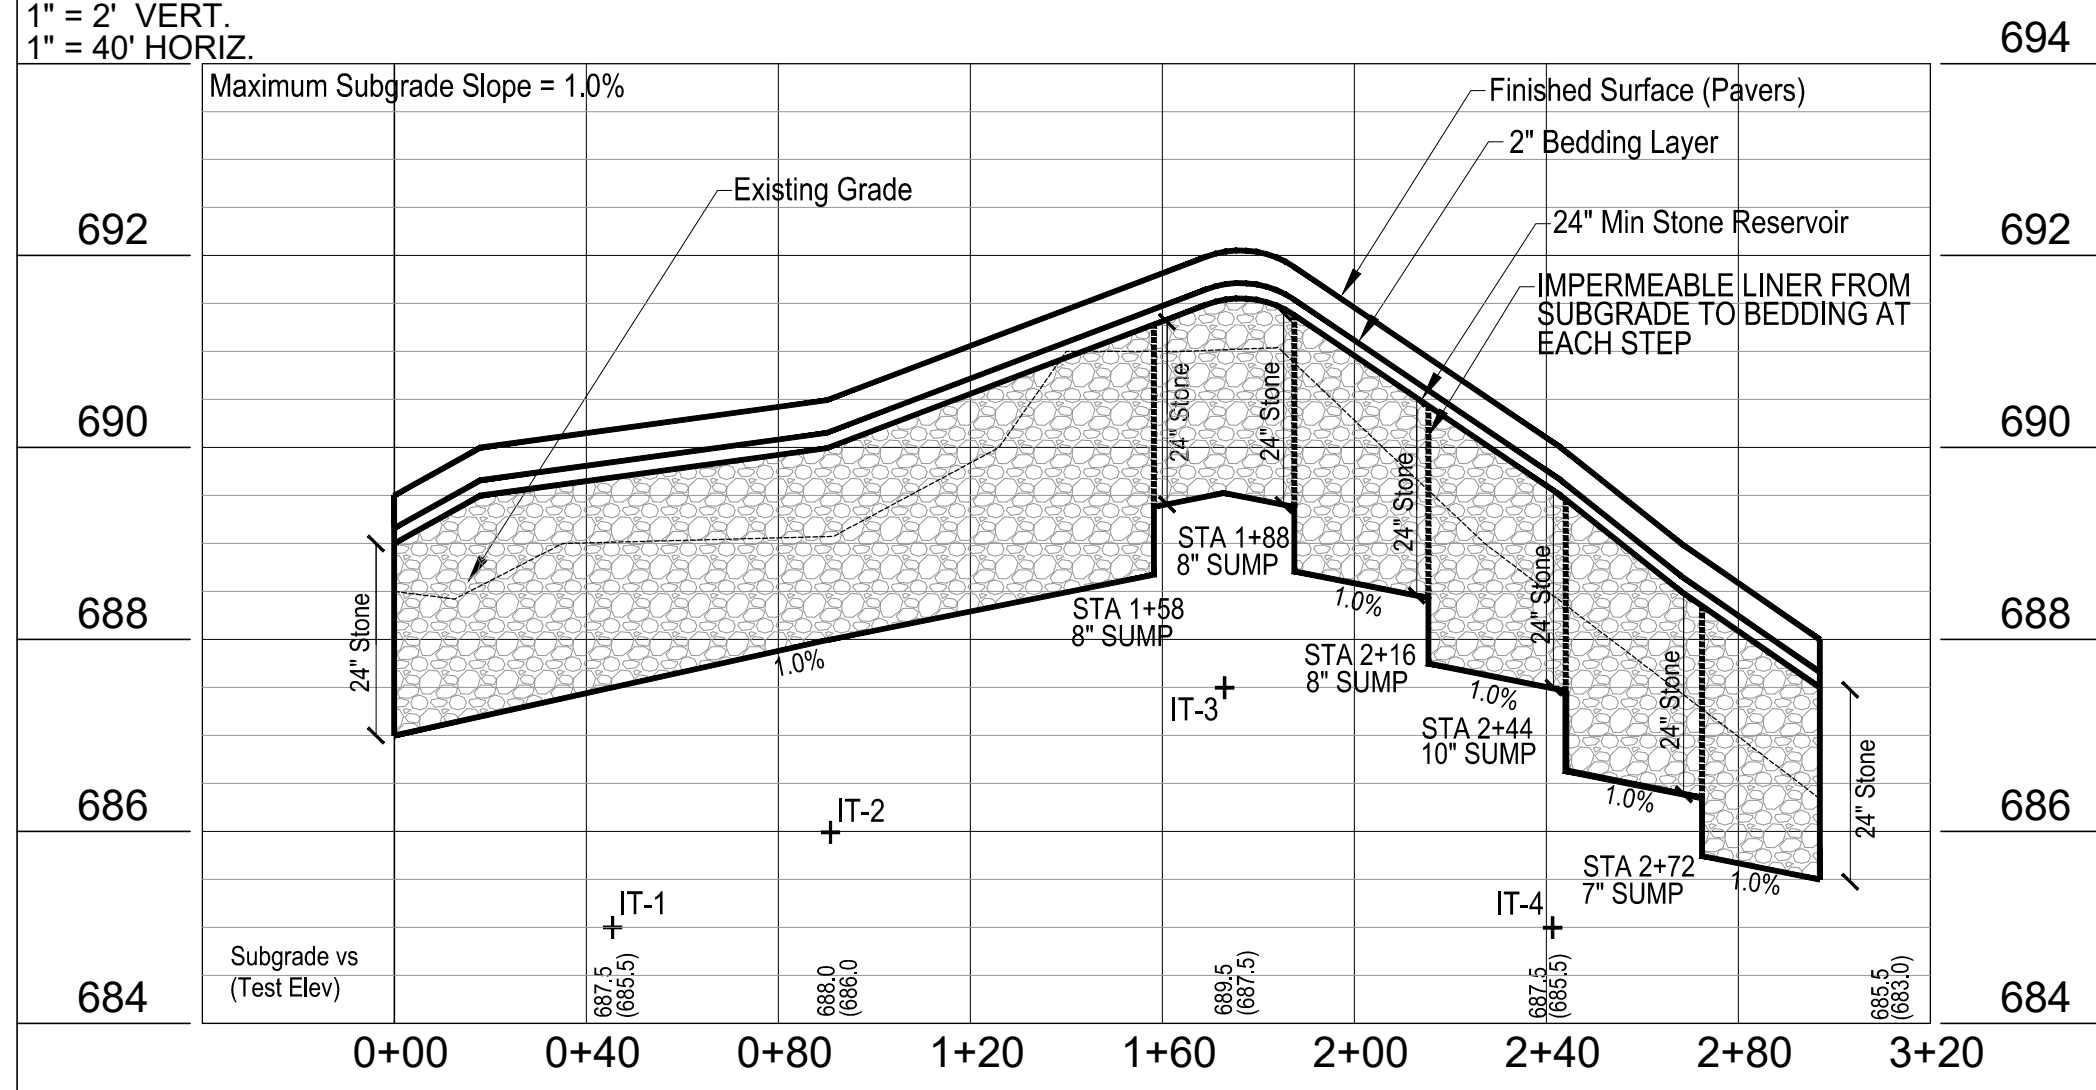

STORM INFRASTRUCTURE PROFILE
STRUCTURE D1 - D2

SCALE
1" = 2' VERT.
1" = 40' HORIZ.

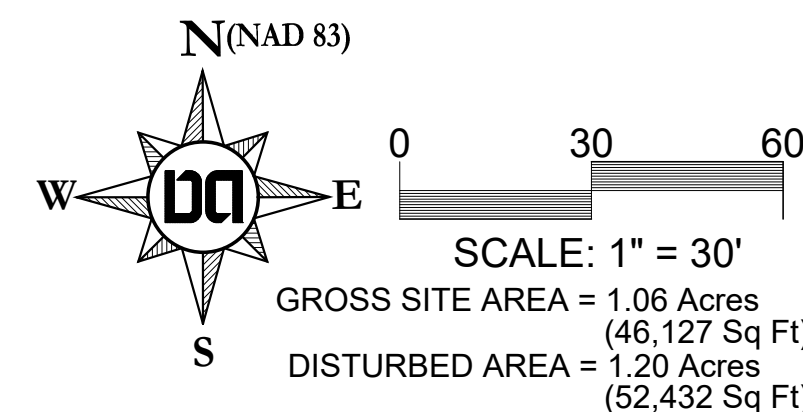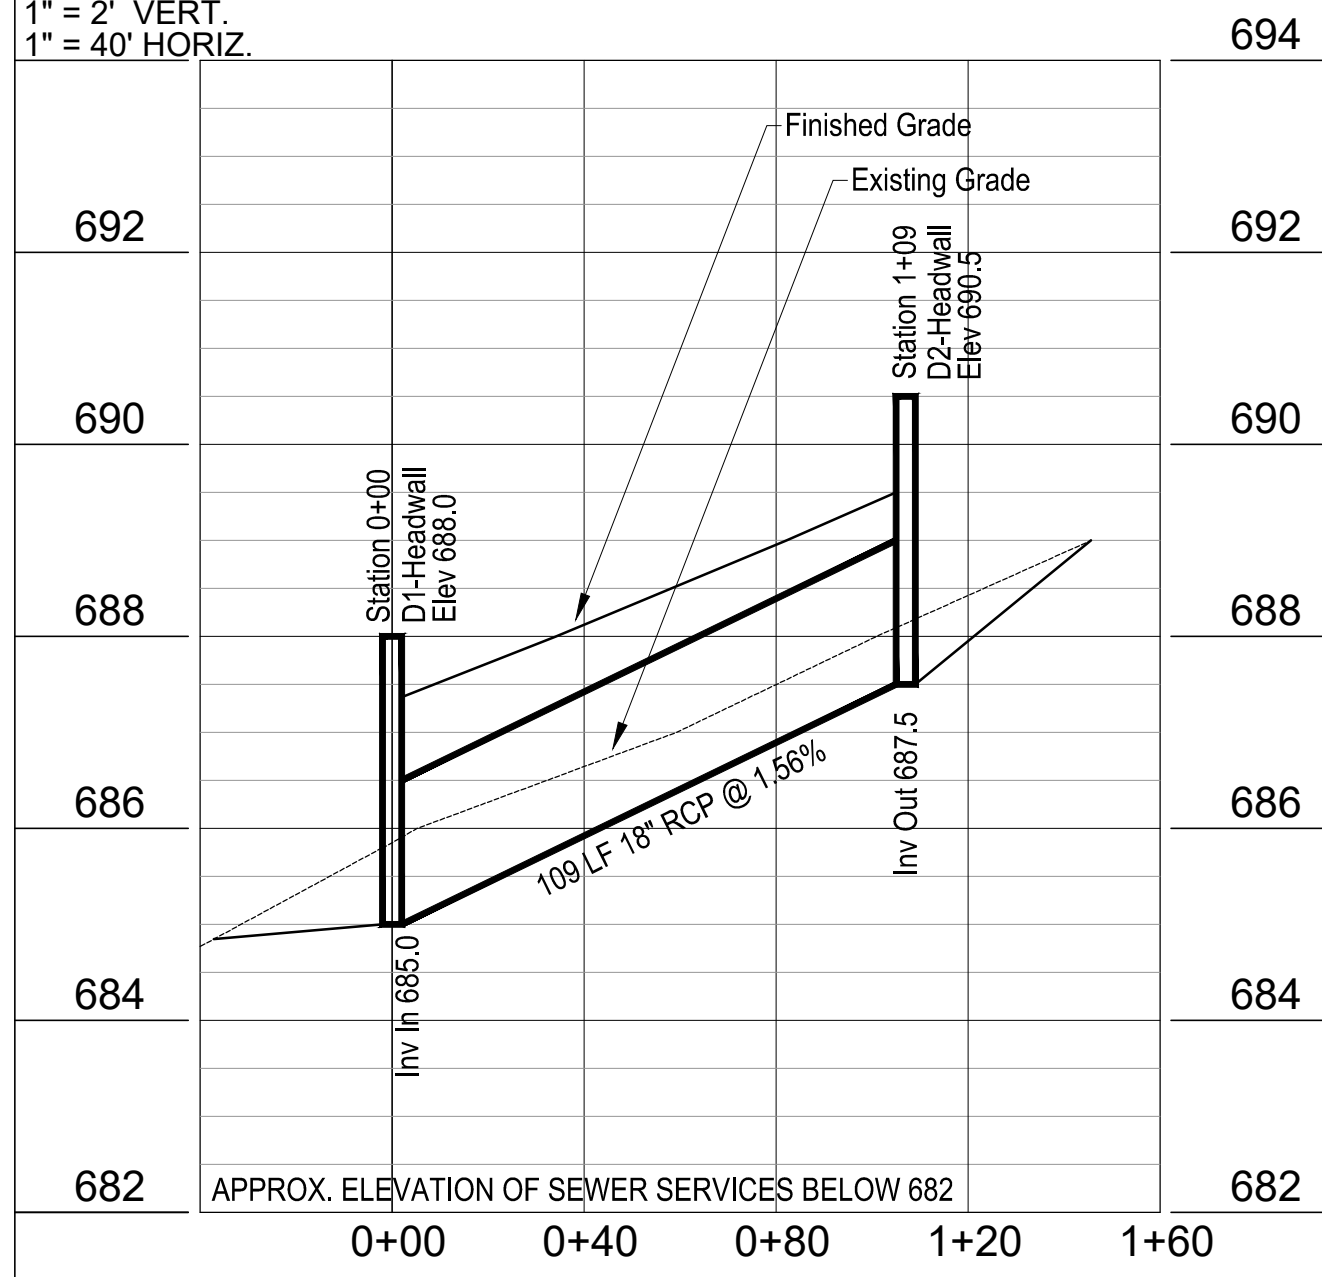

Permits	
MPC Case No	2024SP-039-002
SWGR	2025095494
MWS (Sewer)	2025-----

Dale & Associates

Civil Engineering
Land Planning & Zoning
Surveying

Drawing Date:
August 2025


Revisions

Final SP

5655 Valley View

Parcel 74 on Tax Map 171

Brentwood, Davidson County, Tennessee

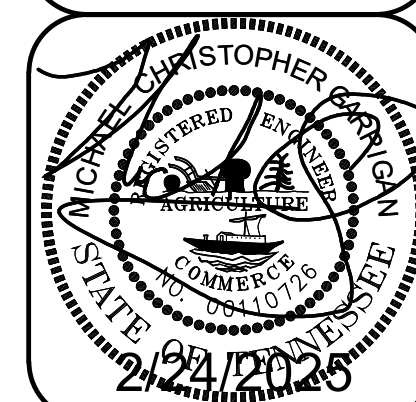

Site Grading &
Drainage Plan

D&A Project #25095
Brentwood Chase 3
5655 Valley View

C3.0