

Erosion Control and Grading Notes

- Expose as small an area of soil as possible on the site for no more than 15 days. Keep dust within tolerable limits by sprinkling or other acceptable means.
- All cut/fill areas to have a minimum of 6" of topsoil cover. Areas dressed with topsoil shall receive 12 lbs. per 1000 sq. ft. of 10-10-10 fertilizer (unless otherwise specified in written specifications), 5 lbs. or more of Kentucky 31 fescue seed per 1000 sq. ft., and a straw mulch cover of 70%-80% coverage (approximately 125 lbs. per 1000 sq. ft.), unless otherwise noted within written specifications.
- Erosion control barrier is called out on plans and is to comply with the Metropolitan stormwater management manual, volume four, section TCP-14.
- Disturbed areas are to be graded to drain as indicated in the plan to sediment barriers during and upon the completion of construction.
- The contractor shall be responsible for the verification and the location of any existing utilities. It shall be the responsibility of the contractor to avoid damage to all existing utilities during construction. If damage does occur to any such installation, full repair will be accomplished as per the current specification governing such work.
- Any access routes to the site shall be based with crushed stone, ASTM #1 stone, 100' long and at least 6" thick.
- The placing and spreading of any fill material is to be started at the lowest point and brought up in horizontal layers of 8" thickness (or as directed by the soils investigative report). Said fill material is to be free of sod, roots, frozen soils, or any other decomposable material. Said fill is to be compacted to a minimum of 95% standard proctor, or as otherwise specified by the soils report or written specifications.
- The contractor shall notify the Metro Davidson County department of Public Works construction compliance division, three days prior to beginning the work.
- The contractor shall locate and stake the layout of the site in the field for inspection by the engineer. The contractor shall check the grades and final dimensions on the ground, and report any discrepancies to the engineer immediately for a decision.
- Surplus excavation of topsoil shall be placed on the site as approved by the owner for the purpose of future landscape use.
- The contractor shall furnish and install all necessary temporary works for the protection of the public and employees, including warning signs and lights.
- The contractor shall be responsible for any damage done to the premises or adjacent premises or injuries to the public during the construction caused by himself, his sub-contractors, or the carelessness of any of his employees.
- All work is to be completed with compliance to the rules and regulations set forth by Metro Water Services. The contractor shall give all necessary notice, obtain all permits, and pay fees required for the completion of his portion of the work. He shall also comply with all city, county and state laws and ordinance or regulations relating to portions of work which he is to perform.
- All erosion control measures shall remain in place until site is stabilized & construction is complete.
- Contractor to provide an area for concrete wash down and equipment fueling in accordance with metro CP-10 and CP-13, respectively. Contractor to coordinate exact location with NPDES department during the pre-construction meeting. Grading permittee to include bmp's designed to control site wastes such as discarded building materials, chemicals, litter and sanitary wastes that may cause adverse impacts to water quality. The location of and/or notes referring to said bmp's shall be shown on the EPSC plan.
- The buffer along waterways will be an area where the surface is left in a natural state, and is not disturbed by construction activity. This is in accordance with the Stormwater Management Manual Volume 1 - Regulations.
- Drawing is for illustration purposes to indicate the basic premise of the development, as it pertains to Storm Water approval /comments only. The final lot count and details of the plan shall be governed by the appropriate Storm Water regulations at the time of final application.

Landscape Notes

- The landscape contractor shall coordinate all construction with the appropriate utility company and shall be responsible for and damage to utilities. the landscape contractor shall verify the exact location of all utilities and take precautions to prevent damage to the utilities.
- All planting and mulch beds shall be sprayed with round-up (contractor's option) prior to the installation of mulch.
- Plant materials and stumps indicated for removal shall be removed and disposed off-site by the contractor. Backfill holes with topsoil free of roots and rocks.
- The landscape contractor shall be responsible for the fine grading of all planting areas.
- All planting areas shall be fertilized with 12#/1000 s.f. of 10-10-10 fertilizer.
- All planting beds shall have a minimum of 3" depth of shredded hardwood bark mulch.
- The landscape contractor shall verify all material quantities. In the event of a discrepancy, the quantities shown on the plan will take precedence.
- The landscape contractor shall provide the owner with written instructions on the proper care of all specified plant materials prior to final payment.
- Existing trees to remain shall be protected from construction damage. Selectively prune dead wood.
- All disturbed areas shall be planted with turf as indicated on the materials schedule.
- All deciduous trees, existing and proposed shall be pruned to provide 4' minimum clear trunk unless otherwise noted.
- The landscape contractor shall provide a one year warranty on all plant materials and replace any dead or dying material within that time period.
- No plant materials should be substituted without authorization by Dale & Associates. Plant sizes shown are minimums required by the local municipality and materials shown have been selected specifically for this project.
- All wire baskets shall be completely removed and disposed of, burlap should be removed or punctured in at least 5 places. Remove all twine from burlapped materials.
- Guying is not allowed unless required by municipality or site conditions. The landscape contractor shall remove wires after a one year period.
- No canopy tree shall be located within 15' of an overhead utility. No tree shall be located within a public utility easement. Locating plant materials within a drainage easement is acceptable, but only if installed as not to disturb existing drainage flow. In such instances, the materials shall be located no closer than 5' from the centerline of drainage.
- Lighting plan to be coordinated with proposed planting plan. no light poles to be located in tree islands. See lighting plan for proposed light locations.

NDOT Notes

- All work within the public right of way requires an excavation permit from NDOT.
- Proof-rolling of all street subgrades is required in the presence of the NDOT inspector. Inspection of the binder course is required prior to final paving in the presence of the NDOT. These requests are to be made 24 hours in advance.
- Stop signs are to be 30 inch by 30 inch.
- Street signs to have six inch white letters on a nine inch green aluminum blade, high intensity reflective.
- All pavement marking are to be thermoplastic.
- Final construction plans and road grades shall comply with the design regulations established by NDOT. Slopes along roadways shall not exceed 3:1.

Architectural Notes

Building elevations for all street and open space-facing facades shall be provided with the final site plan. The following standards shall be met:

- All homes to have a minimum 2 car garage.
- Homes fronting on Valley View to have a Minimum 3600 Sq. Ft.
- Interior Homes to have a Minimum of 2500 Sq. Ft.
- Building facades fronting a street or open space shall provide a minimum of one principal entrance (doorway) and a minimum of 25% glazing.
- Windows shall be vertically oriented at a ratio of 2:1 or greater except for Dormers.
- EIFS, Vinyl Siding, and Untreated Wood, Shall be Prohibited.
- Units that Abutt Valley View Drive Must Face Valley View, Units in the Interior of the Site must face the Interior Private Street.

Standard SP Notes

- The purpose of this SP is to obtain Final Site Plan approval for 5 detached multifamily units on 5655 Valley View Road within the Brentwood Chase 3 SP. Short term rental property owner & non owner occupied shall be prohibited
- Any excavation, fill or disturbance of the existing ground elevation must be done in accordance with Storm Water Management Ordinance No. 78-840 & Approved by the Metropolitan Department of Water Services.
- This property does not lie within a flood hazard area as identified by FEMA ON MAP 47037C0367J, Dated: April 5, 2017.
- All public sidewalks are to be constructed in conformance with metro public works sidewalk design standards.
- Wheel chair accessible curb ramps, complying with applicable metro public works standards, shall be constructed at street crossings.
- The required fire flow shall be determined by the metropolitan fire marshal's office, prior to the issuance of a building permit.
- Size driveway culverts per the design criteria set forth by the Metro Stormwater Manual (minimum driveway culvert in Metro right of way is 18" RCP).
- Metro Water Services shall be provided sufficient & unencumbered ingress & egress at all times in order to maintain, repair, replace & inspect any stormwater facilities within the property.
- Individual water and/or sanitary sewer service lines are required for each unit.
- Solid waste pickup to be provided by individual roll-away cans.
- Landscape and tree density requirements per Metro Zoning Ordinance.
- Minor modifications to the preliminary SP plan may be approved by the Planning Commission or its designee based upon final architectural, engineering or site design and actual site conditions. All modifications shall be consistent with the principles and further the objectives of the approved plan. Modifications shall not be permitted, except through an ordinance approved by Metro Council that increase the permitted density or floor area, add uses not otherwise permitted, eliminate specific conditions or requirements contained in the plan as adopted through this enacting ordinance, or add vehicular access points not currently present or approved. The requirements of the Metro Fire Marshal's Office for emergency vehicle access and adequate water supply for fire protection must be met prior to the issuance of any building permits.
- For any development standards, regulations and requirements not specifically shown on the SP plan and/or included as a condition of commission or council approval, the property shall be subject to the standards, regulations and requirements of the RM6 zoning district as of the date of the applicable request or application.
- The final Site Plan/building permit site plan shall depict any required public sidewalks, any required grass strip or frontage zone and the location of all existing and proposed vertical obstructions within any required sidewalk and grass strip or frontage zone. Prior to the issuance of use and occupancy permits, existing vertical obstructions shall be relocated outside of any required sidewalk. Vertical obstructions are only permitted within any required grass strip or frontage zone.

Council Bill BL2025-758

An ordinance to amend Title 17 of the Metropolitan Code of Laws, the Zoning Ordinance of The Metropolitan Government of Nashville and Davidson County, by changing from R40 to SP zoning for properties located at 5633, 5637, 5639, 5645, 5651, 5651, 5651, 5655, 5655 Valley View Road, approximately 960 feet south of Old Hickory Blvd (15 acres), to permit 71 multi family residential units, all of which is described herein (Proposal No. 2024SP 039 001).

NOW, THEREFORE, BE IT ENACTED BY THE COUNCIL OF THE METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY:

Section 1. That Title 17 of the Code of Laws of The Metropolitan Government of Nashville and Davidson County, is hereby amended by changing the Official Zoning Map for Metropolitan Nashville and Davidson County, which is made a part of Title 17 by reference, as follows:By changing from R40 to SP zoning for properties located at 5633, 5637, 5639, 5645, 5651, 5651, 5651, 5655, 5655 Valley View Road, approximately 960 feet south of Old Hickory Blvd (15 acres), to permit 71 multi family residential units, being Property Parcel Nos. 043-044, 46-048 and 074 as designated on Map 171 and Property Parcel Nos. 001-002 as designated on Map 071-02 of the Official Property Identification Maps of The Metropolitan Government of Nashville and Davidson County, all of which is described by lines, words and figures on the plan that was duly considered by the Metropolitan Planning Commission, and which is on file with the Metropolitan Planning Department and Metropolitan Clerk's Department and made a part of this ordinance though copied herein.

Section 2. Be it further enacted, that the Metropolitan Clerk is hereby authorized and directed, upon the enactment and approval of this ordinance, to cause the change to be made on Map 171 and Map 171-02 of said Official Zoning Map for Metropolitan Nashville and Davidson County, as set out in Section 1 of this ordinance, and to make notation thereon of reference to the date of passage and approval of this amendatory ordinance.

Section 3. Be it further enacted, that the uses of this SP shall be limited to a maximum of 71 detached multi-family residential unit. Short Term Rental Property (STRP) owner-occupied and not owner occupied shall be prohibited.

- Section 4. Be it further enacted, that the following conditions shall be completed, bonded, or satisfied as specifically required:
- On the corrected copy, remove four of the private drive accesses onto Valley View Road, leaving one at the northern end of the site, one near the central portion, and one at the southeastern corner.
 - On the corrected copy, remove or relocate the units in the northwestern corner of the site that are shown north of the stream
 - Comply with all conditions and requirements of Metro Reviewing Agencies.
 - No master permit/HPR shall be recorded prior to final SP approval.
 - Final plat may be required prior to permitting, architectural standards outlined on the preliminary SP for review and approval.
 - With the submittal of the final site plan, provide architectural elevations complying with all architectural standards outlined on the preliminary SP for review and approval.
 - The final site plan shall depict the required public sidewalks, any required grass strip or frontage zone and the location of all existing and proposed vertical obstructions within the required sidewalk and grass strip or frontage zone. Prior to the issuance of use and occupancy permits, existing vertical obstructions shall be relocated outside of the required sidewalk. Vertical obstructions are only permitted within the required grass strip or frontage zone.
 - The Preliminary SP plan is the site plan and associated documents. If applicable, remove all notes and references that indicate that the site plan is illustrative, conceptual, etc.
 - The final site plan shall label all internal driveways as "Private Driveways." A note shall be added to the final site plan that the driveways shall be maintained by the Property Owners' Association.
 - The requirements of the Metro Fire Marshal's Office for emergency vehicle access and adequate water supply for fire protection must be met prior to the issuance of any building permits.

Section 5. Be it further enacted, a corrected copy of the preliminary SP plan incorporating the conditions of approval by Metro Council shall be provided to the Planning Department prior to or with final site plan application.

Section 6. Be it further enacted, minor modifications to the preliminary SP plan may be approved b) the Planning Commission or its designee based upon final architectural, engineering or site design and actual site conditions. All modifications shall be consistent with the principles and further the objectives of the approved plan. Modifications shall not be permitted, except through an ordinance approved by Metro Council that increase the permitted density or floor area, add uses not otherwise permitted, eliminate specific conditions or requirements contained in the plan as adopted through this enacting ordinance, or add vehicular access points not currently present or approved.

Section 7. Be it further enacted, if a development standard, not including permitted uses, is absent from the SP plan and/or Council approval, the property shall be subject to the standards, regulations and requirements of the RM6 zoning district as of the date of the applicable request or application. Uses are limited as described in the Council ordinance.

Section 8. The Metropolitan Clerk is directed to publish a notice announcing such change in a newspaper of general circulation within five days following final passage.

Section 9. This Ordinance shall take effect upon publication of above said notice announcing such change in a newspaper of general circulation. • the welfare of The Metropolitan Government of Nashville and Davidson County requiring it.

USE - CHAPTER 17.08 & 17.16

SPECIFIC PLAN DEVELOPMENT SUMMARY

PROPOSED USE	Multi-Family (5 Units)	
PROPERTY ZONING	SP	SURROUNDING ZONING R40, SP
USE CHARTS:	PERMITTED	

SITE CRITERIA

SUBDIVISION PLAT	Lot 1 Re-sub P/O Lot 58 Brentwood Gardens	
MINIMUM LOT SIZE	Not Applicable	
Floor Area Ratio	0.60 Maximum / 0.55 Proposed	
ISR - Adjustments / Slopes over 15%	0.80 Maximum / 0.59 Proposed	
STREET SETBACKS:	75' from Existing Right of Way	
SIDE YARD	10'	
REAR YARD	15' on Intermediate Lot Lines Within SP 20' Adjacent to Highlands of Brentwood Sub	
HEIGHT STANDARDS	2 Stories in 35' (Height is measured from the finish grade of the four most exterior corners of structure to the midpoint of the primary roof pitch or to the top of parapet for a flat roof)	

PARKING AND ACCESS - CHAPTER 17.20

RAMP LOCATION AND NUMBER	1 Ramp access on Valley View Road	
DISTANCE TO NEAREST EXISTING RAMP (MINIMUM 30')	175' West-5661 Valley View	
DISTANCE TO INTERSECTION	600' East to Cloverland Dr	
	50' MINOR STREET 100' COLLECTOR	185' ARTERIAL STREET 250' CONTROLLED ACCESS RAMP

REQUIRED PARKING BASED ON USES	2 Stalls per Unit =	10 Stalls
PROPOSED PARKING	10 Covered Stalls	
SPACE SIZES, AISLE WIDTHS, ANGLE DATA	8.5' x 18' (90°)	

REQUIRED LOADING BASED ON USES

SURFACING OVER 5 SPACES 1,750 SQ. FT.	None Required
QUEUING LANES	Not Applicable
OVER 10 SPACES 20' QUEUING AT EXIT	Provided
NUMBER OF COMPACT SPACES / %	None
NUMBER OF ACCESSIBLE SPACES	None Required
SIDEWALKS REQUIRED	Provided Along Public Rights of Way

LANDSCAPING STANDARDS - CHAPTER 17.24

REQUIRED BUFFERYARDS	Type 'B' Buffer using Existing Vegetation
BUFFERYARD ADJUSTMENT	Not Applicable
PERIMETER LANDSCAPING	Provided
STANDARD FOR 4 OR MORE LANES	Not Applicable

SIDE LINES ADJACENT TO PARKING AREAS 5' MINIMUM WITH TREES-2.5' WITH TREE ISLANDS	Provided
INTERIOR LANDSCAPING MINIMUM 8% AREA	Provided
OPAQUE FENCE ADJACENT TO RESIDENTIAL PARKING AREA	Provided

SCREENING AROUND DUMPSTERS (NO CHAIN LINK FENCE PERMITTED)

TREE DENSITY	See Landscape Compliance Plan
--------------	-------------------------------

SHEET SCHEDULE


- C0.0
- C0.1
- C1.0
- C2.0
- C2.1
- C3.0
- L1.0
- Cover Sheet
- Existing Conditions Plan
- Site Layout & Utility Plan
- Demolition & Initial Erosion Control Plan
- Intermediate & Final Erosion Control Plan
- Site Grading & Drainage Plan
- Landscape Plans

Final SP

Brentwood Chase 3

(5655 Valley View Road)

Metro Tax Map 171, Parcel 74
Brentwood, Davidson County, Tennessee
Case 2024SP-039-002

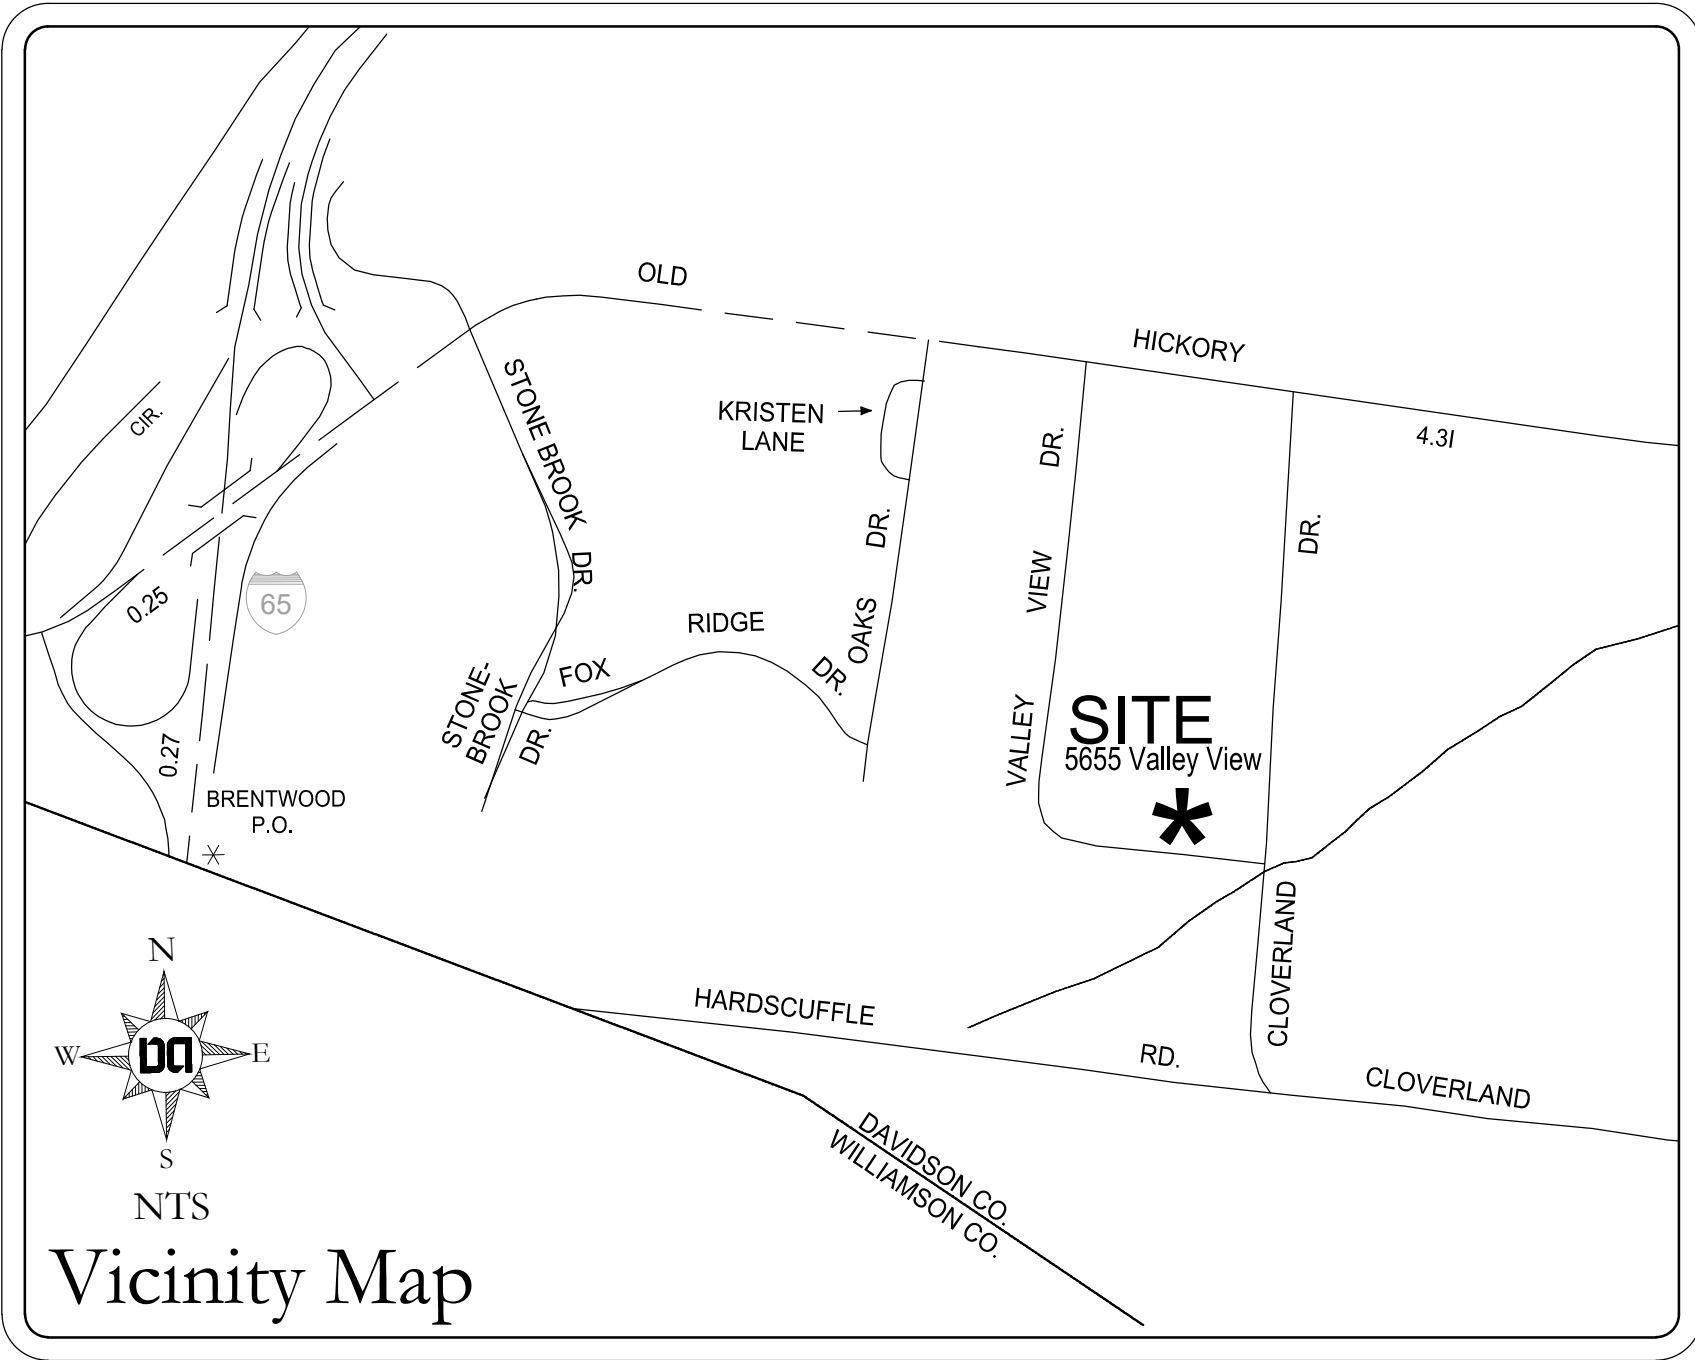


Property Information
Owner: Bars Hooper Holdings, LLC
5655 Valley View Road
Brentwood, Tennessee 37027
1.06 Acres (1.20 Acres Disturbed)
Council District 26: Courtney Johnston

Civil Engineer
Dale & Associates
516 Heather Place
Nashville, Tennessee 37204
Contact: Michael Garrigan, PE
Phone: 615.297.5166
Email: michael@daleandassociates.net

Surveyor
B2L Land Surveyors
1198 Old Pinnacle Road
Joelton, Tennessee 37080
Phone: 615.212.5703

Flood Note
This property is not located within a Flood Hazard Area (Zone X) as depicted on the current Flood Insurance Rate Map (FIRM) Number 47037C0367H dated April 5, 2017.

Benchmark
Magnetic Control Nail
N:620384.08
E:1740599.86
Elev: 688.45
NAVD88

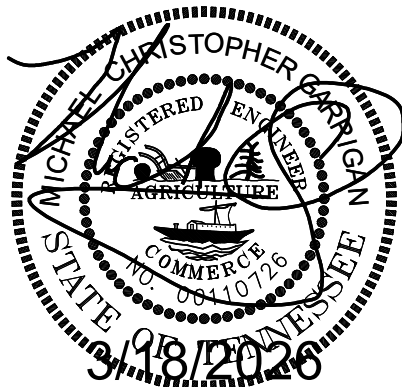

Dale & Associates
Civil Engineering
Land Planning & Zoning
Surveying
516 Heather Place
Nashville, TN 37204
(615) 297-5166

Permits	
MPC Case No	2024SP-039-002
SWGR	2025095494
MWS (Sewer)	2025-----

D&A Project #24102
5642 Valley View SP

C0.0

METRO WATER SERVICES - NASHVILLE, TN

APPROVED FOR CONSTRUCTION

THIS DOCUMENT HAS BEEN REVIEWED BY THE DEPARTMENT OF WATER AND SEWERAGE SERVICES OR CONTRACTED PROFESSIONAL, AND IS HEREBY APPROVED FOR CONSTRUCTION. THIS APPROVAL SHALL NOT BE CONSTRUED AS AN ASSURANCE THAT THE IMPROVEMENTS DEPICTED IN THE DOCUMENT BEARING THIS STAMP WILL FUNCTION AS INTENDED.

SWGR: 2025095494 - REV01
Date: 03/19/2026

APPROVAL EXPIRES ONE YEAR FROM THE DATE ABOVE

Council Bill BL2025-758

An ordinance to amend Title 17 of the Metropolitan Code of Laws, the Zoning Ordinance of The Metropolitan Government of Nashville and Davidson County, by changing from R40 to SP zoning for properties located at 5633, 5637, 5639, 5645, 5651, 5661, 5665, 5655 Valley View Road, approximately 960 feet south of Old Hickory Blvd (15 acres), to permit 71 multi family residential units, all of which is described herein (Proposal No. 2024SP 039 001).

NOW, THEREFORE, BE IT ENACTED BY THE COUNCIL OF THE METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY:

Section 1. That Title 17 of the Code of Laws of The Metropolitan Government of Nashville and Davidson County, is hereby amended by changing the Official Zoning Map for Metropolitan Nashville and Davidson County, which is made a part of Title 17 by reference, as follows:By changing from R40 to SP zoning for properties located at 5633, 5637, 5639, 5645, 5651, 5661, 5665, 5655 Valley View Road, approximately 960 feet south of Old Hickory Blvd (15 acres), to permit 71 multi family residential units, being Property Parcel Nos. 043-044, 46-048 and 074 as designated on Map 171 and Property Parcel Nos. 001-002 as designated on Map 071-02 of the Official Property Identification Maps of The Metropolitan Government of Nashville and Davidson County, all of which is described by lines, words and figures on the plan that was duly considered by the Metropolitan Planning Commission, and which is on file with the Metropolitan Planning Department and Metropolitan Clerk's Department and made a part of this ordinance though copied herein.

Section 2. Be it further enacted, that the Metropolitan Clerk is hereby authorized and directed, upon the enactment and approval of this ordinance, to cause the change to be made on Map 171 and Map 171-02 of said Official Zoning Map for Metropolitan Nashville and Davidson County, as set out in Section 1 of this ordinance, and to make notation thereon of reference to the date of passage and approval of this amendatory ordinance.

Section 3. Be it further enacted, that the uses of this SP shall be limited to a maximum of 71 detached multi-family residential unit. Short Term Rental Property (STRP) owner-occupied and not owner occupied shall be prohibited.

- Section 4. Be it further enacted, that the following conditions shall be completed, bonded, or satisfied as specifically required:
1. On the corrected copy, remove four of the private drive accesses onto Valley View Road, leaving one at the northern end of the site, one near the central portion, and one at the southeastern corner.
 2. On the corrected copy, remove or relocate the units in the northwestern corner of the site that are shown north of the stream.
 3. Comply with all conditions and requirements of Metro Reviewing Agencies.
 4. No master permit/HPR shall be recorded prior to final SP approval.
 5. Final plat may be required prior to permitting: architectural standards outlined on the preliminary SP for review and approval.
 6. With the submittal of the final site plan, provide architectural elevations complying with all architectural standards outlined on the preliminary SP for review and approval.
 7. The final site plan shall depict the required public sidewalks, any required grass strip or frontage zone and the location of all existing and proposed vertical obstructions within the required sidewalk and grass strip or frontage zone. Prior to the issuance of use and occupancy permits, existing vertical obstructions shall be relocated outside of the required sidewalk. Vertical obstructions are only permitted within the required grass strip or frontage zone.
 8. The Preliminary SP plan is the site plan and associated documents. If applicable, remove all notes and references that indicate that the site plan is illustrative, conceptual, etc.
 9. The final site plan shall label all internal driveways as "Private Driveways." A note shall be added to the final site plan that the driveways shall be maintained by the Property Owners' Association.
 10. The requirements of the Metro Fire Marshal's Office for emergency vehicle access and adequate water supply for fire protection must be met prior to the issuance of any building permits.



Section 5. Be it further enacted, a corrected copy of the preliminary SP plan incorporating the conditions of approval by Metro Council shall be provided to the Planning Department prior to or with final site plan application.

Section 6. Be it further enacted, minor modifications to the preliminary SP plan may be approved b) the Planning Commission or its designee based upon final architectural, engineering or site design and actual site conditions. All modifications shall be consistent with the principles and further the objectives of the approved plan. Modifications shall not be permitted, except through an ordinance approved by Metro Council that increase the permitted density or floor area, add uses not otherwise permitted, eliminate specific conditions or requirements contained in the plan as adopted through this enacting ordinance, or add vehicular access points not currently present or approved.

Section 7. Be it further enacted, if a development standard, not including permitted uses, is absent from the SP plan and/or Council approval, the property shall be subject to the standards, regulation and requirements of the RM6 zoning district as of the date of the applicable request or application. Uses are limited as described in the Council ordinance.

Section 8. The Metropolitan Clerk is directed to publish a notice announcing such change in a newspaper of general circulation within five days following final passage.

Section 9. This Ordinance shall take effect upon publication of above said notice announcing such change in a newspaper of general circulation,• the welfare of The Metropolitan Government of Nashville and Davidson County requiring it.

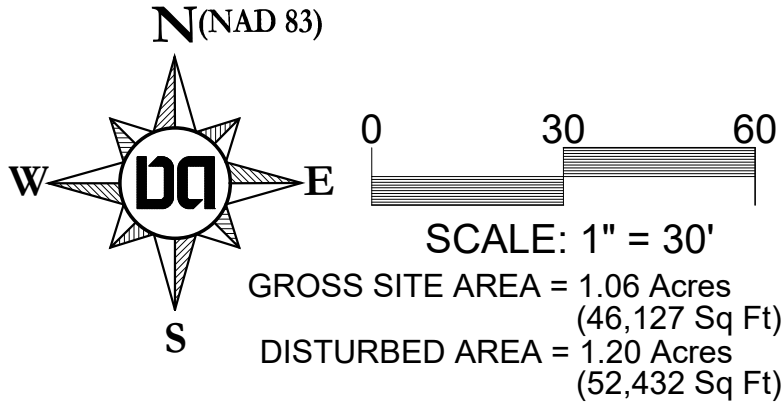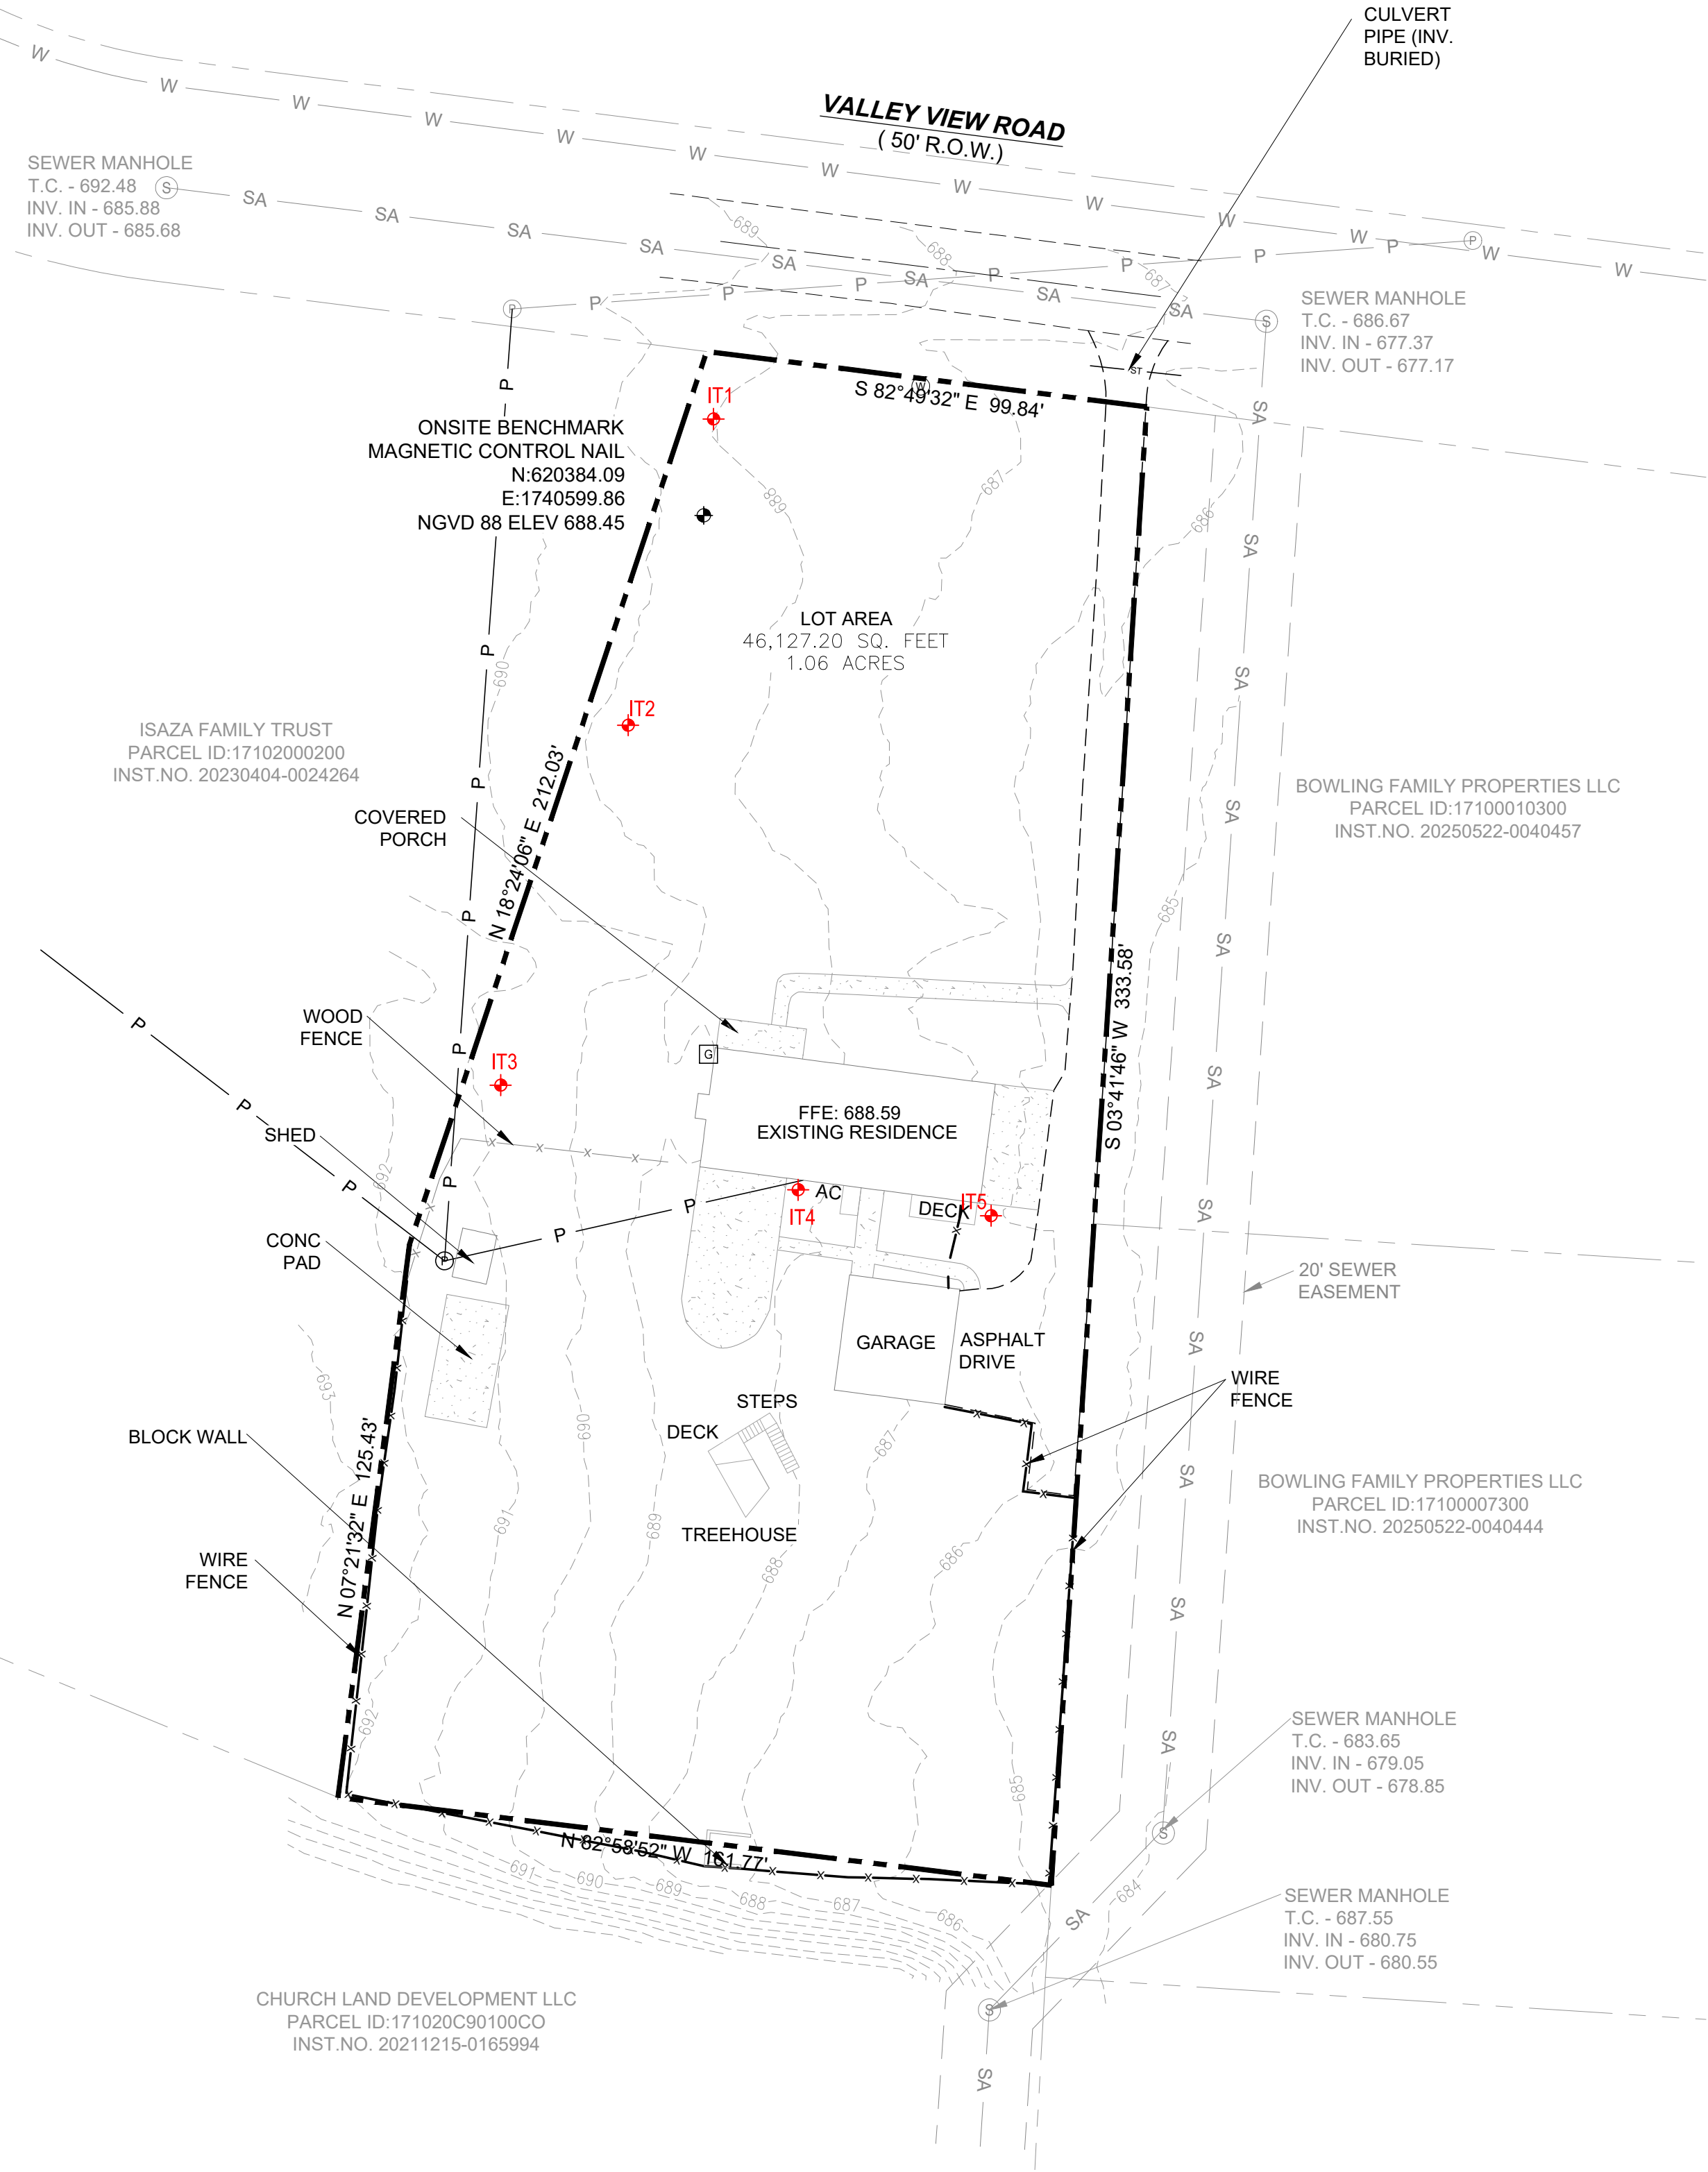


METRO WATER SERVICES - NASHVILLE, TN
APPROVED FOR CONSTRUCTION
THIS DOCUMENT HAS BEEN REVIEWED BY THE DEPARTMENT OF WATER AND SEWERAGE SERVICES OR CONTRACTED PROFESSIONAL AND IS HEREBY APPROVED FOR CONSTRUCTION. THIS APPROVAL SHALL NOT BE CONSTRUED AS AN ASSURANCE THAT THE IMPROVEMENTS DEPICTED IN THE DOCUMENT BEARING THIS STAMP WILL FUNCTION AS INTENDED.
SWGR: 2025095494 - REV01
Date: 03/19/2026
APPROVAL EXPIRES ONE YEAR FROM THE DATE ABOVE

Permits	
MPC Case No	2024SP-039-002
SWGR	2025095494
MWS (Sewer)	2025-----

Dale & Associates
Civil Engineering
Land Planning & Zoning
Surveying


Drawing Date:
August 2025
Revisions

Final SP
5655 Valley View
Parcel 74 on Tax Map 171
Brentwood, Davidson County, Tennessee

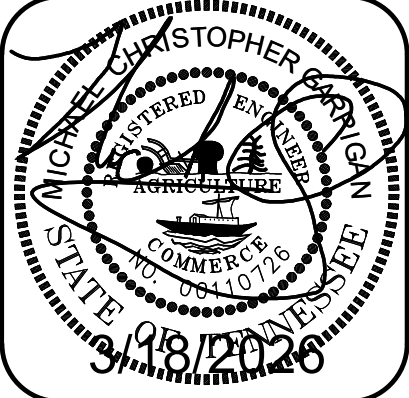


Existing
Conditions Plan

D&A Project #25095
Brentwood Chase 3
5655 Valley View
C0.1

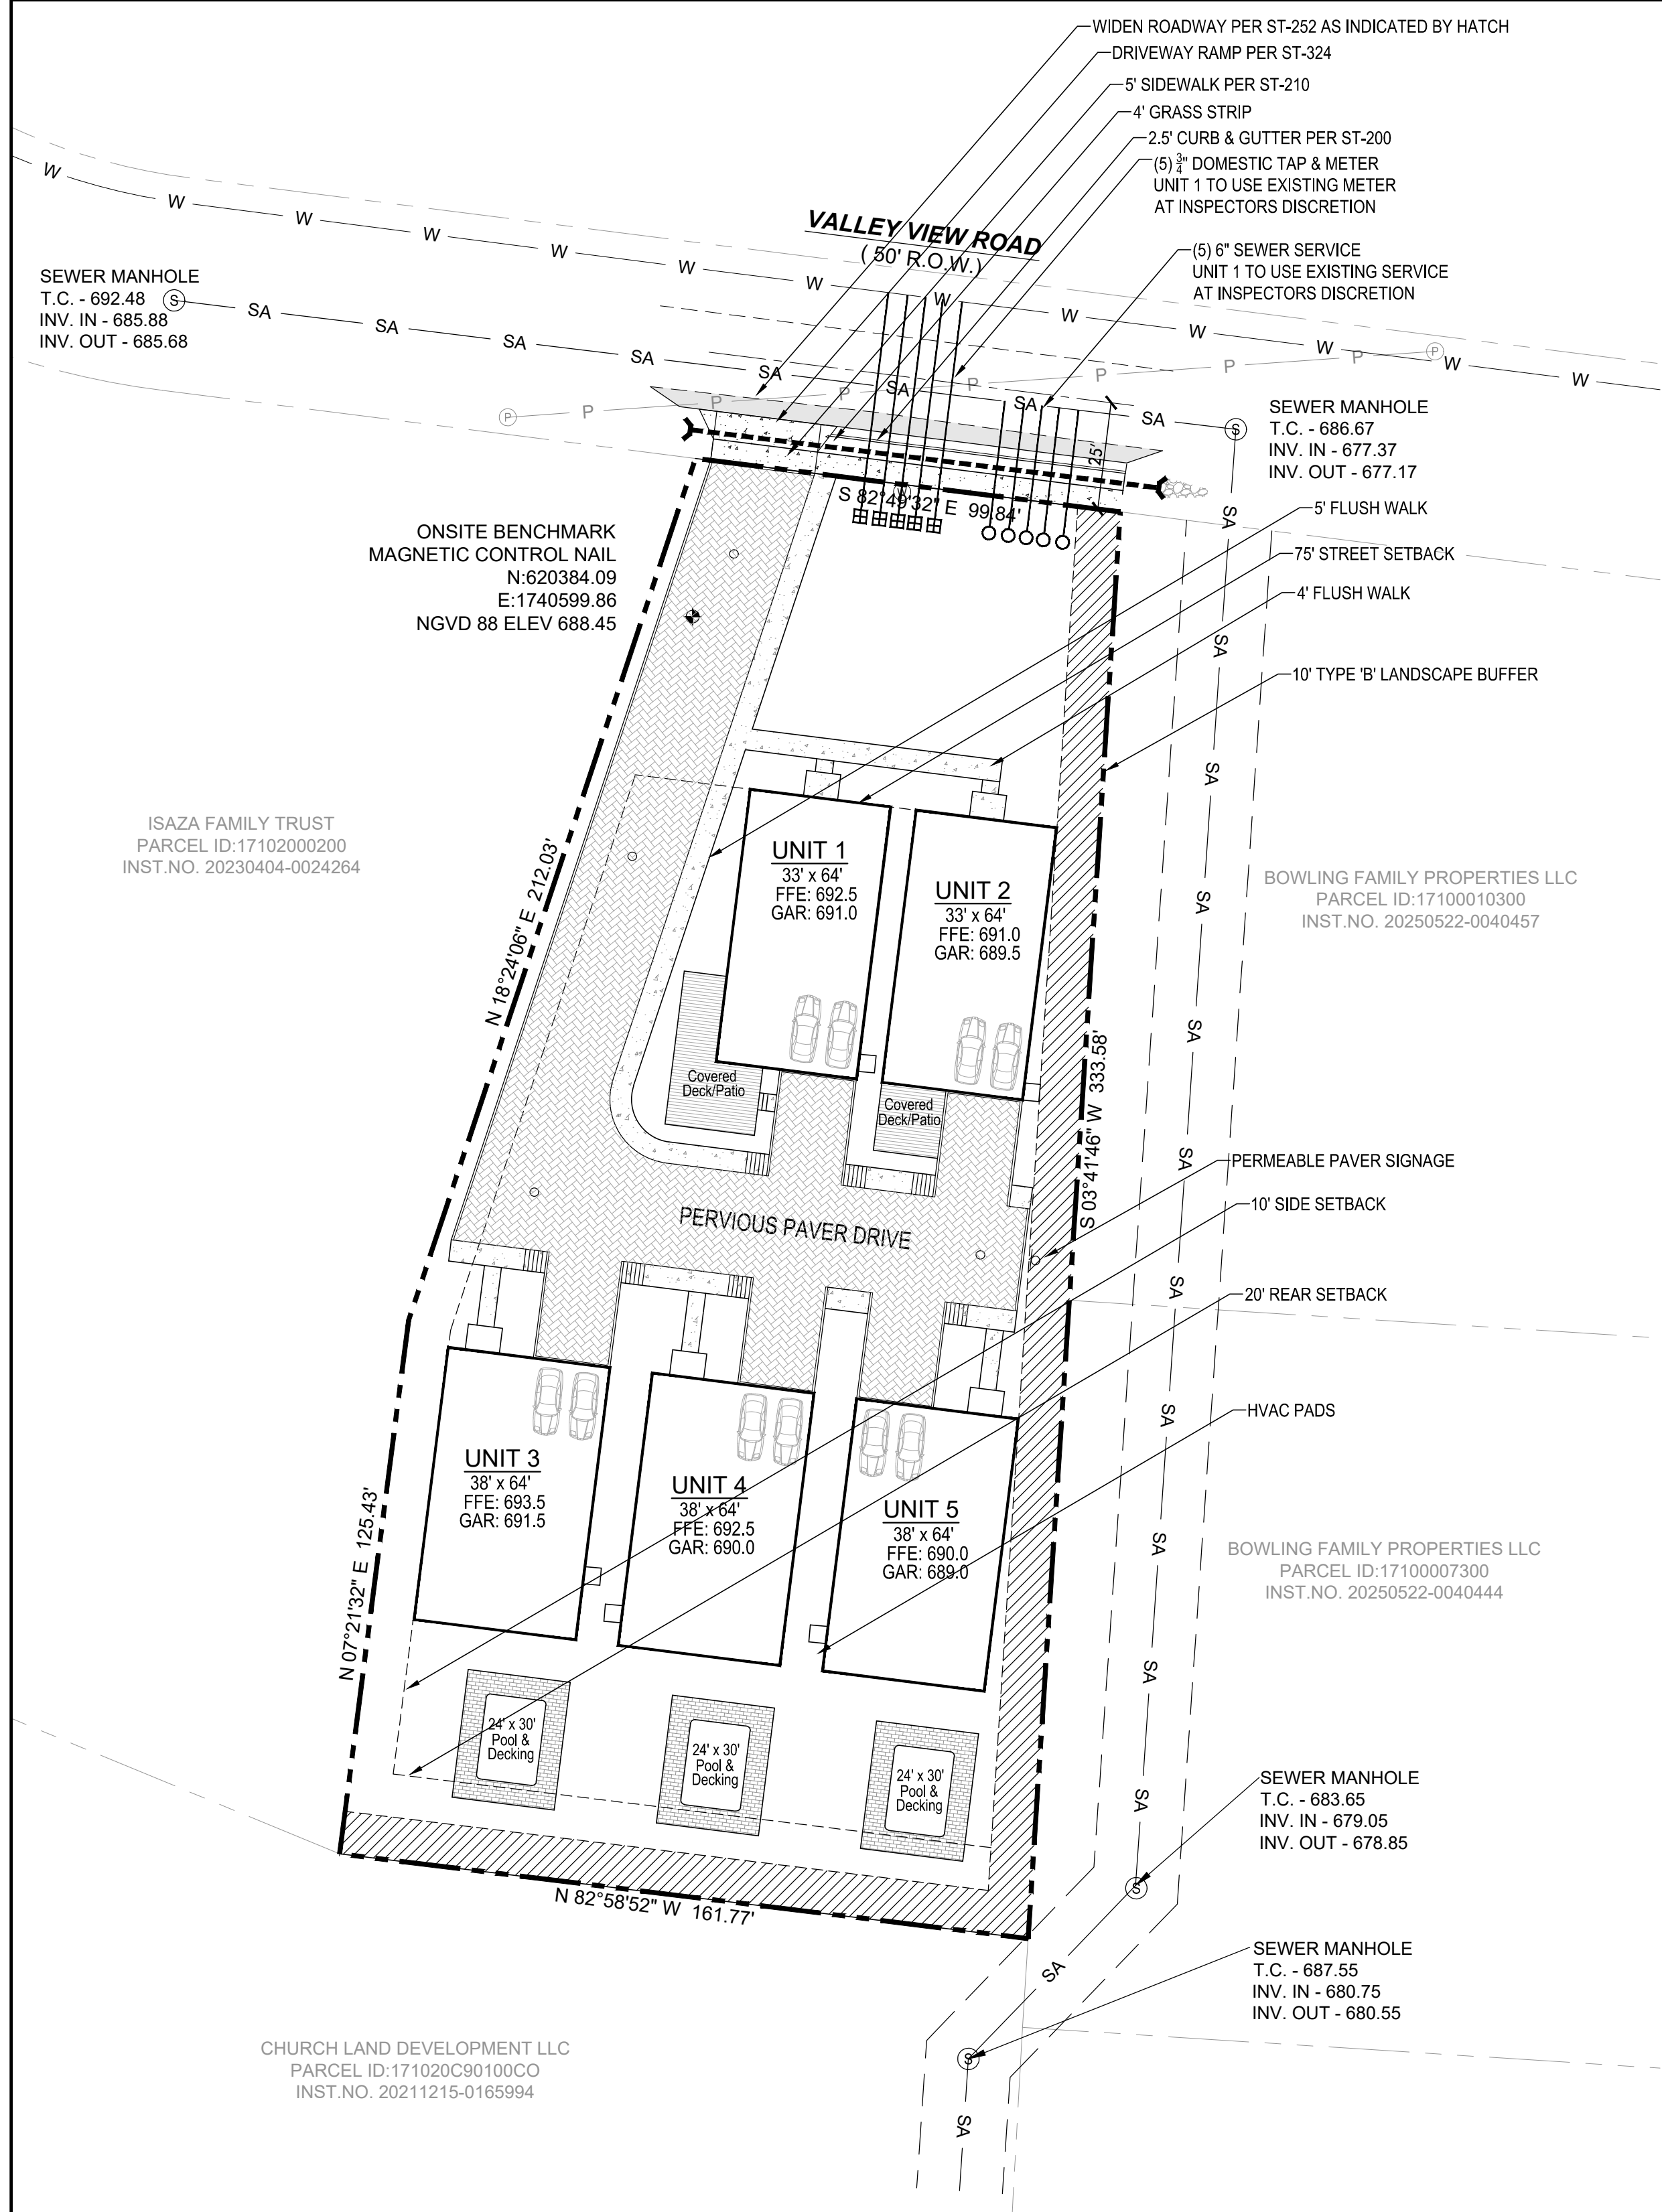


MWS Standard Private Utility Plan Notes


- All water and sewer construction shall be in accordance with specifications and standard details of the metro Water Services.
- All connections to existing manholes shall be by coring and resilient connector method.
- Vertical Double Check Valve Assemblies, that are located in interior rooms, can only be used for fire services.
- All water meters shall be a minimum of 24" not to exceed a maximum of 28" below finished grade.
- Irrigation line shall be copper from the meter to the backflow preventer.
- The minimum fees outlined in the capacity letter must be paid before commercial construction plans can be reviewed.
- All sewer services shall be minimum 6 inches in diameter, from connection at the main until the fires clean out assembly.
- Backflow device to remain accessible at all times.
- Plan size shall be 24" x 36" and shall show contours around meter boxes.
- Any unused existing water meters must be cut and capped at the public main.
- All lead or galvanized water service lines encountered with the project shall be reinstated with copper of like size from the water main to the meter box.
- Domestic and irrigation water meters and associated appurtenances shall be placed in or under a paved or improved surface other than the portion of the service located within the right of way.
- Sanitary sewer taps shall be placed at the lowest adjacent sewer main elevation for each premises and shall not be located in or under a paved or improved surface other than the portion within the right of way.

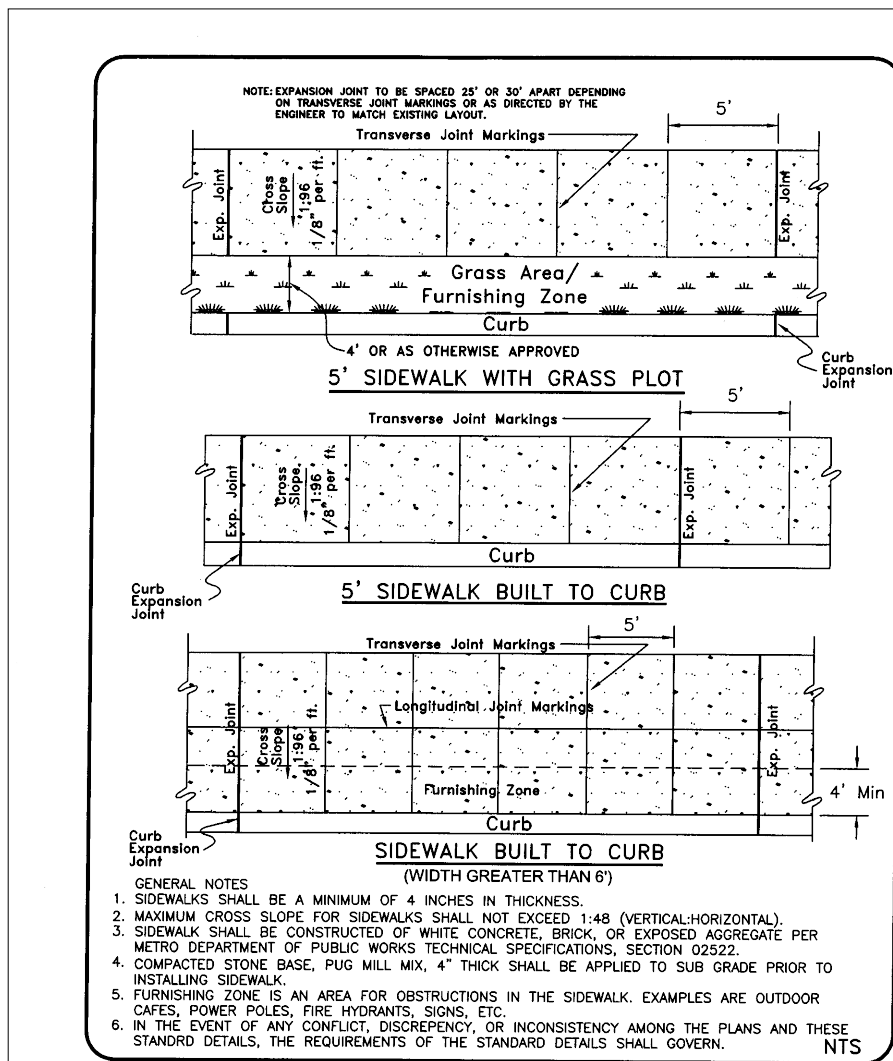


METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS	SIDEWALK CONSTRUCTION	DWG. NO. ST-210
DIR. OF ENG.: <i>Mark May</i>	DATE: 1/15/04	REVISED: 05/02/03 11/24/03 06/23/04

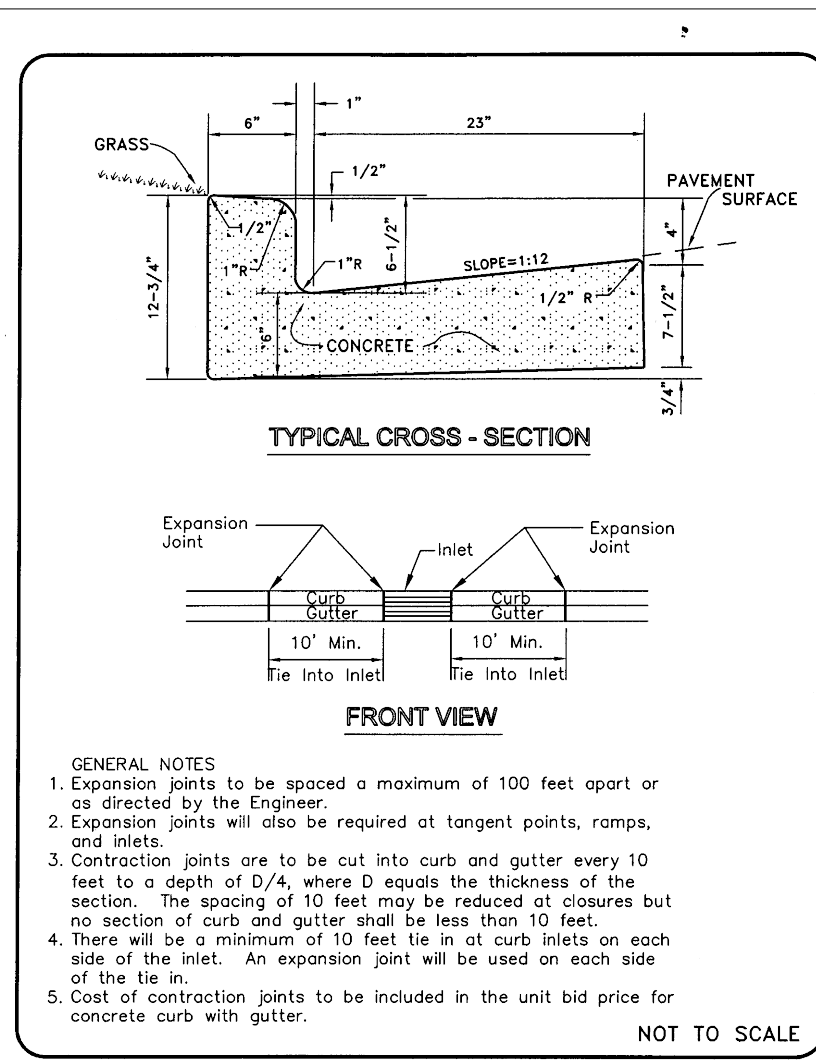


METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS	STANDARD CURB WITH GUTTER	DWG. NO. ST-200
DIR. OF ENG.: <i>Mark May</i>	DATE: 5/12/03	REVISED: 07/27/00 05/02/03

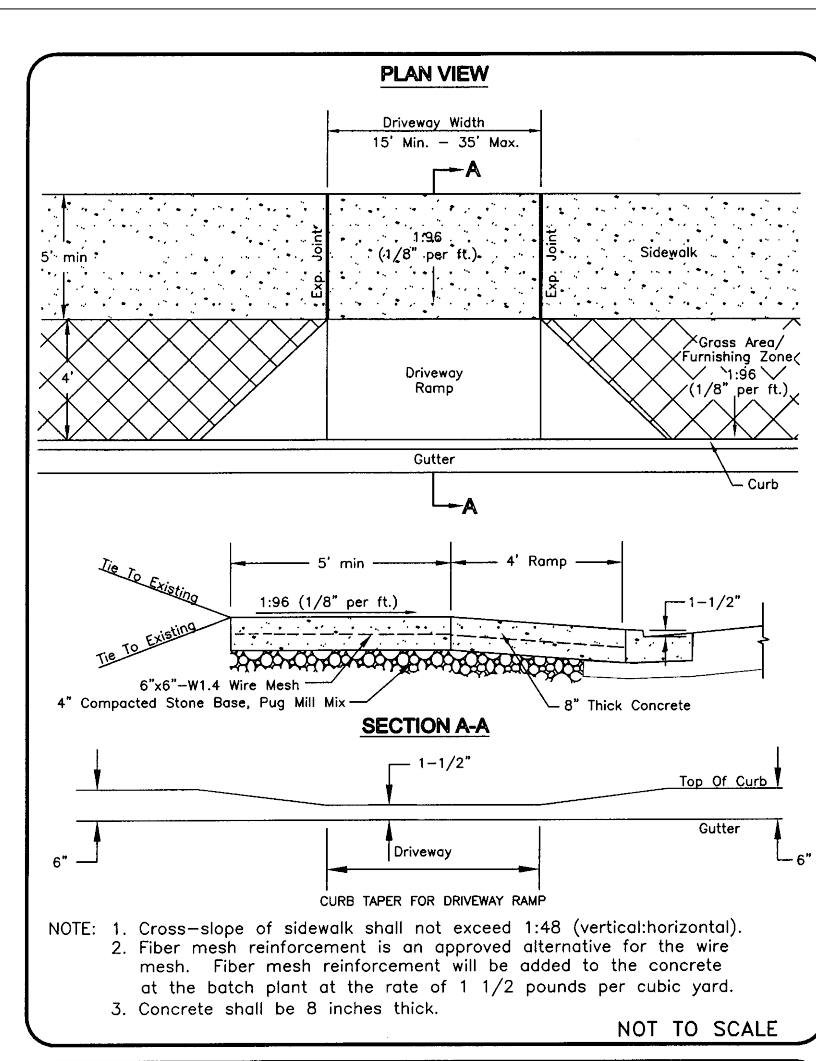

METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS	NEW CONSTRUCTION COMMERCIAL DRIVEWAY RAMP	DWG. NO. ST-324
DIR. OF ENG.: <i>Mark May</i>	DATE: 5/12/03	REVISED: 07/27/00 05/02/03

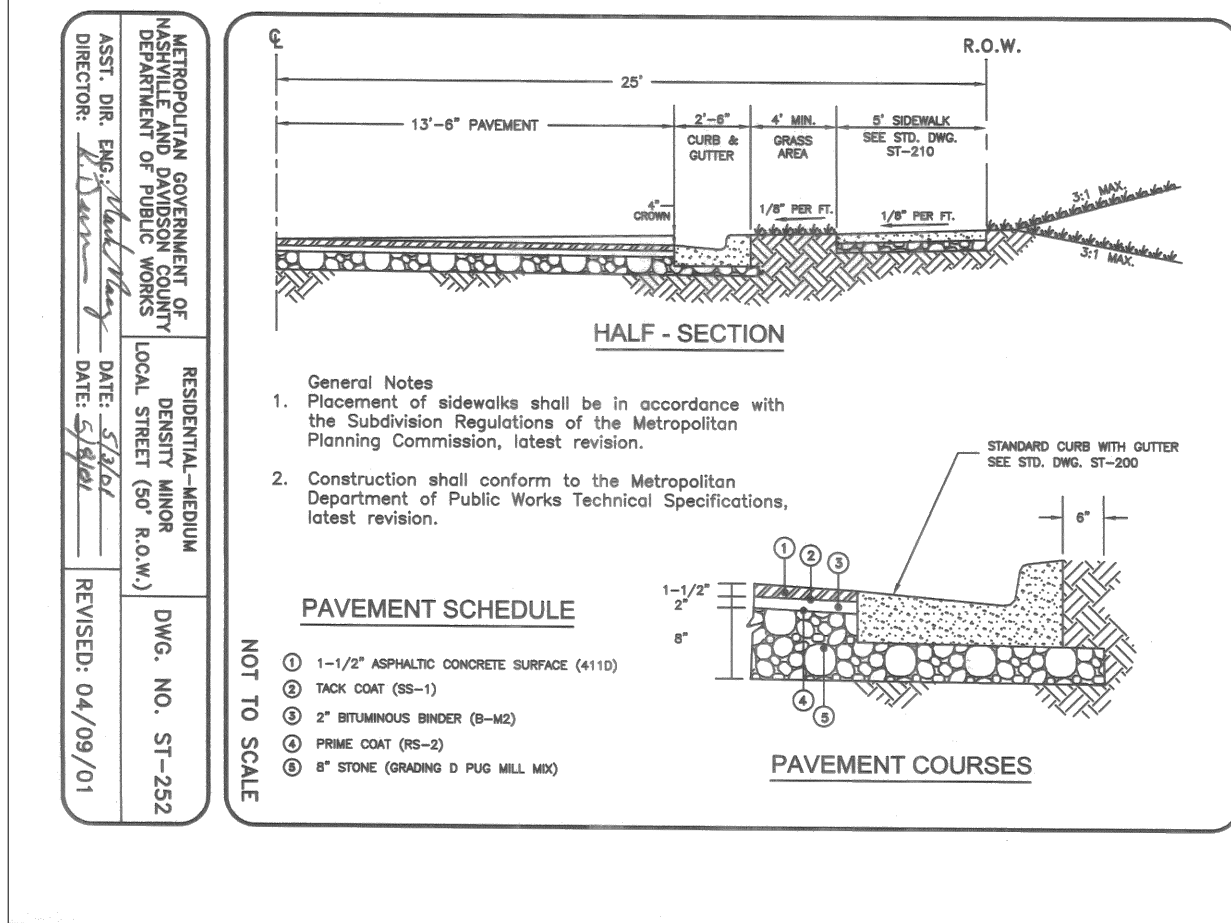


METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS	PERVIOUS PAVEMENT DRIVE	DWG. NO. ST-322
DIR. OF ENG.: <i>Mark May</i>	DATE: 5/12/03	REVISED: 04/09/01

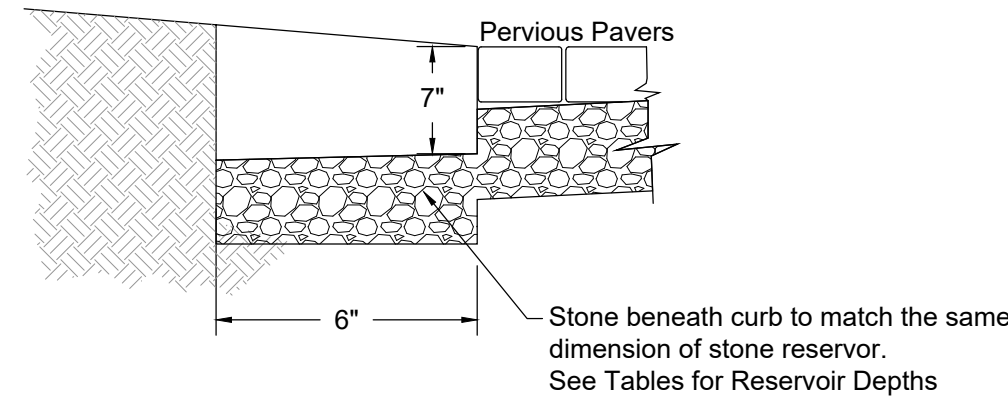

- General Notes:
- Expansion joints to be spaced a max. of 100' apart or as directed by engineer.
 - Expansion joints will also be required at tangent points, ramps, and inlets.
 - Contraction joints are to be cut into curb and gutter every 10' to a depth of D/4, where D equals the thickness of the section. The spacing of 10' may be reduced at curves but no section of curb shall be less than 10'.

RIBBON CURB DETAIL
N.T.S.

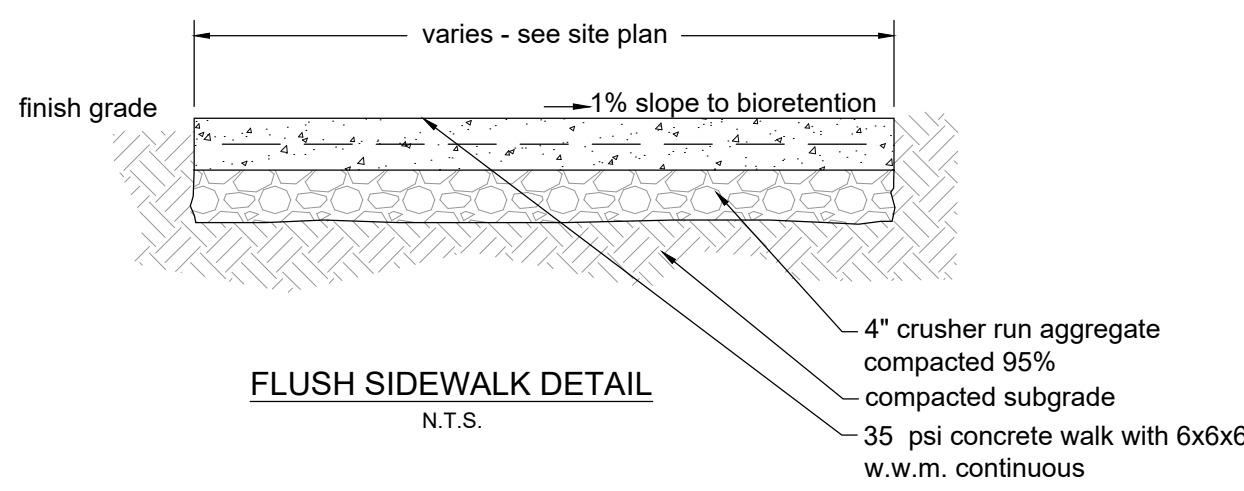


FLUSH SIDEWALK DETAIL
N.T.S.

Solid Waste Notes

Trash & Recycling Pick up to be provided by private hauler.

Individual Roll-away cans shall be utilized for pick up.

Contract with private hauler shall be provided prior to Building Permit issuance.

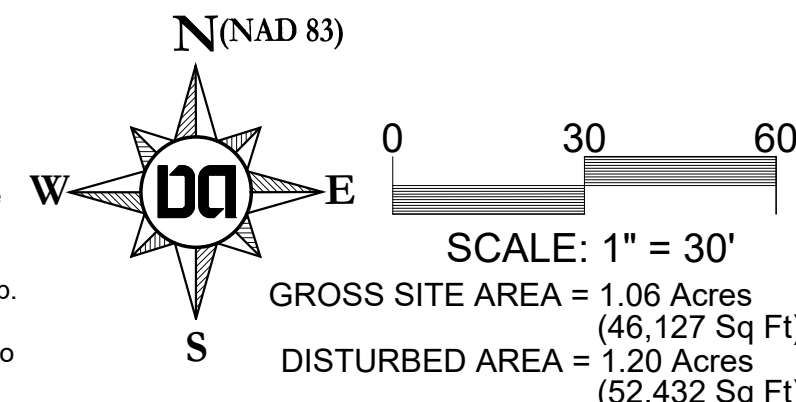

SCALE: 1" = 30'

GROSS SITE AREA = 1.06 Acres
(46,127 Sq Ft)

DISTURBED AREA = 1.20 Acres
(52,432 Sq Ft)

METRO WATER SERVICES - NASHVILLE, TN

APPROVED FOR CONSTRUCTION

THIS DOCUMENT HAS BEEN REVIEWED BY THE DEPARTMENT OF WATER AND SEWERAGE SERVICES OR CONTRACTED PROFESSIONAL AND IS HEREBY APPROVED FOR CONSTRUCTION. THIS APPROVAL SHALL NOT BE CONSTRUED AS AN ASSURANCE THAT THE IMPROVEMENTS DEPICTED IN THE DOCUMENT BEARING THIS STAMP WILL FUNCTION AS INTENDED.

SWGR: 2025095494 - REV01
Date: 03/19/2026

APPROVAL EXPIRES ONE YEAR FROM THE DATE ABOVE

Permits	
MPC Case No	2024SP-039-002
SWGR	2025095494
MWS (Sewer)	2025-.....

Dale & Associates

Civil Engineering
Land Planning & Zoning
Surveying

516 Heather Place
Nashville, TN 37204
(615) 297-1166

D&A Project #25095
Brentwood Chase 3
5655 Valley View

C1.0

Drawing Date:
August 2025


Revisions

Final SP




5655 Valley View

Parcel 74 on Tax Map 171

Brentwood, Davidson County, Tennessee

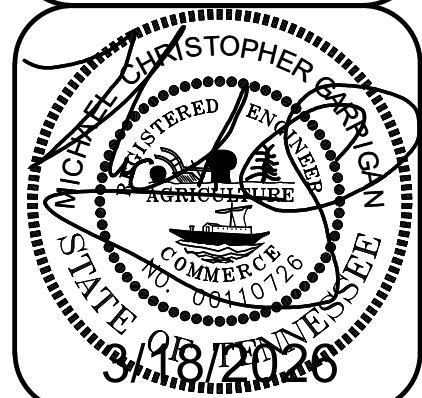

Site Layout &
Utility Plan

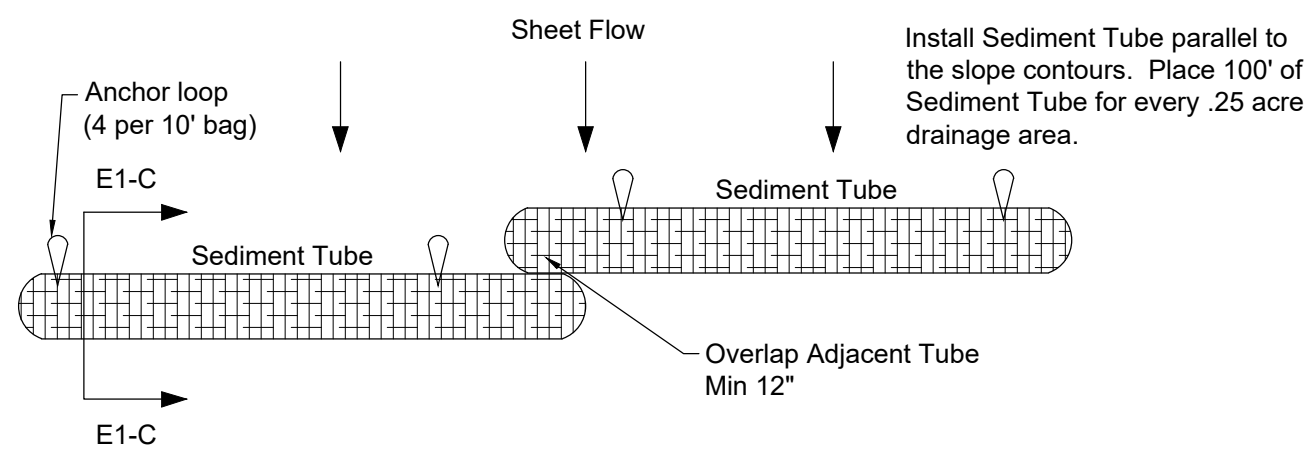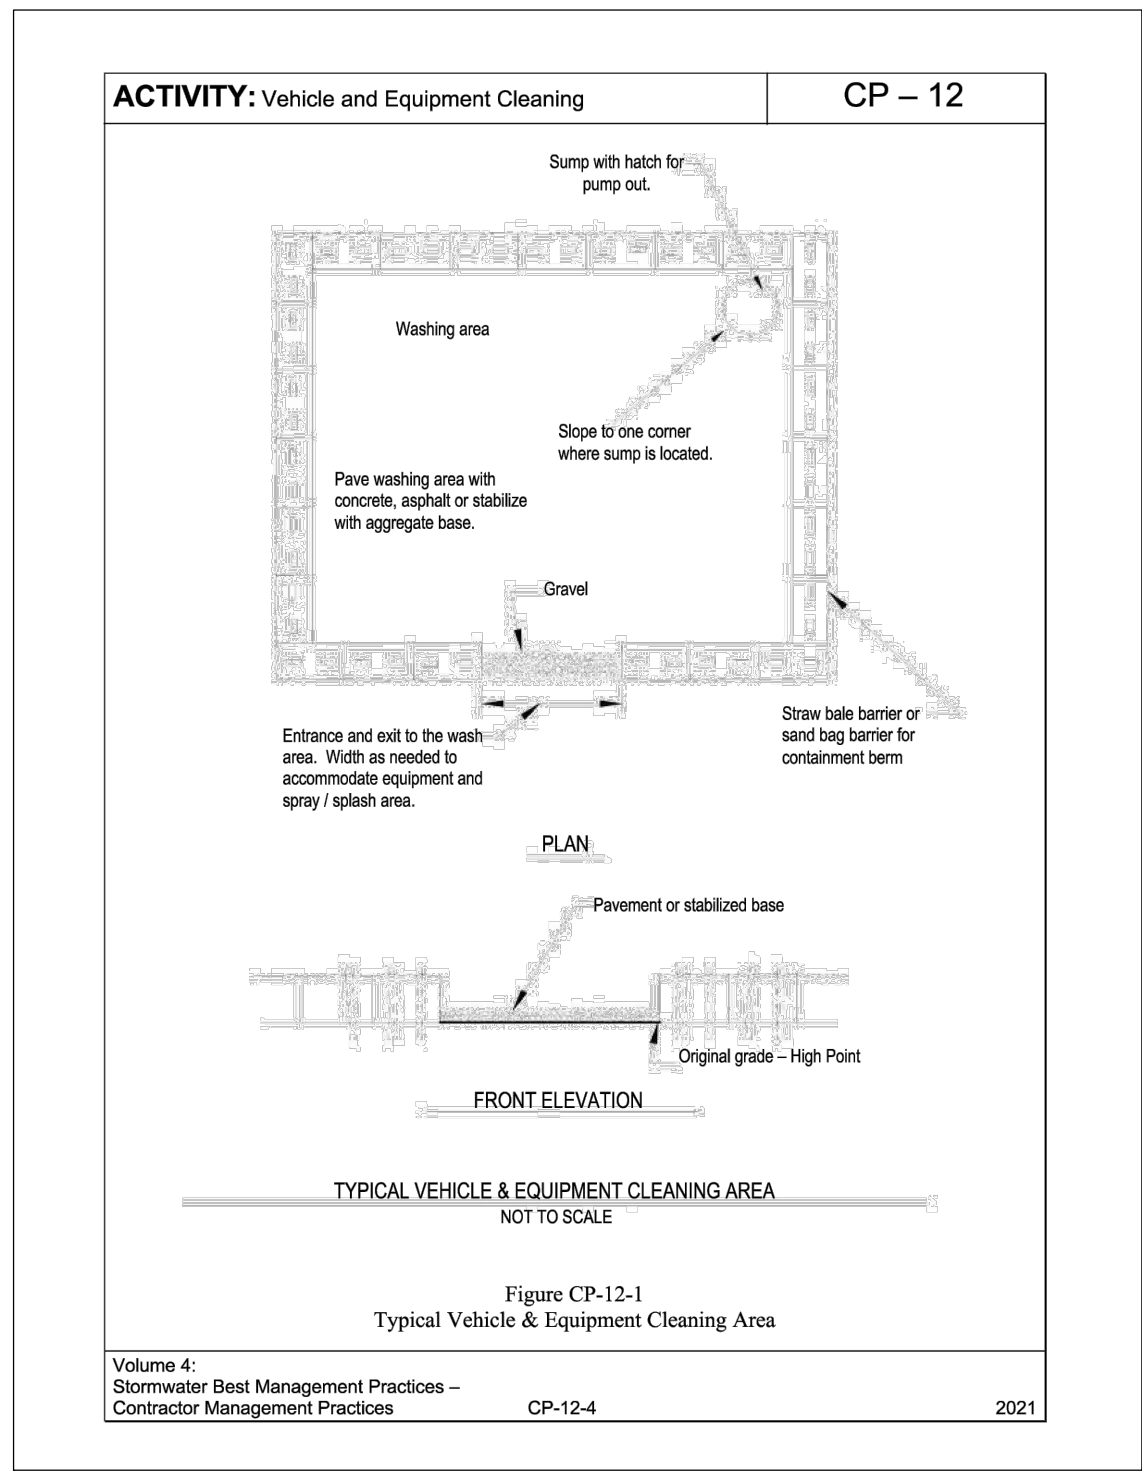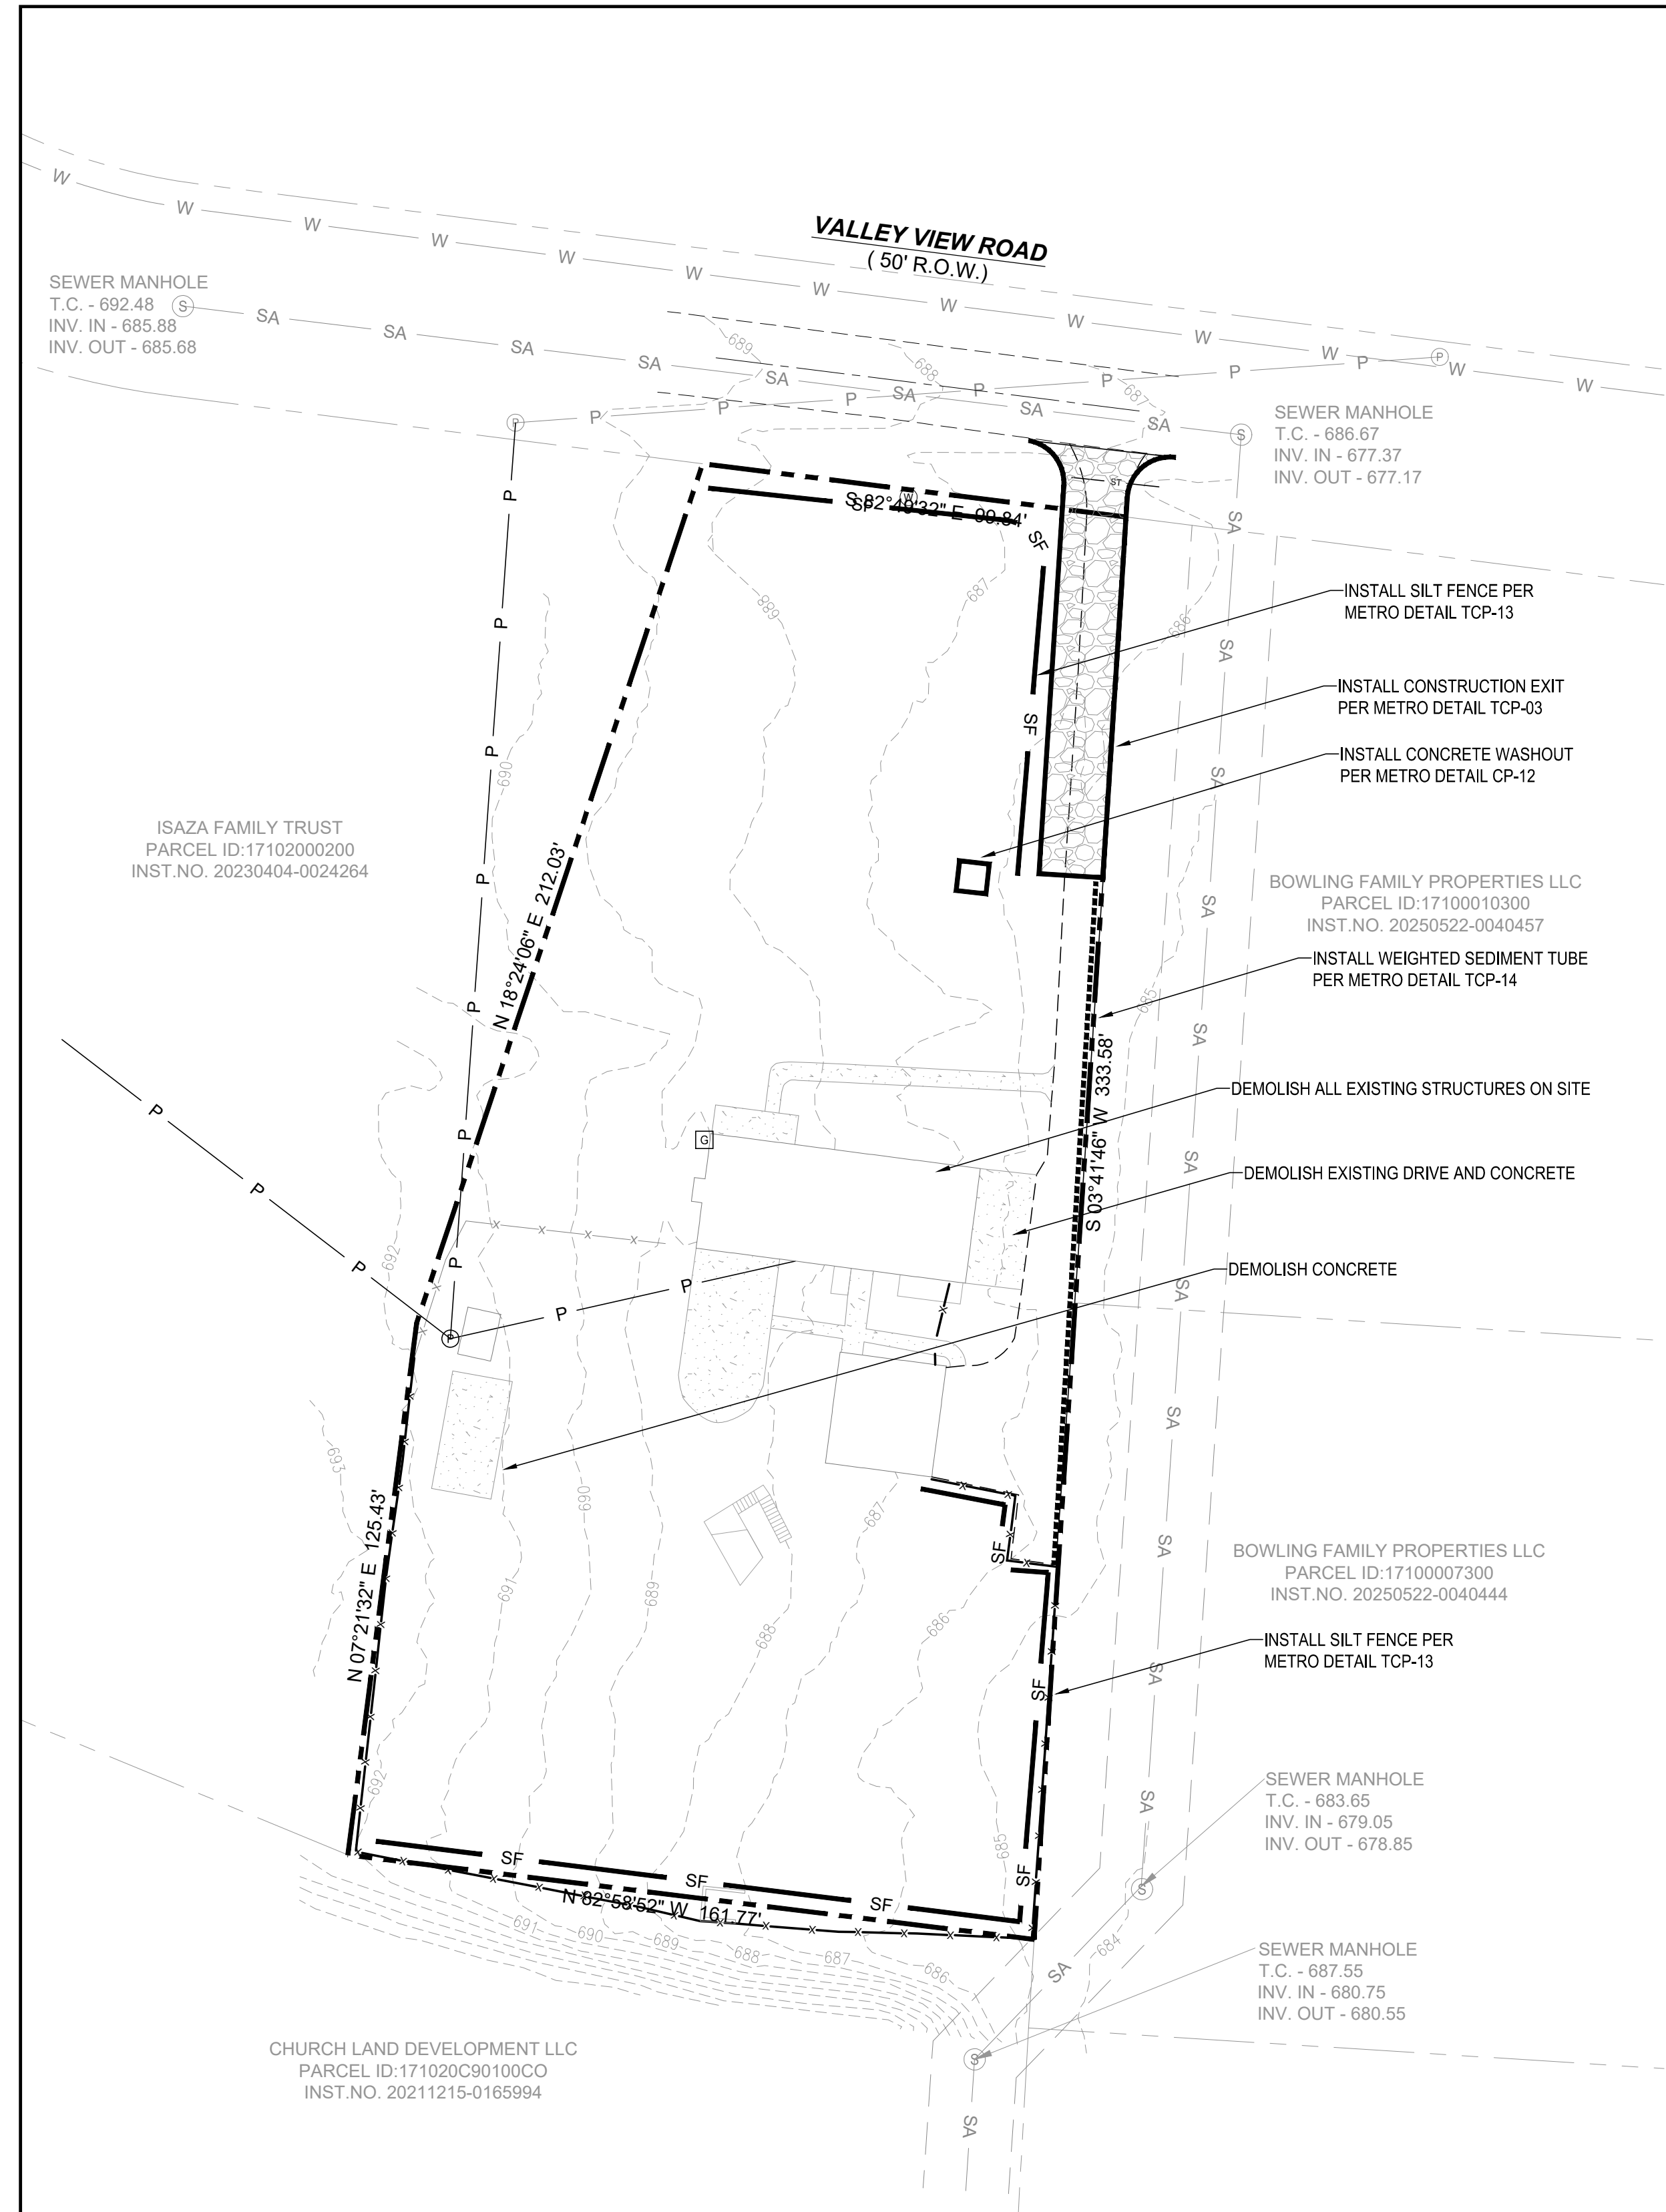

WEIGHTED SEDIMENT TUBE DETAIL

REFER TO METRO DETAIL TCP-14

N.T.S.

Sediment Tube General Notes:

- Weighted sediment tubes have not been as effective due to improper use. These barriers have been placed in swales and drainageways where runoff volumes and velocities have caused the tubes to wash out. In addition, failure to stake the sediment tube will allow undercutting and end flow.
- Weighted sediment tubes are not to be used for extended periods of time because they tend to rot and fall apart.
- Limit length of any single row of tubes to 500 ft. (157 m).
- Not appropriate for large drainage areas, limit to five acres or less.
- Sediment tubes may lose their effectiveness due to degradation, thus constant maintenance is required.
- Not intended for inlet protection or streams.
- Tube bindings of jute or cotton not recommended as they quickly deteriorate and fail.
- Limit to locations suitable for temporary ponding or deposition of sediment.
- Slopes of 3:1 (H:V) or flatter are preferred. If the slope exceeds 3:1 (H:V), use a different management practice or limit the length of slope upstream of the tube to less than 25 ft (15.7 m).

Sediment Tube Maintenance Notes:



- Inspect weekly and within 24 hours after the end of a storm event.
- Replace tubes that have decomposed.
- Repair washouts or other damage as needed.
- Remove sediment when accumulations reach one-half the original height of either a single tube or stacked tubes. Sediments removed shall be disposed of properly.
- Remove tubes when no longer needed. Re-grade and stabilize the area.
- Inspect weighted sediment tubes when rain is forecast. Be sure the tubes are overlapped or butted end to end.

The Project associated with these submitted plans is covered under Tennessee Construction General Permit TNR 248714. The Total Disturbed Area is 1.20 acres.

Check all that apply: This site discharges into waters identified by TDEC as:
☒ Impaired for siltation ☐ Impaired for habitat alteration
☐ Exceptional

Engineer [Signature] 10/17/2025 Date


I, [Signature], as the "Certified" Erosion Control Specialist for this Site, have Reviewed and Approved the Erosion Prevention and Sediment Control BMP's of these Plans on 10/17/2025

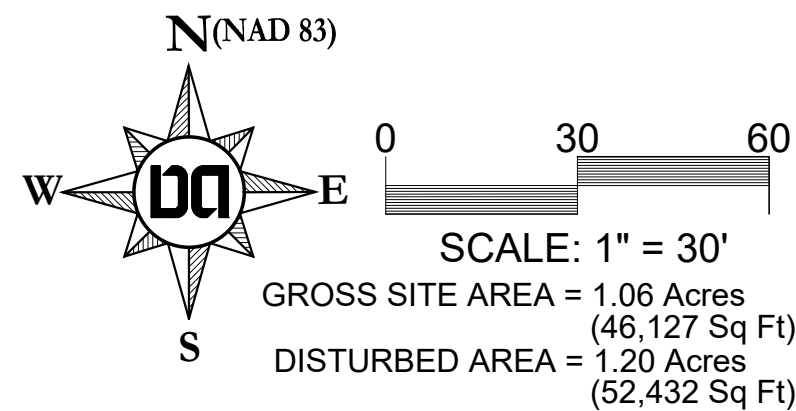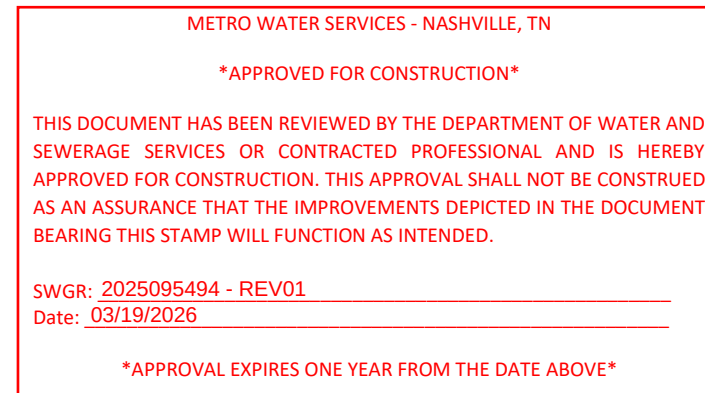

EPSC NOTES

- ALL PERIMETER EPSC MEASURES MUST BE IN PLACE PRIOR TO GRADING.
- ANY DISTURBED AREA LEFT EXPOSED FOR A PREIOD GREATER THAN 7 DAYS WITH SLOPES GREATER THAN OR EQUAL TO 3:1 SHALL BE STABILIZED WITH MULCH OR TEMPORARY SEEDING.
- ALL SLOPES 3:1 OR GREATER AND CHANNEL SIDE SLOPES TO RECEIVE EROSION CONTROL MATTING.
- CONTRACTOR SHALL PROVIDE AN AREA FOR CONCRETE WASH DOWN AND EQUIPMENT FUEL/OIL IN ACCORDANCE WITH METRO CP-10 AND CP-13 RESPECTIVELY. CONTRACTOR TO COORDINATE EXACT LOCATION WITH NPDES DEPARTMENT DURING PRE-CONSTRUCTION MEETING. CONTROL OF OTHER SITE WASTES SUCH AS DISCARDED BUILDING MATERIALS, CHEMICALS, LITTER AND SANITARY WASTES THAT MAY CAUSE ADVERSE IMPACTS TO WATER QUALITY ARE ALSO REQUIRED BY THE GRADING PERMITTEE.


Permits	
MPC Case No	2024SP-039-002
SWGR	2025095494
MWS (Sewer)	2025-.....

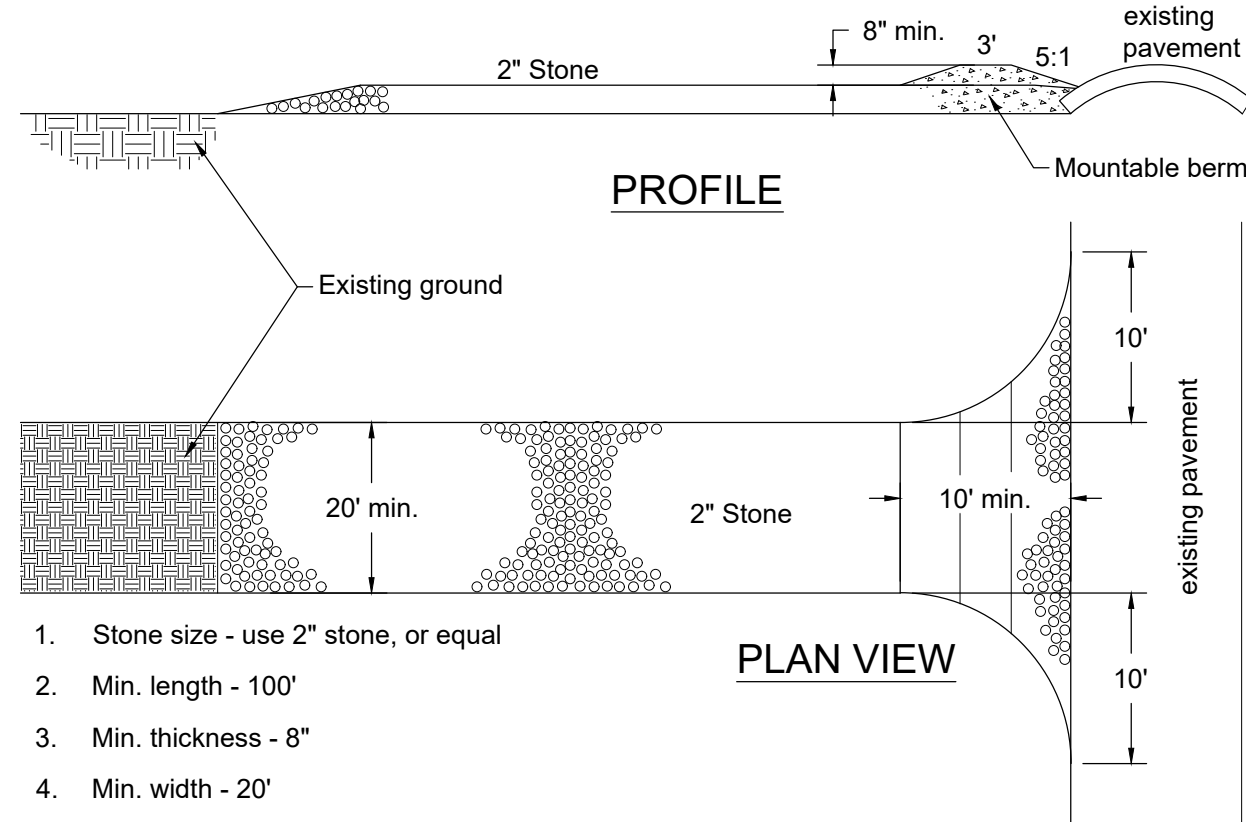

- Stone size - use 2" stone, or equal
- Min. length - 100'
- Min. thickness - 8"
- Min. width - 20'
- Filter cloth will be placed over the entire area prior to placing of stone.
- Surface water all surface water flowing or diverted toward construction entrances shall be piped across the entrance.
- Maintenance - the entrance shall be maintained in a condition which will prevent tracking or flowing of sediment onto public rights-of-way. This may require periodic top dressing with additional stone as conditions demand, and repair and/or clean out of any measures used to trap sediment. All sediment spilled, dropped, washed or tracked onto public rights-of-way must be removed immediately.

TEMPORARY CONSTRUCTION EXIT TCP-03

N.T.S.

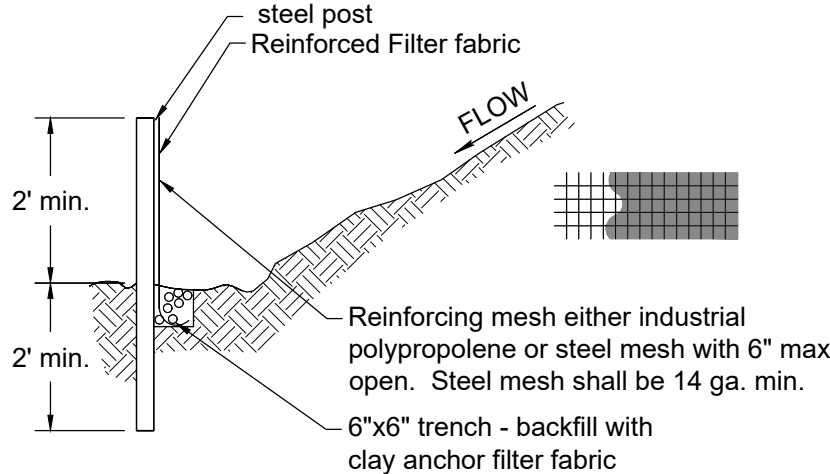

Silt Fence Maintenance Notes:

- Inspect weekly and after each rainfall.
- Repair wherever fence is damaged.
- Remove sediment when it reaches 1/3 the height of the fence.
- Inspect silt fence when rain is forecast. Perform required maintenance before the storm event.
- Remove silt fence when no longer needed. Fill and compact past holes and anchor trench remove sediment accumulation, and grade alignment to blend with adjacent ground.

Silt Fence Notes:

- Filter fabric fence to be placed prior to start of rough grading.
- Steel posts shall be approved by owner prior to use.
- Wood posts shall be 2"x 2" min., oak or similar hardwood.
- Posts shall be spaced at 6' intervals.
- Filter fabric shall be securely bound to posts with either staples or wire ties.
- Filter fabric shall be polypropylene fabric by Corps of Engineers guide spec. CW 02215. With equivalent opening size (eos) of no.100 sieve min., no.40 sieve max., as determined.
- J-Hooks to be used when silt fence is not installed along a contour.

WIRE BACK SILT FENCE DETAIL (TCP-13)

N.T.S.

Drawing Date:
August 2025


Revisions

Final SP

5655 Valley View

Parcel 74 on Tax Map 171

Brentwood, Davidson County, Tennessee

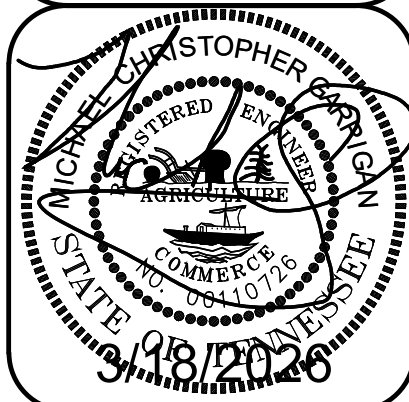

Demolition &
Initial Erosion
Control Plan


Dale & Associates

Civil Engineering
Land Planning & Zoning
Surveying

516 Heather Place
Nashville, TN 37204
(615) 297-5166

D&A Project #25095
Brentwood Chase 3
5655 Valley View






C2.0

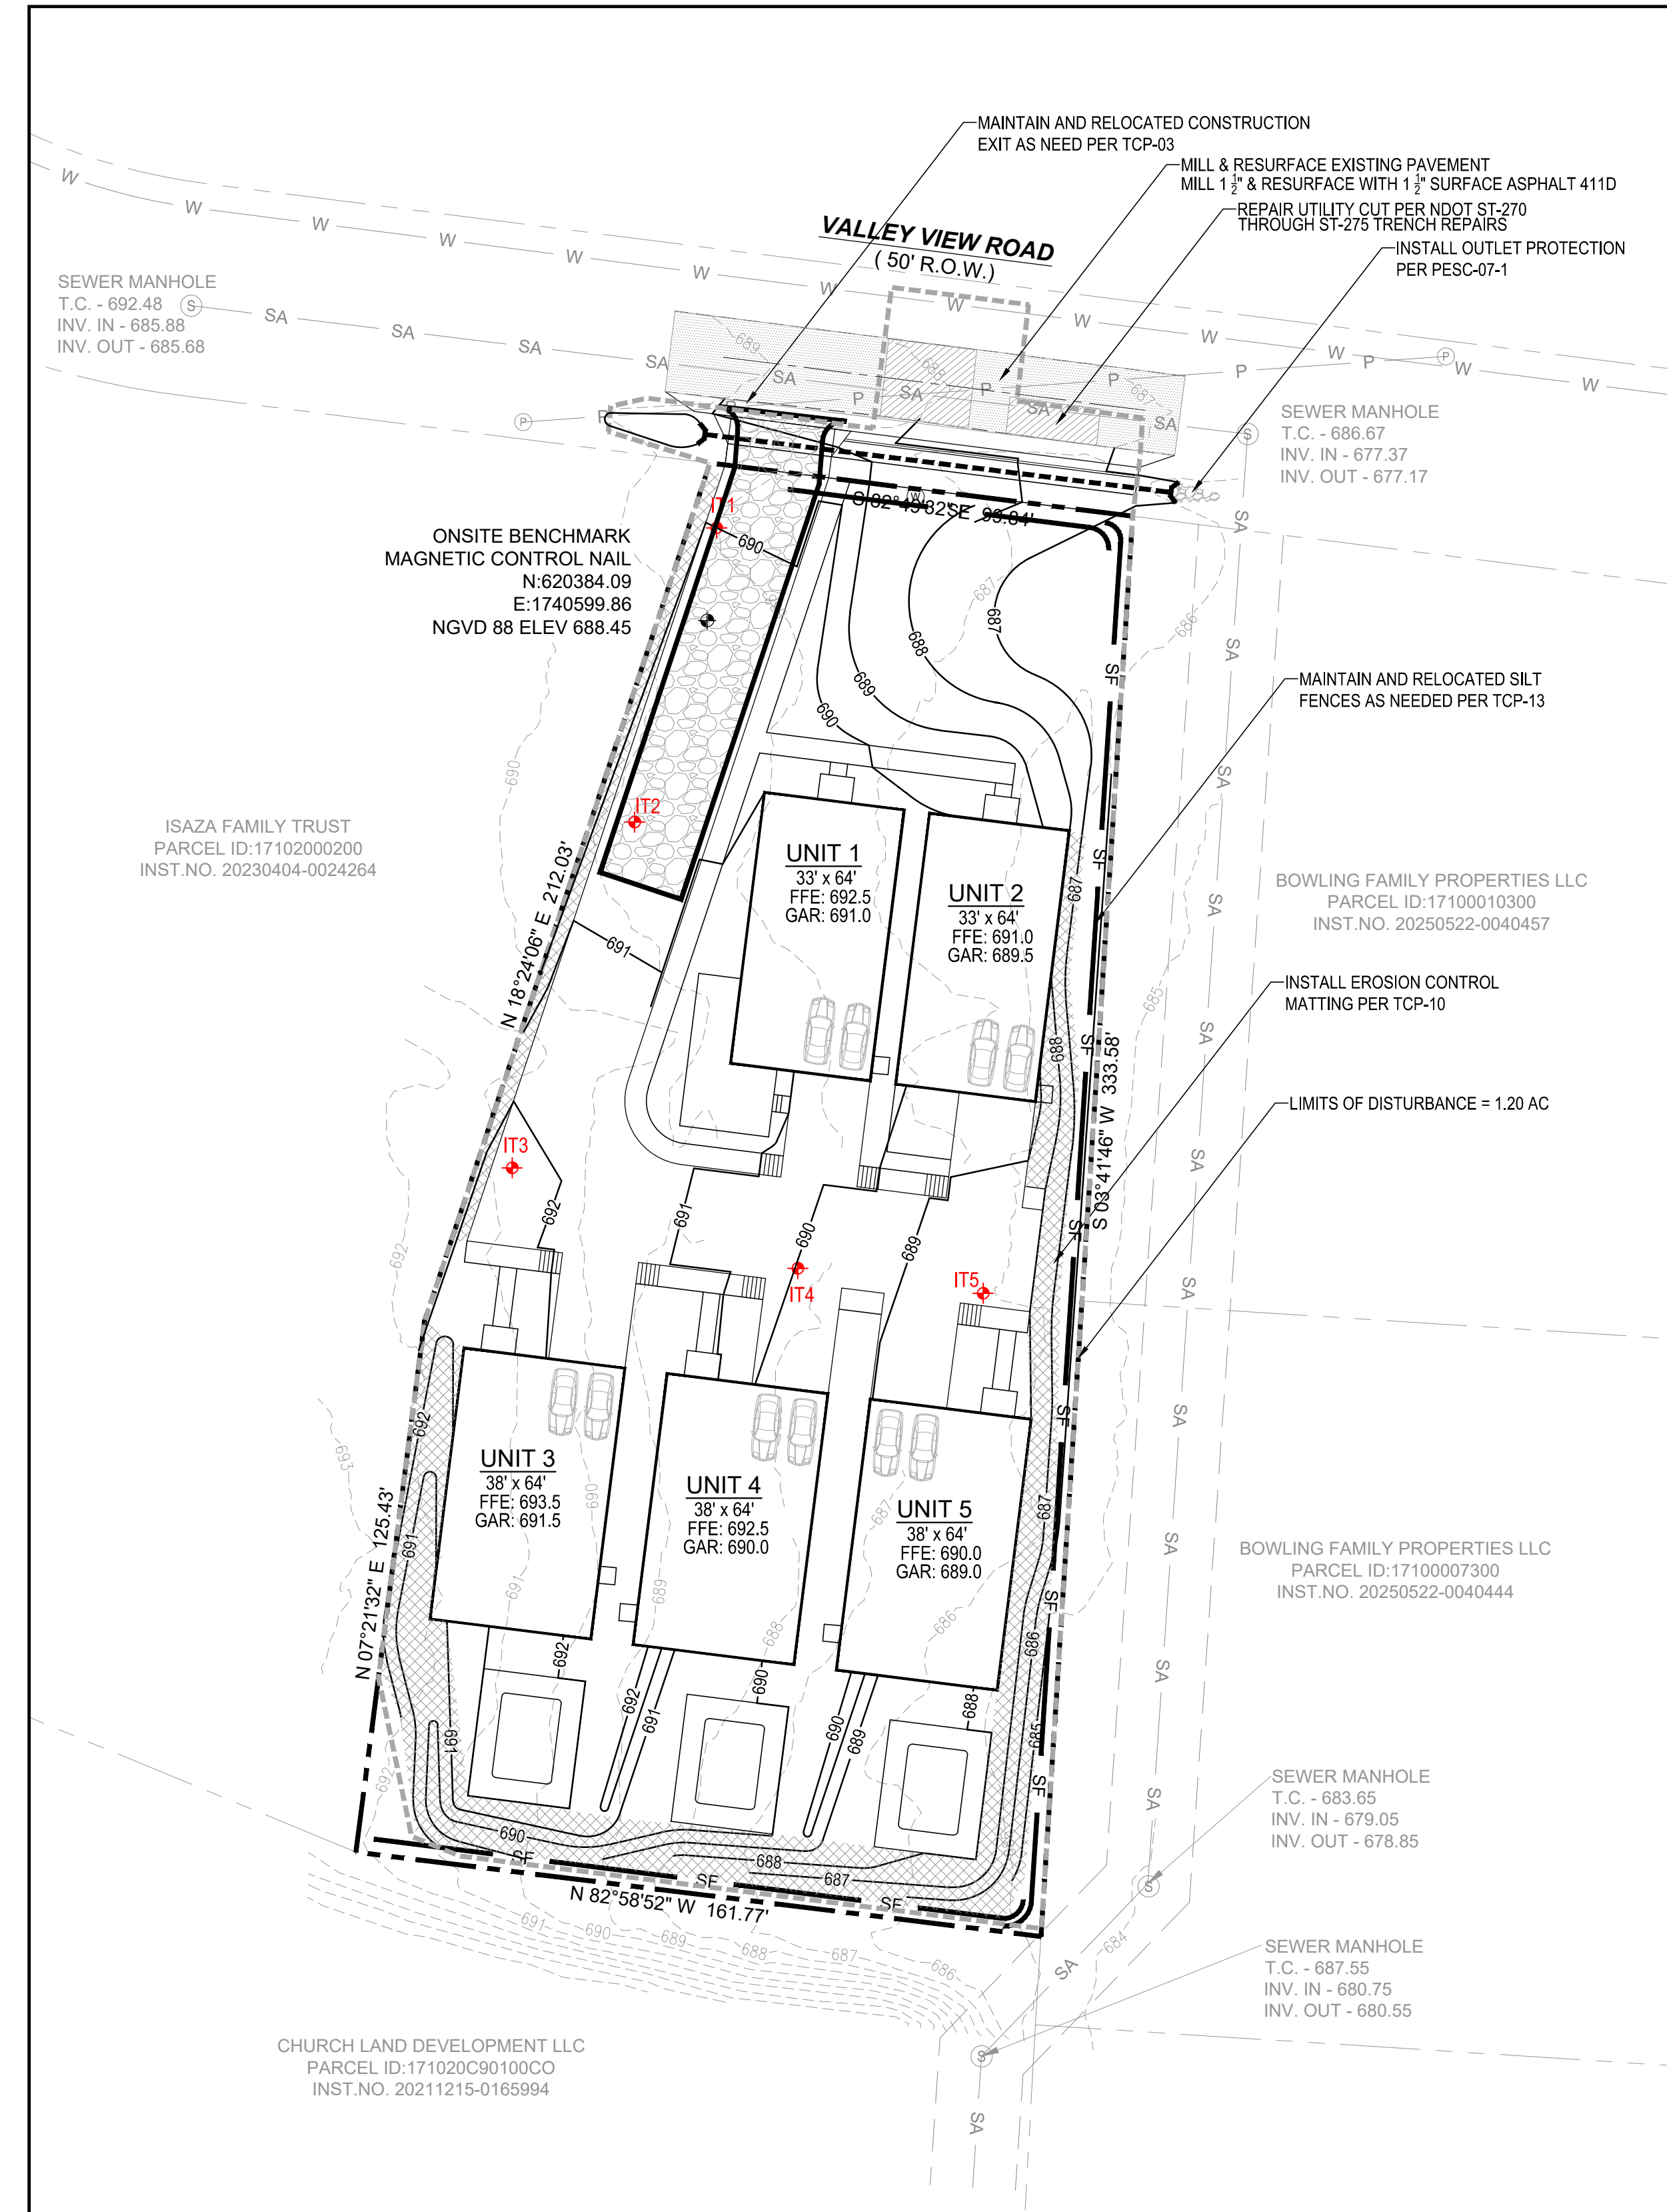

Infiltration Results

Test Performed Perry & Associates in May 2025

Location #	Refusal Depth (feet)	Test Depth (feet)	Average Drop Rate (inches/hour)	Approximate Existing Grade	Approximate Bedrock Elevation	GIP Subgrade Elevation	Proposed Separation
IT-1	2.5	2	1.8	688.0	685.5	687.5	2.0'
IT-2	2.5	2.0	1.95	688.5	686.0	688.5	2.5'
IT-3	3.0	2.5	1.1	690.5	687.5	689.5	2.0'
IT-4	2.5	2.0	2.7	688.0	685.5	687.5	2.0'
IT-5	2.0	-----	-----	686.0	684.0	686.0	2.0'

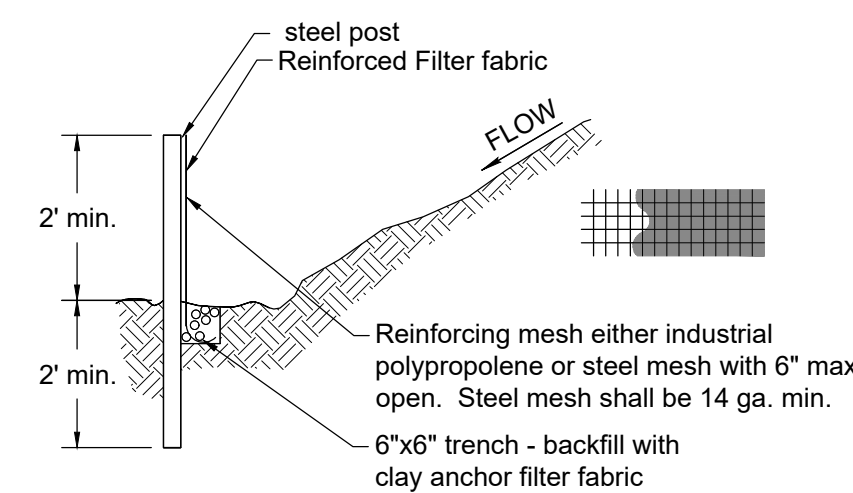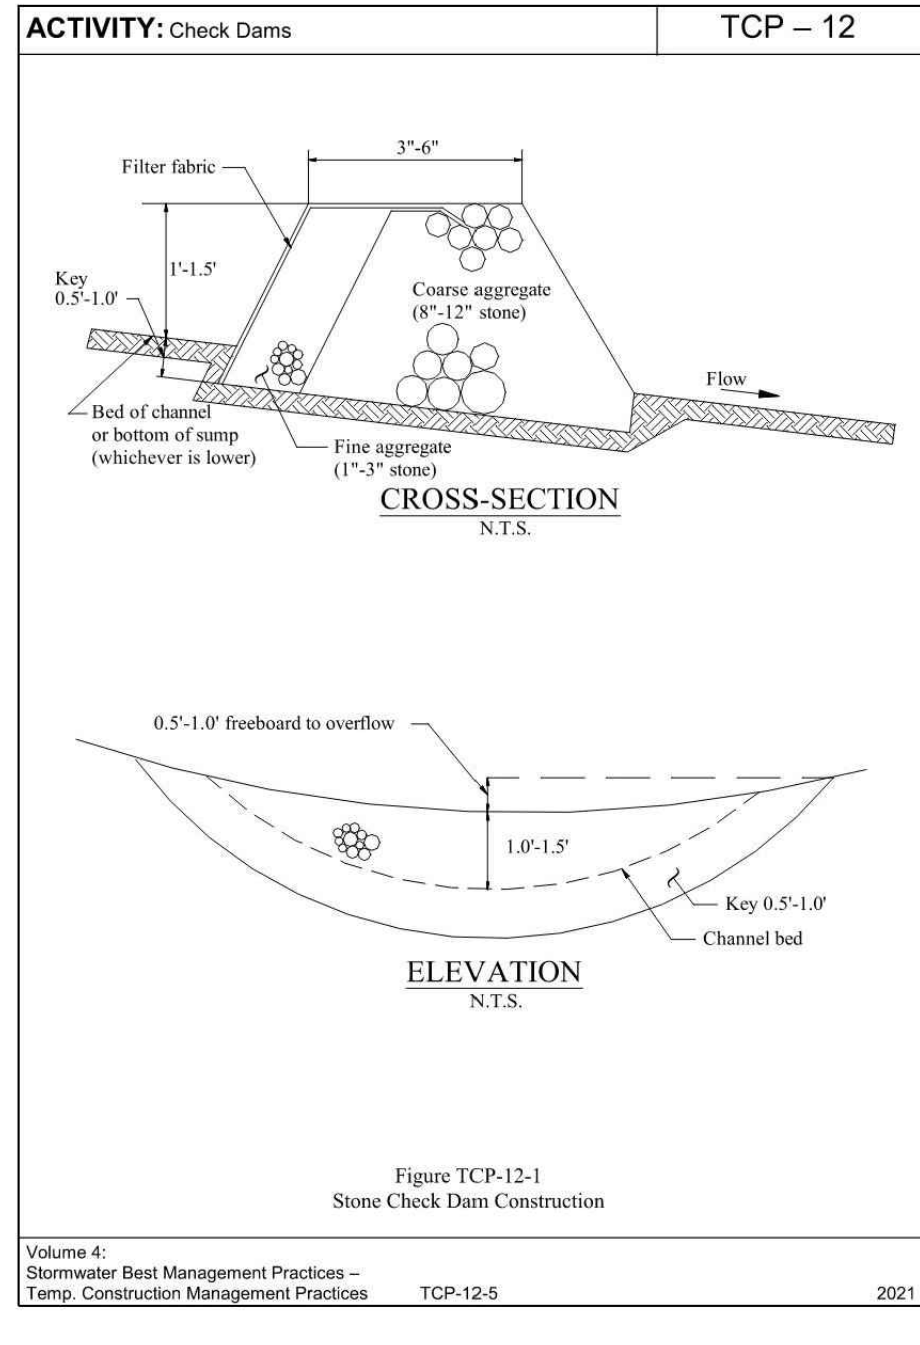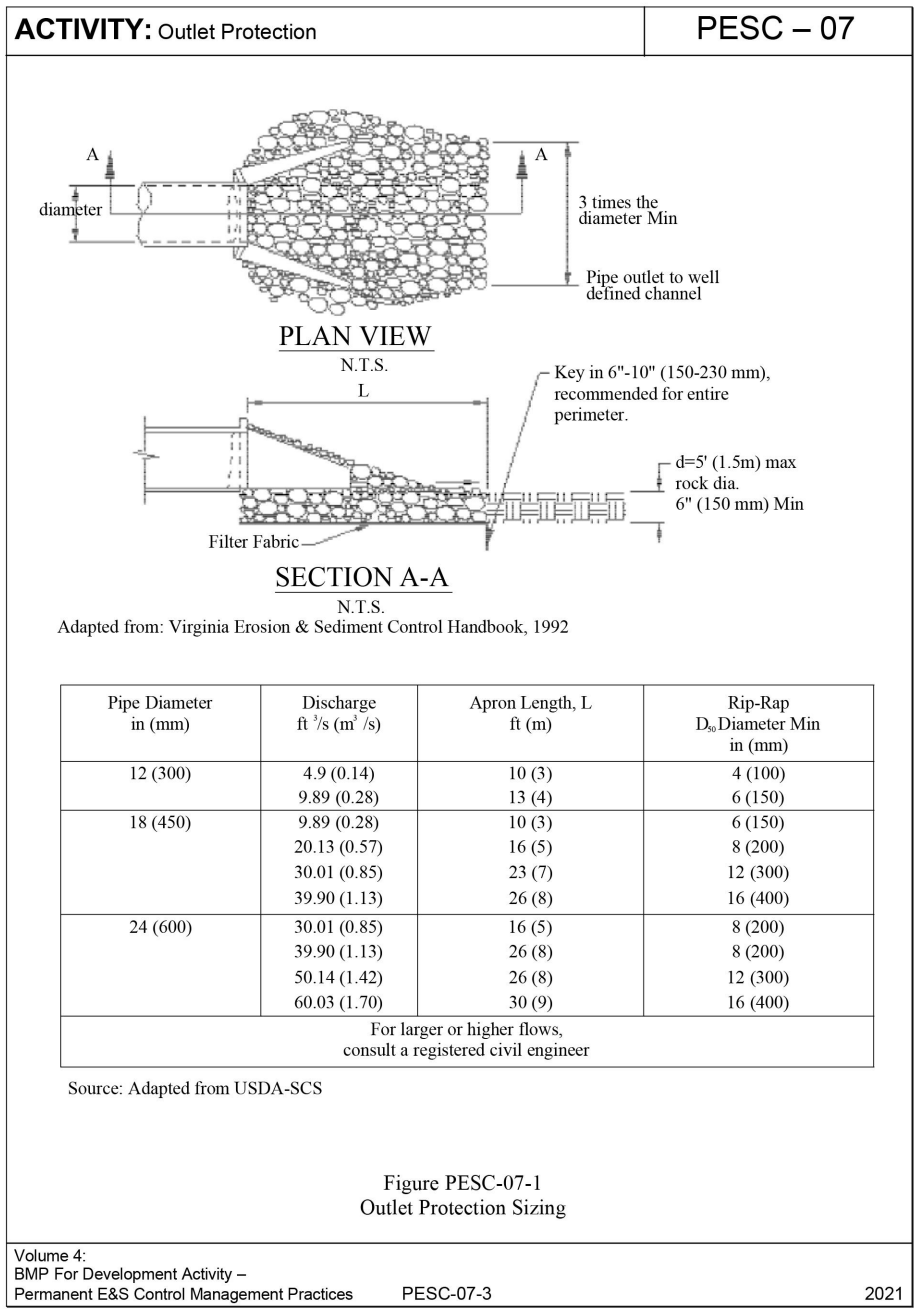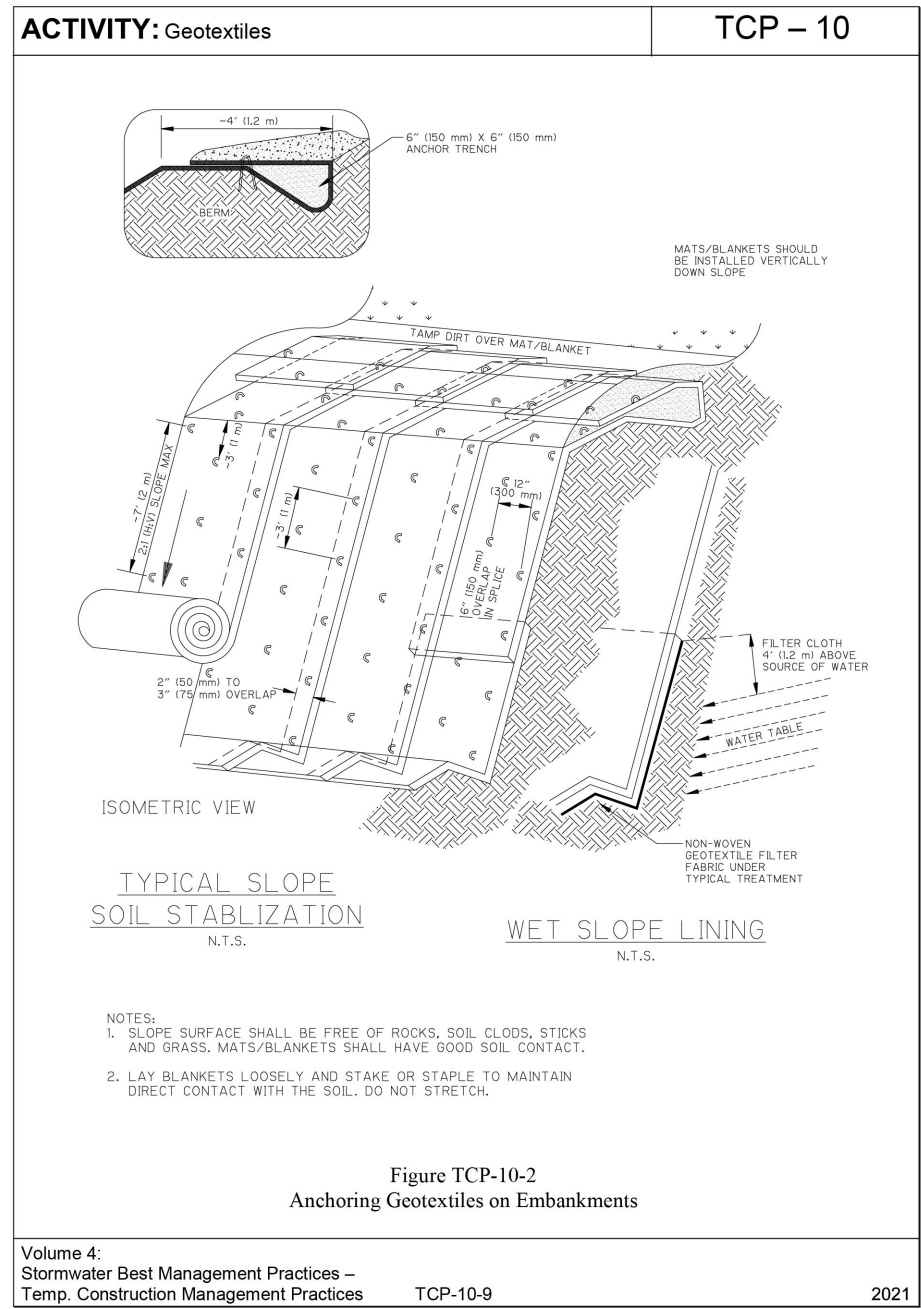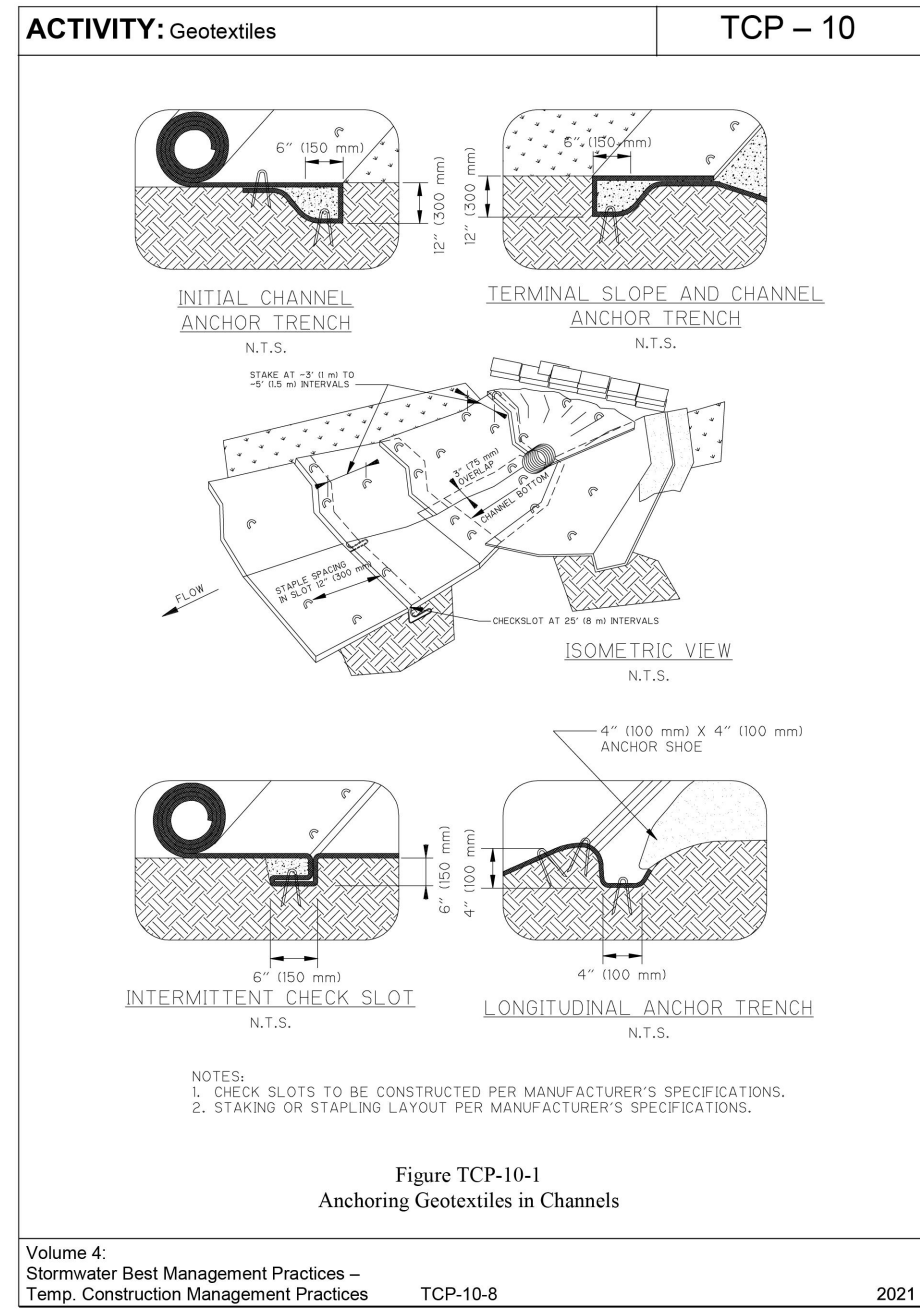

Silt Fence Maintenance Notes:


- Inspect weekly and after each rainfall.
- Repair wherever fence is damaged.
- Remove sediment when it reaches 1/3 the height of the fence.
- Inspect silt fence when rain is forecast. Perform required maintenance before the storm event.
- Remove silt fence when no longer needed. Fill and compact past holes and anchor trench remove sediment accumulation, and grade alignment to blend with adjacent ground.

Silt Fence Notes:

- Filter fabric fence to be placed prior to start of rough grading.
- Steel posts shall be approved by owner prior to use.
- Wood posts shall be 2"x 2" min., oak or similar hardwood.
- Posts shall be spaced at 6' intervals.
- Filter fabric shall be securely bound to posts with either staples or wire ties.
- Filter fabric shall be polypropylene fabric by Corps of Engineers guide spec. CW 02215. With equivalent opening size (eos) of no.100 sieve min., no.40 sieve max., as determined.
- J-Hooks to be used when silt fence is not installed along a contour.

WIRE BACK SILT FENCE DETAIL (TCP-13)


N.T.S.

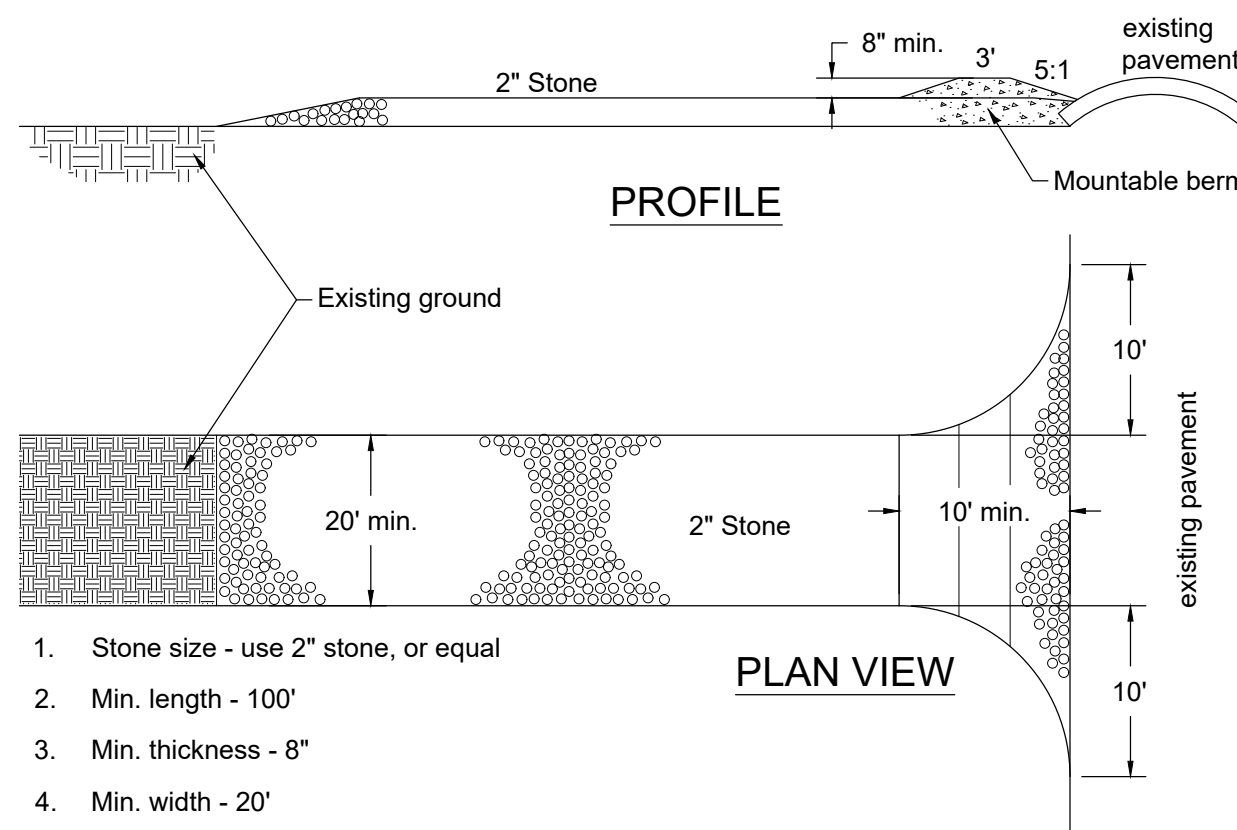

- Stone size - use 2" stone, or equal
- Min. length - 100'
- Min. thickness - 8"
- Min. width - 20'
- Filter cloth will be placed over the entire area prior to placing of stone.
- Surface water all surface water flowing or diverted toward construction entrances shall be piped across the entrance.
- Maintenance - the entrance shall be maintained in a condition which will prevent tracking or flowing of sediment onto public rights-of-way. This may require periodic top dressing with additional stone as conditions demand, and repair and/or clean out of any measures used to trap sediment. All sediment spilled, dropped, washed or tracked onto public rights-of-way must be removed immediately.

TEMPORARY CONSTRUCTION EXIT TCP-03

N.T.S.

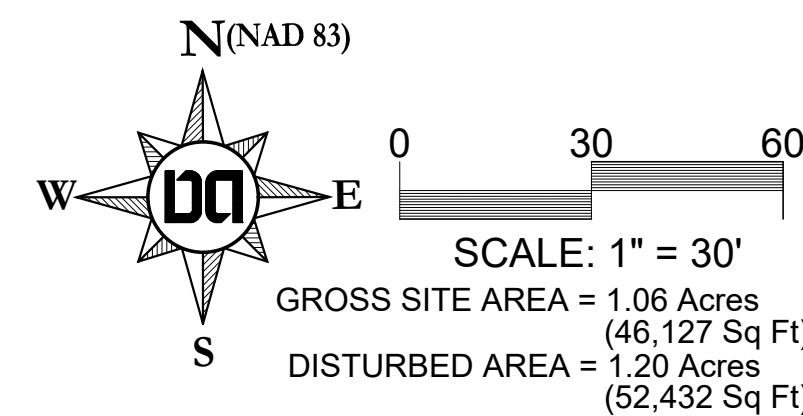


STABILIZATION OF DISTURBED SOILS

- Soil Stabilization will be accomplished by the use of seeding in the appropriate areas, as specified. Temporary seeding will be required in those areas that consist of disturbed soils that have remained dormant for periods of more than 15 days.
- As a general rule, permanent seeding will be performed within 14 days after the final grade on an area has been established. If disturbed areas on-site are to remain dormant for periods greater than 15 days in duration, the contractor will apply permanent soil stabilization. An allowance in the time schedule will be made for snow cover during periods of construction downtime. Seeding will be performed by hydro-seeding, by hand, or by a mechanical broadcasting method.
- The areas to be seeded will be uniform and will conform to the finished grade and cross Section shown in the plans for this project or as otherwise designated. Owner's representative will perform minor shaping of uneven and rough areas outside the graded section as directed in order to provide for more effective erosion control and for ease of subsequent earth moving operations.
- The seed bed (including cut slopes) will be loosened to a minimum depth of 3 inches before agricultural lime, fertilizer or seed is applied. The areas to be seeded will be cleared of stones larger than 2.5 inches in dimension, roots, and other debris.

EPSC NOTES

- ALL PERIMETER EPSC MEASURES MUST BE IN PLACE PRIOR TO GRADING.
- ANY DISTURBED AREA LEFT EXPOSED FOR A PERIOD GREATER THAN 7 DAYS WITH SLOPES GREATER THAN OR EQUAL TO 3:1 SHALL BE STABILIZED WITH MULCH OR TEMPORARY SEEDING.
- ALL SLOPES 3:1 OR GREATER AND CHANNEL SIDE SLOPES TO RECEIVE EROSION CONTROL MATTING.
- CONTRACTOR SHALL PROVIDE AN AREA FOR CONCRETE WASH DOWN AND EQUIPMENT FUELING IN ACCORDANCE WITH METRO CP-10 AND CP-13 RESPECTIVELY. CONTRACTOR TO COORDINATE EXACT LOCATION WITH NPDES DEPARTMENT DURING PRE-CONSTRUCTION MEETING. CONTROL OF OTHER SITE WASTES SUCH AS DISCARDED BUILDING MATERIALS, CHEMICALS, LITTER AND SANITARY WASTES THAT MAY CAUSE ADVERSE IMPACTS TO WATER QUALITY ARE ALSO REQUIRED BY THE GRADING PERMITTEE.

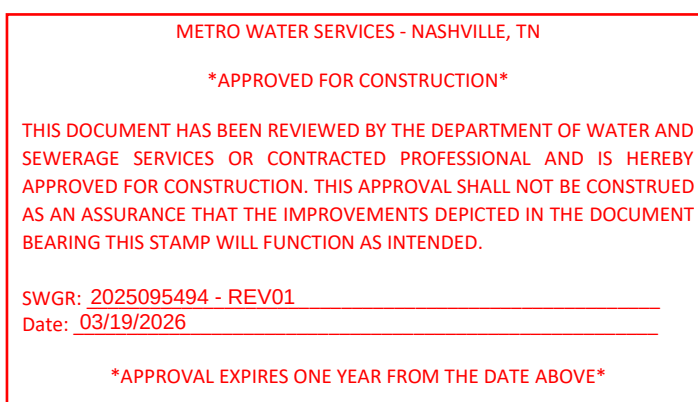

Permits	
MPC Case No	2024SP-039-002
SWGR	2025095494
MWS (Sewer)	2025-000000

Drawing Date:
August 2025


Revisions

Final SP

5655 Valley View

Parcel 74 on Tax Map 171

Brentwood, Davidson County, Tennessee

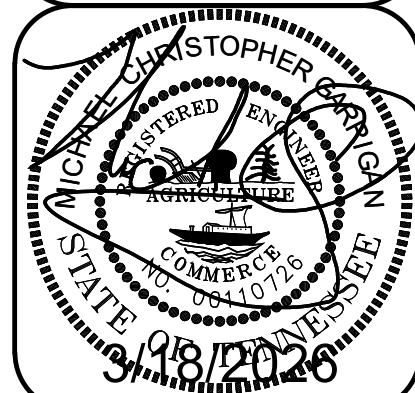



Intermediate &
Final Erosion
Control Plan

Dale & Associates

Civil Engineering
Land Planning & Zoning
Surveying

D&A Project #25095
Brentwood Chase 3
5655 Valley View

C2.1

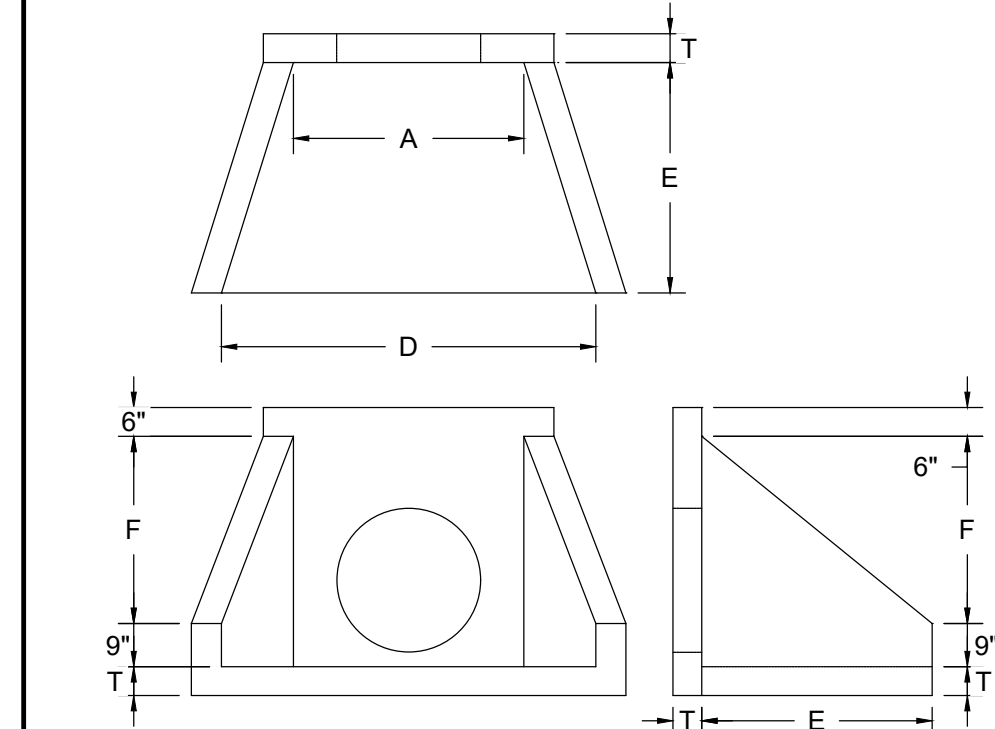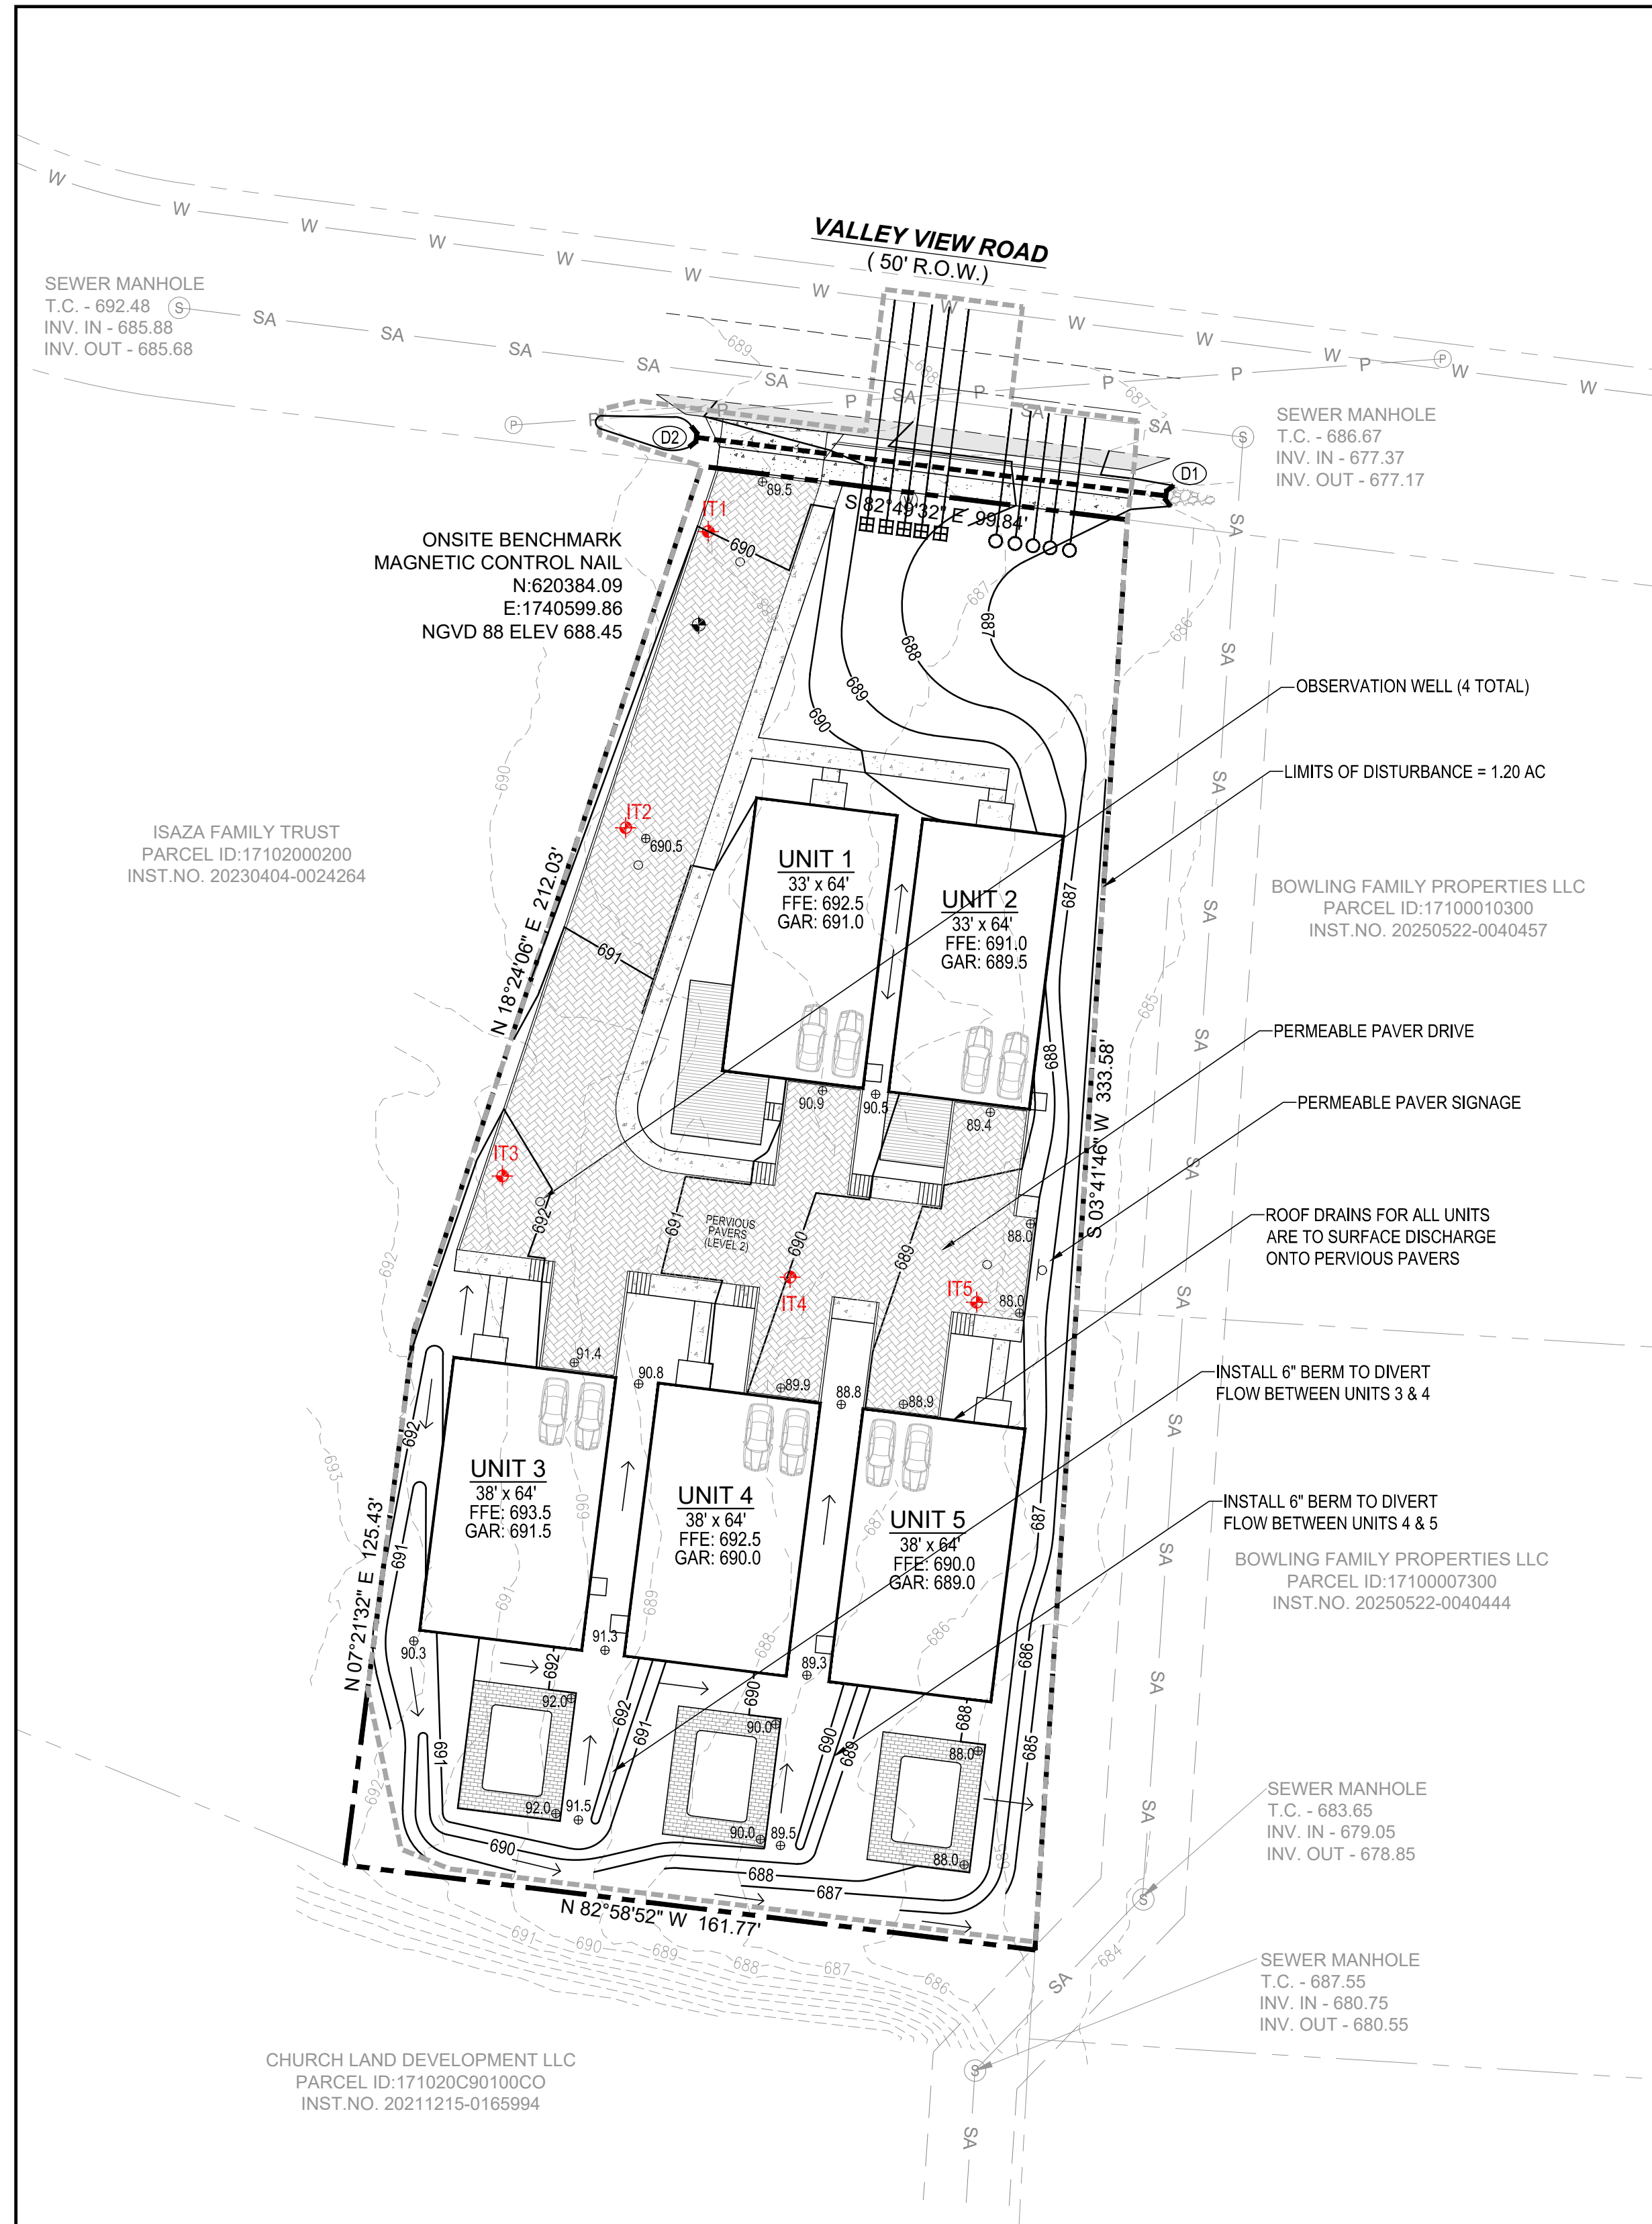


PRECAST CONCRETE HEADWALL
N.T.S.

Table of dimensions						
Size	A	D	E	F	T (min.)	
15"	2'-6"	5'-0"	2'-6"	1'-9"	6"	
18"	2'-6"	5'-0"	2'-6"	1'-9"	6"	
21"	2'-6"	5'-0"	2'-6"	1'-9"	6"	
24"	4'-0"	6'-6"	4'-0"	3'-3"	6"	
30"	4'-0"	6'-6"	4'-0"	3'-3"	6"	
36"	5'-6"	8'-0"	3'-6"	4'-5"	6"	
42"	5'-6"	8'-0"	3'-6"	4'-5"	6"	
48"	5'-6"	8'-0"	3'-6"	4'-5"	6"	
54"	7'-0"	9'-5"	4'-6"	5'-9"	6"	
60"	7'-0"	9'-5"	4'-6"	5'-9"	6"	
66"	8'-6"	11'-0"	5'-6"	6'-11"	6"	
72"	8'-6"	11'-0"	5'-6"	6'-11"	6"	

- NOTES:
- Concrete shall be 4000 psi @ 28 days reinforced with #4 bars @ 10" o.c., each way with wings and toe slab doweled to headwall with #5 bars
 - 3/4" chamfer on all exposed edges.

PERMEABLE PAVERS DETAIL (GIP-03)

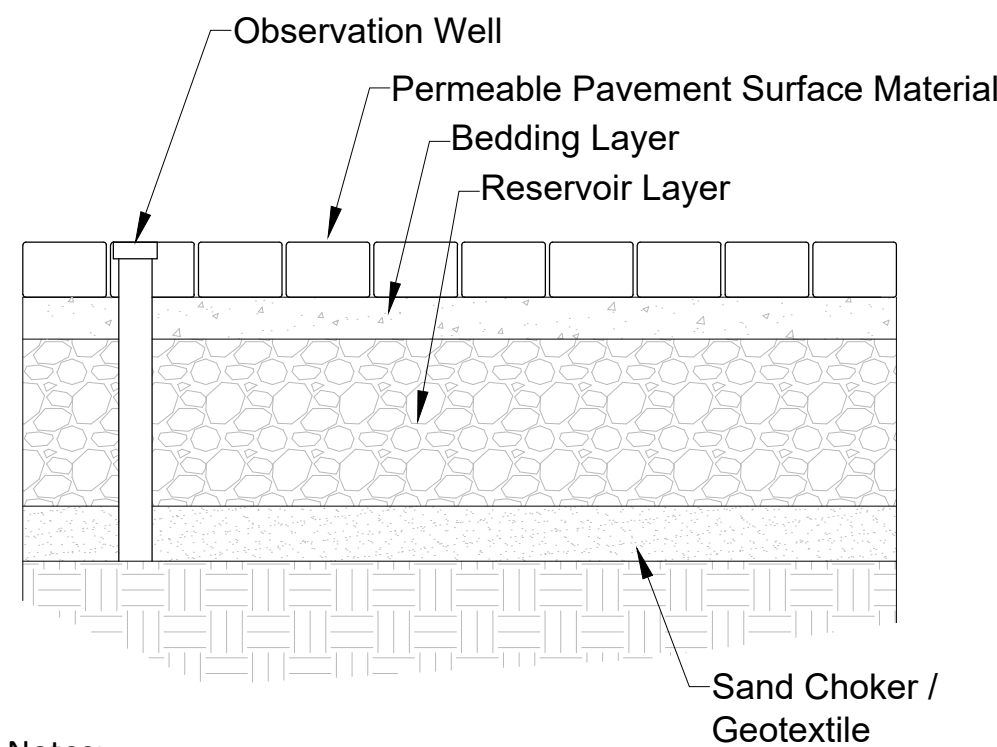

Detail Notes:

- Vehicular traffic shall be prohibited on the pervious pavement until the site is stable to prevent sediment from being deposited by vehicles.
- Contractor, Engineer, or Owners Representative shall notify MWS NPDES Staff at least 48 hours prior to the installation of the pervious layer to observe the sub-base material.

Permeable Pavers Without Underdrain Material Specifications		
Material	Specifications	Notes
Permeable Pavement System	Permeable Interlocking Concrete Pavers ¹	¹ ASTM C936
Bedding Layer *	#8 or #89 clean washed stone	Meet TDOT Construction Specifications.
Reservoir Layer *	#57 or #2 clean washed stone	Meet TDOT Construction Specifications.
Observation Well	6-inch SDR 35 PVC pipe with vented cap and anchor plate	Use traffic rated casting where required. Number of wells equals the number of test pits required for infiltration testing (see Appendix 1-A)
Sand Choker / * Geotextile	2- to 4-inch layer of coarse sand ¹ Filter fabric (125 gsm/sq.ft.)	¹ Meet TDOT Construction Specifications ² ASTM M288-06, ASTM D4491 & D4751

*Item receipts may be required to be included with as-built submittal.

Permeable Paver Number :		
	Design	As-Built
Treatment Volume (Tv), CF	7,354 CF	
Surface Area, SF	9,192 SF	
Overflow (TO) Elevation*	688.0	
Reservoir Depth	24"	
Underdrain Invert Depth*	N/A	
Outlet Elevation*	N/A	
* N/A if not required		
All elevations shall be NAVD88		

Developer Asbuilt Note

In accordance with the Metro Stormwater Management Manual, Volume 1, Section 3.9, As-Built Certifications, MWS Stormwater Division must approve the following as-builts prior to issuance of the Use & Occupancy Permit:


- A certification letter from TN registered P.E. stating that the site has been inspected and that the stormwater management system and stormwater control measures (both structural and non-structural) are complete and functional in accordance with the plans approved by MWS.
- An as-built LID spreadsheet.
- Hydrologic and hydraulic calculations for as-built conditions, as required.
- As-built drawings showing final topographic features of all these facilities. This shall include invert elevations of outlet control structures.
- Any deviations from the approved plans shall be noted on as-built drawings submitted.
- Copy of as-built plan CAD file on a CD and should be registered to the TN State Plane Coordinate System, North American Datum 1983 (NAD83). Data should be placed in separate layers and should be labeled / named for easy identification.
- Cut and fill balance certification for floodplain and sinkhole alterations.
- Water quality buffers shall be surveyed and included with the as-built submittal.
- Any public (to become the responsibility of Metro to maintain) stormwater infrastructure shall be video-inspected to verify proper installation with the video recording and any associated inspection report submitted as part of as-built record.
- Additional testing may be required as/if warranted by video inspection.

STORM STRUCTURE SCHEDULE

Structure Label	Structure Type	T.C. Elev.	Invert In	Invert Out
D1	18" Headwall	688.0	685.0	-----
D2	18" Headwall	690.5	-----	687.5

STORM PIPE SCHEDULE

Downstream Structure	Invert	Upstream Structure	Invert	Pipe Size	Length (ft)	Slope (%)
D1	685.0	D2	687.5	18" RCP	109	2.29

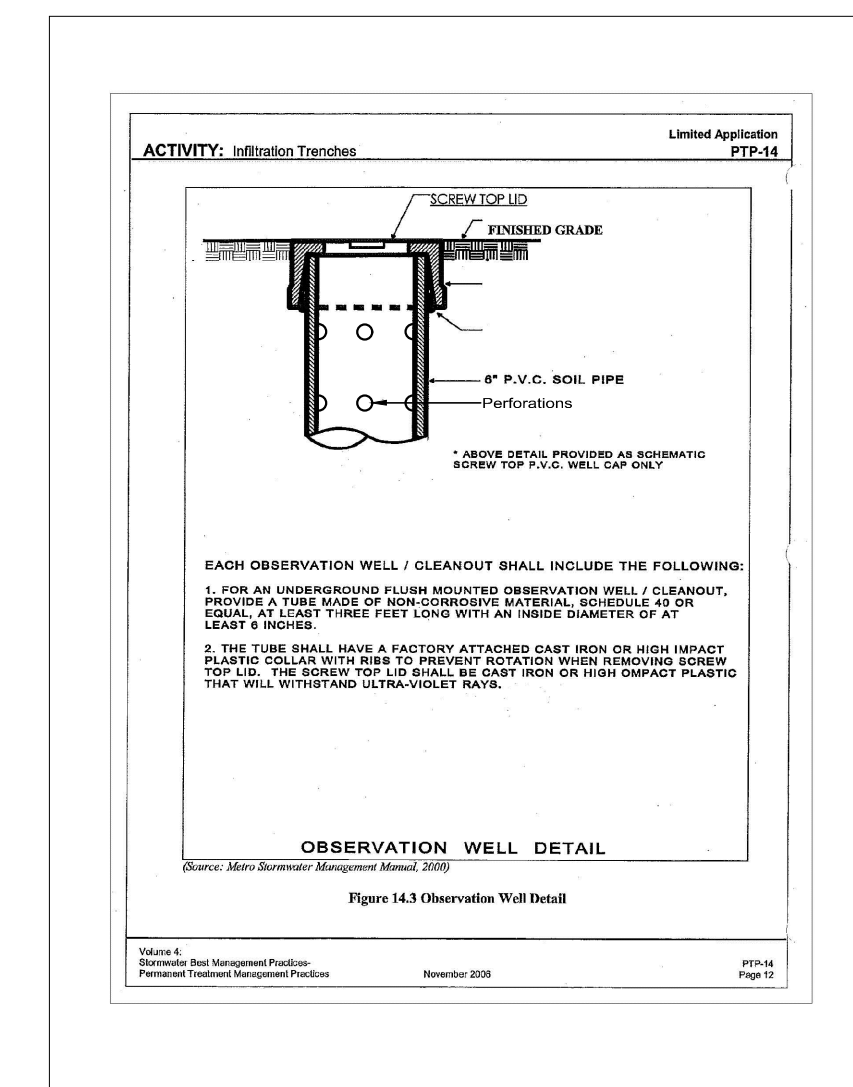


Regulated Stormwater Treatment Structure

PERVIOUS PAVEMENT


Requires Routine Inspections and Maintenance.

For more information contact Metro Nashville Stormwater NPDES: 615-880-2420

PERMEABLE PAVER PROFILE

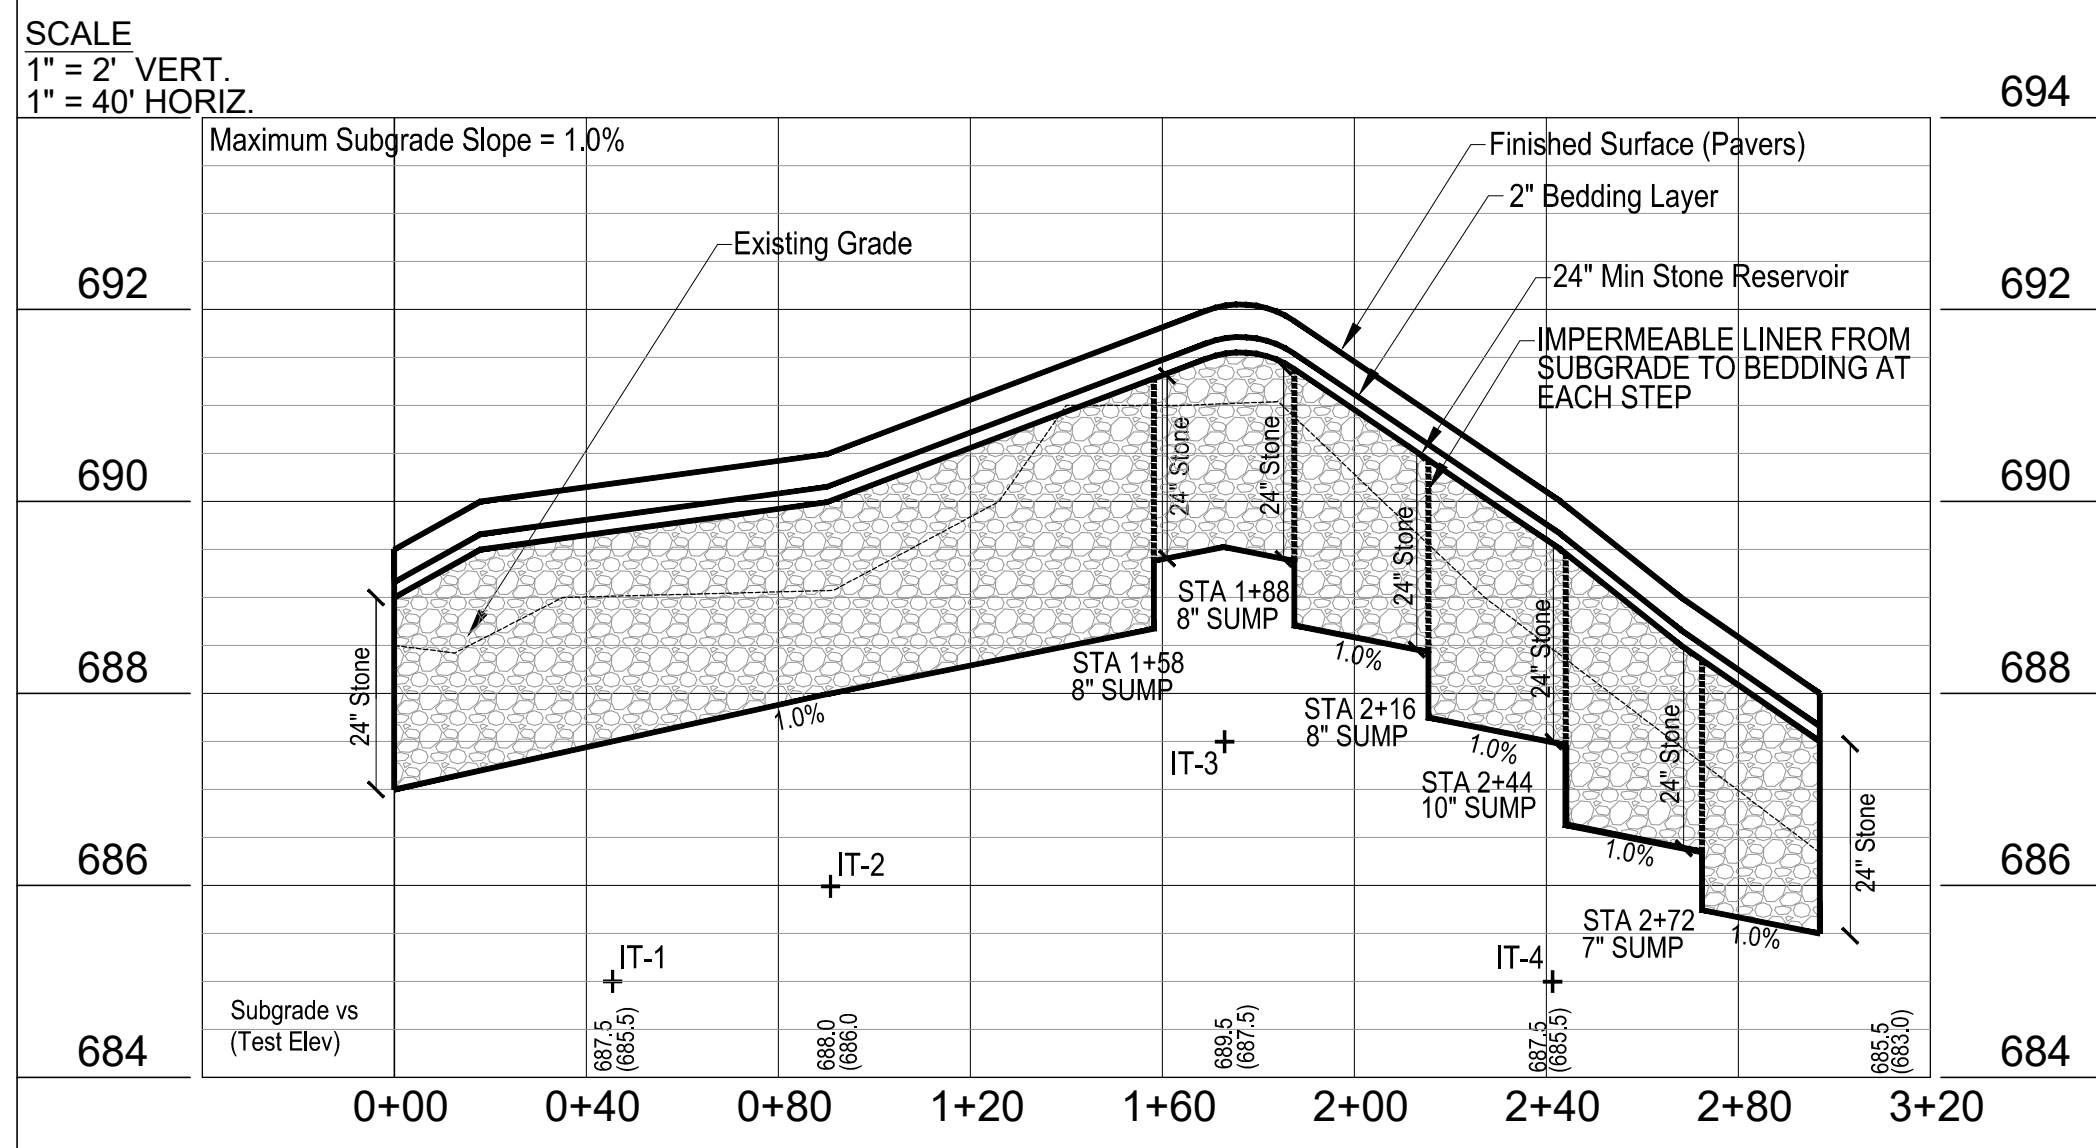

STORM INFRASTRUCTURE PROFILE STRUCTURE D1 - D2

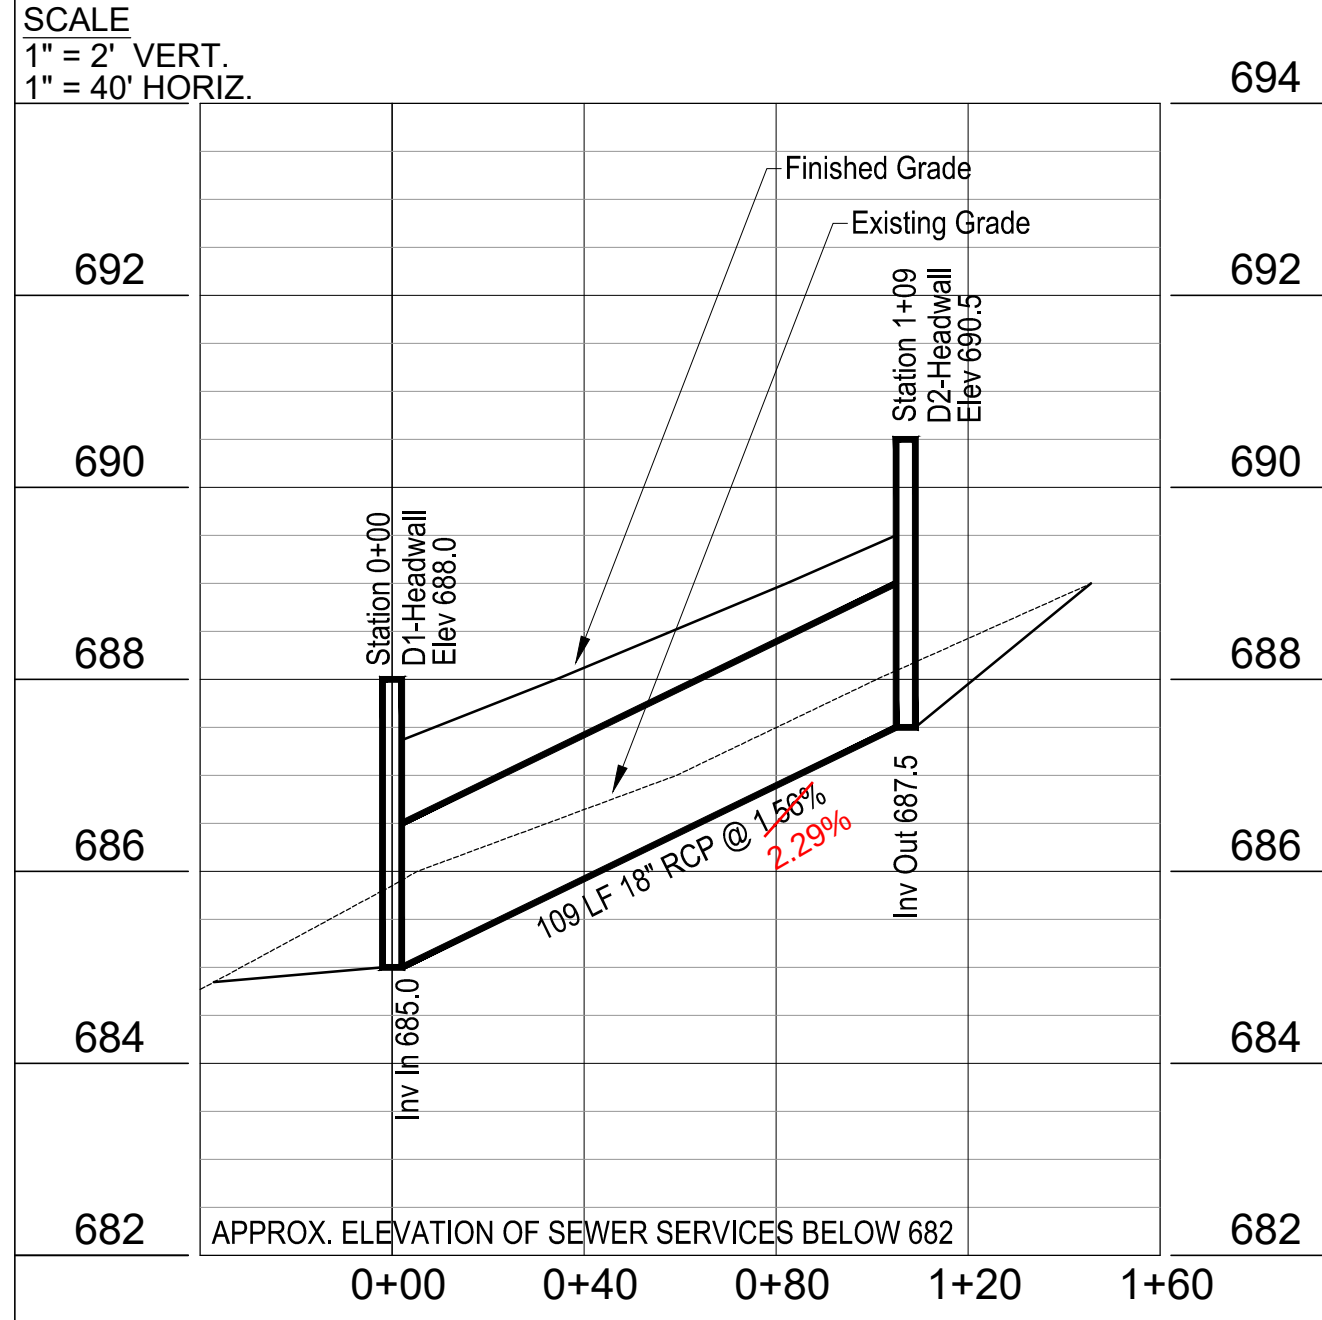



METRO WATER SERVICES - NASHVILLE, TN

APPROVED FOR CONSTRUCTION

THIS DOCUMENT HAS BEEN REVIEWED BY THE DEPARTMENT OF WATER AND SEWERAGE SERVICES OR CONTRACTED PROFESSIONAL AND IS HEREBY APPROVED FOR CONSTRUCTION. THIS APPROVAL SHALL NOT BE CONSTRUED AS AN ASSURANCE THAT THE IMPROVEMENTS DEPICTED IN THE DOCUMENT BEARING THIS STAMP WILL FUNCTION AS INTENDED.

SWGR: 2025095494 - REV01
Date: 03/19/2026

APPROVAL EXPIRES ONE YEAR FROM THE DATE ABOVE

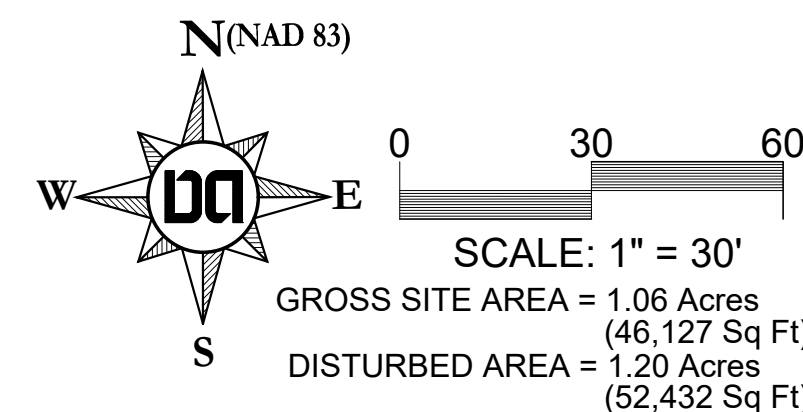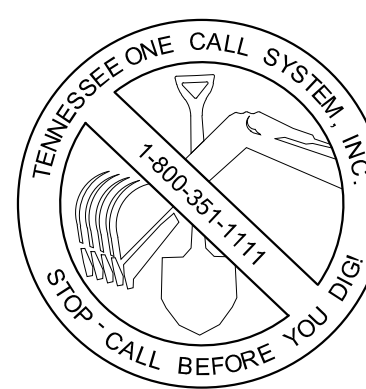

Permits	
MPC Case No	2024SP-039-002
SWGR	2025095494
MWS (Sewer)	2025-.....

Dale & Associates

Civil Engineering
Land Planning & Zoning
Surveying

Drawing Date:
August 2025


Revisions

Final SP

5655 Valley View

Parcel 74 on Tax Map 171

Brentwood, Davidson County, Tennessee

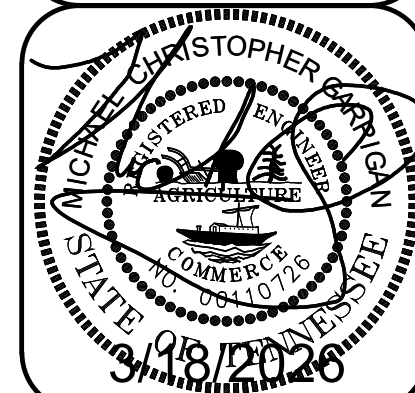

Site Grading &
Drainage Plan

D&A Project #25095
Brentwood Chase 3
5655 Valley View

C3.0